

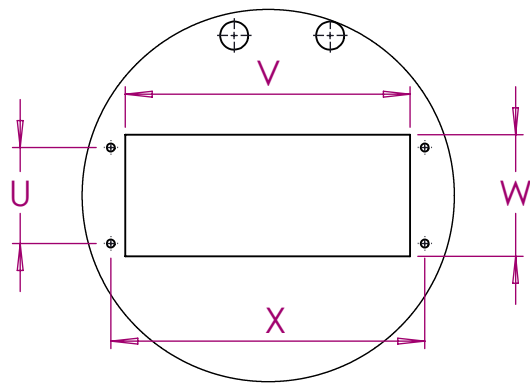
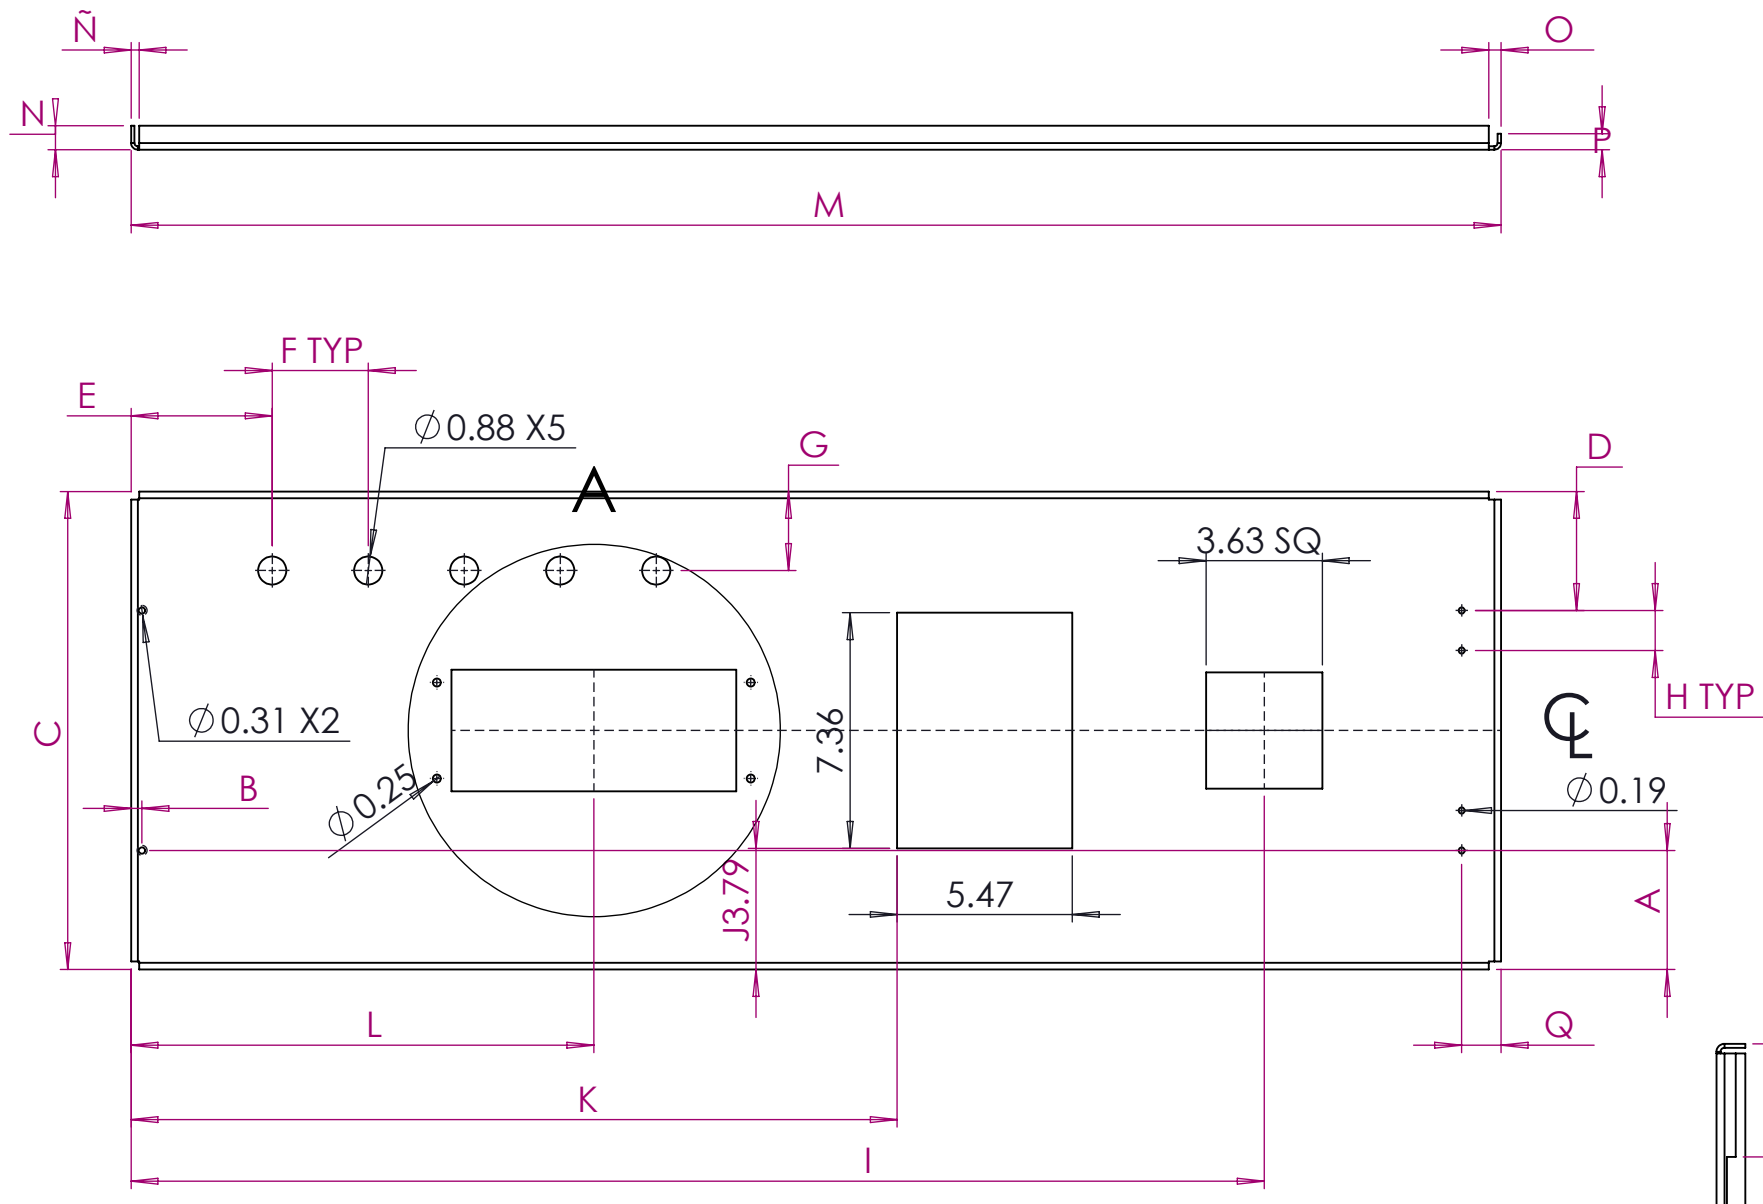


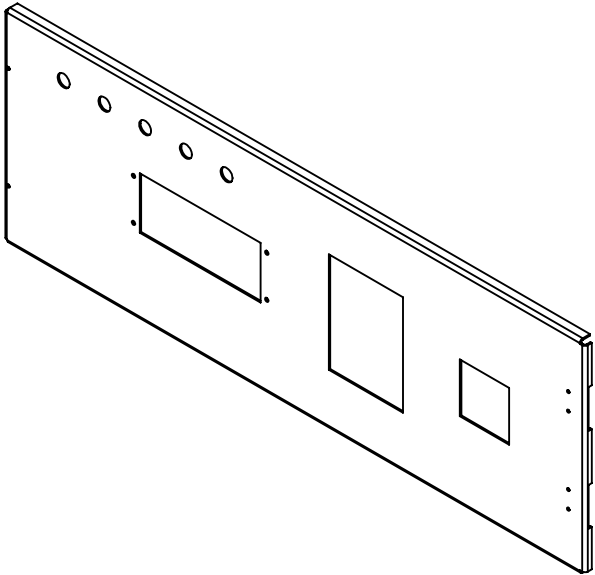

DETALLE A

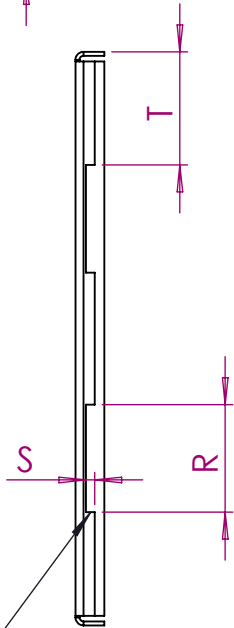

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	3.720	3.705	3.735				
B	0.340	0.325	0.355				
C	14.940	14.925	14.955				
D	3.720	3.705	3.735				
E	4.410	4.395	4.425				
F	3.000	2.985	3.015				
G	2.470	2.455	2.485				
H	1.250	1.235	1.265				
I	35.410	35.395	35.425				
J	3.790	3.775	3.805				
K	23.940	23.925	23.955				
L	14.460	14.445	14.475				
M	42.810	42.795	42.825				
N	0.750	0.735	0.765				
Ñ	0.250	0.235	0.265				
O	0.380	0.365	0.395				
P	0.500	0.485	0.515				
Q	1.230	1.215	1.245				
R	2.800	2.785	2.815				
S	0.230	0.215	0.245				
T	2.950	2.935	2.965				
U	3.000	2.985	3.015				
V	8.900	8.885	8.915				
W	3.800	3.785	3.815				
X	9.810	9.795	9.825				

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm	-		

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



46W X 15H MTR DOOR			
Dwn: AWV	25/03/2026	Chk: AWV	25/03/2026

Dwn No: P19500-18-(12gacr ANSI-61) - K47 - V1-R0	Rev: 00
Apvd: AWV	25/03/2026
Sht 1 of 1	

