


No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	47.130	47.115	47.145				
2	LASER	5.799	5.784	5.814				
3	LASER	0.310	0.295	0.325				
4	LASER	0.230	0.215	0.245				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	P19657-01-(12gacr ANSI-61) - K61 - V0-R0	20/07/2026	61	5.799	47.130	0.105



Tolerances:
.XX $\pm$.030
.XXX $\pm$.015
Angular $\pm$ 2°
Units are in inches

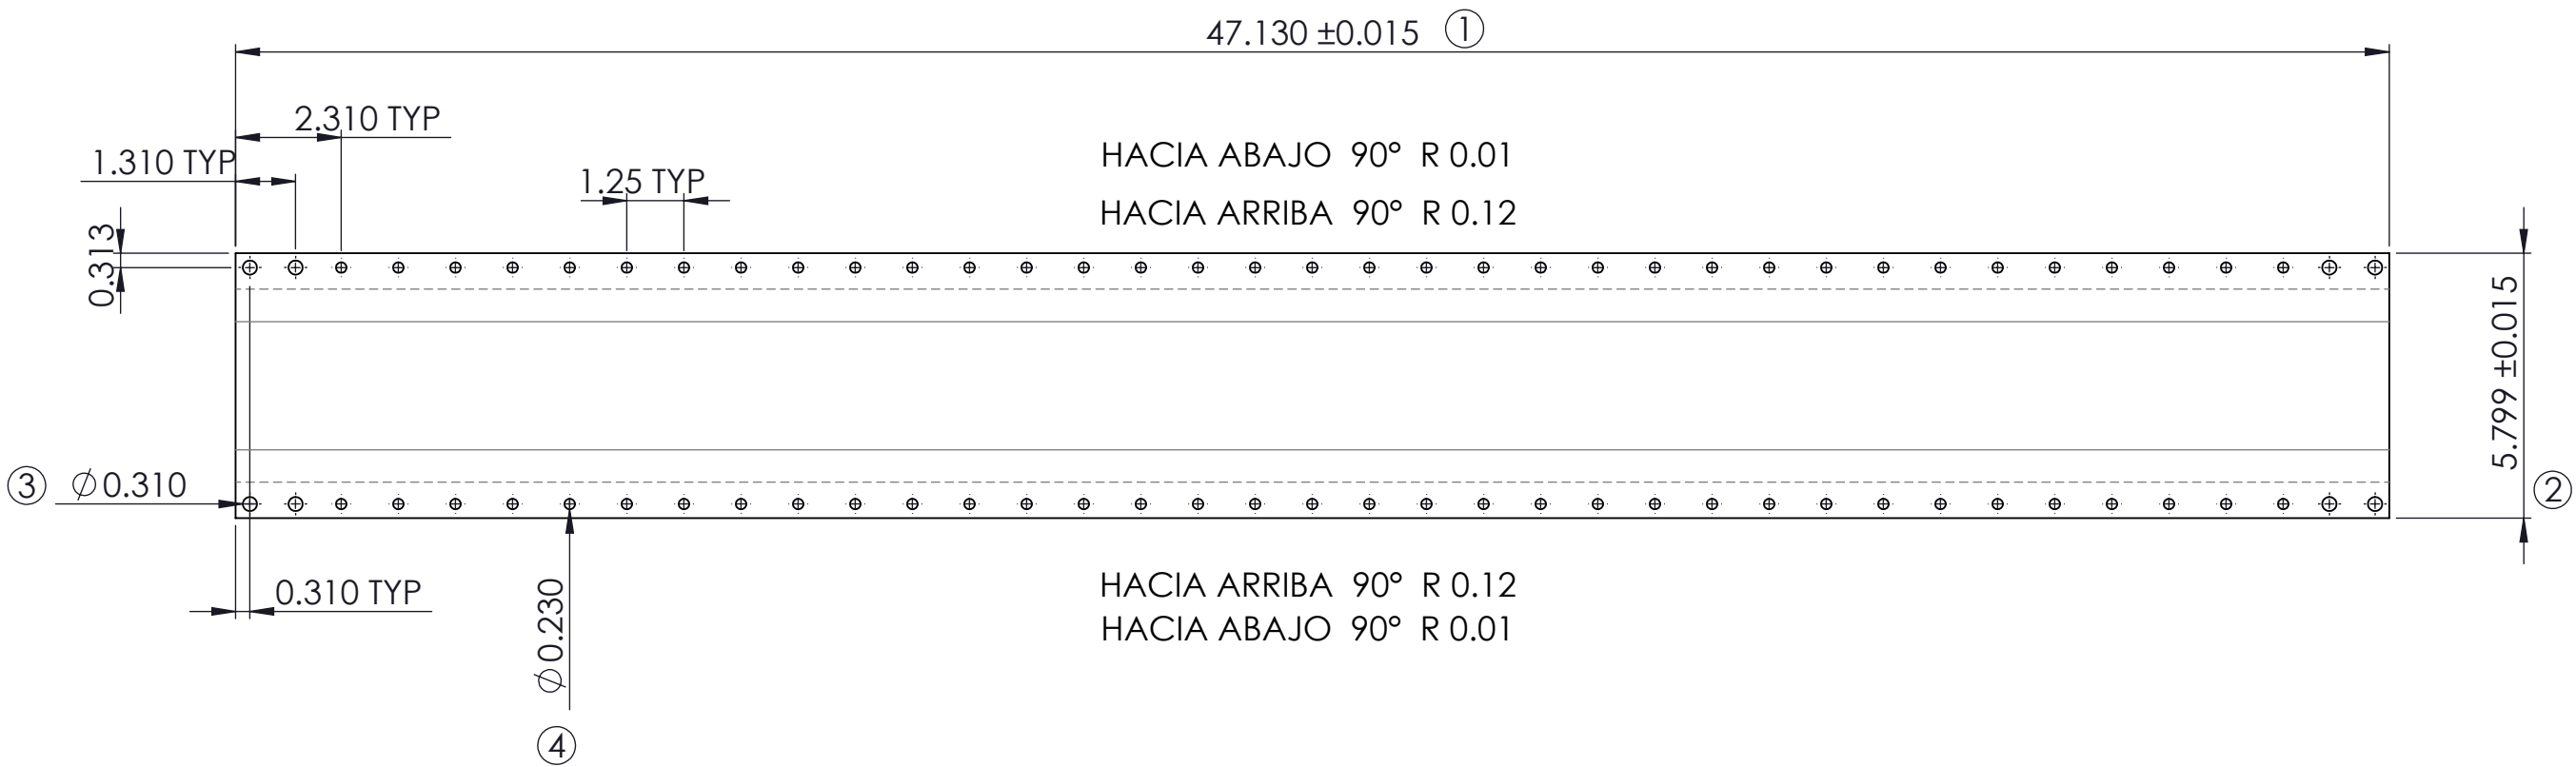

INTERM. UPRIGHT			
Dwn: JRFM	20/07/2026	Chk: JRFM	20/07/2026

Dwn No: P19657-01-(12gacr ANSI-61) - K61 - V0-R0	Rev: 01
Apvd: JRFM	Sht 1 of 1

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	47.130	47.115	47.145				
B	0.310	0.295	0.325				
C	0.310	0.295	0.325				
D	1.310	1.295	1.325				
E	2.310	2.295	2.325				
F	1.250	1.235	1.265				
G	0.770	0.755	0.785				
H	0.750	0.735	0.765				
I	4.500	4.485	4.515				
J	0.750	0.735	0.765				
K	0.880	0.865	0.895				






TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	16 mm			

Tolerances:			INTERM. UPRIGHT				Dwn No: P19657-01-(12gacr ANSI-61) - K61 - V0-R0		Rev: 01
.XX ±	.030								
.XXX ±	.015								
Angular ±	2°								
Units are in inches			Dwn: JRFM	20/07/2026	Chk: JRFM	20/07/2026	Apvd: JRFM	20/07/2026	Sht 1 of 1

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

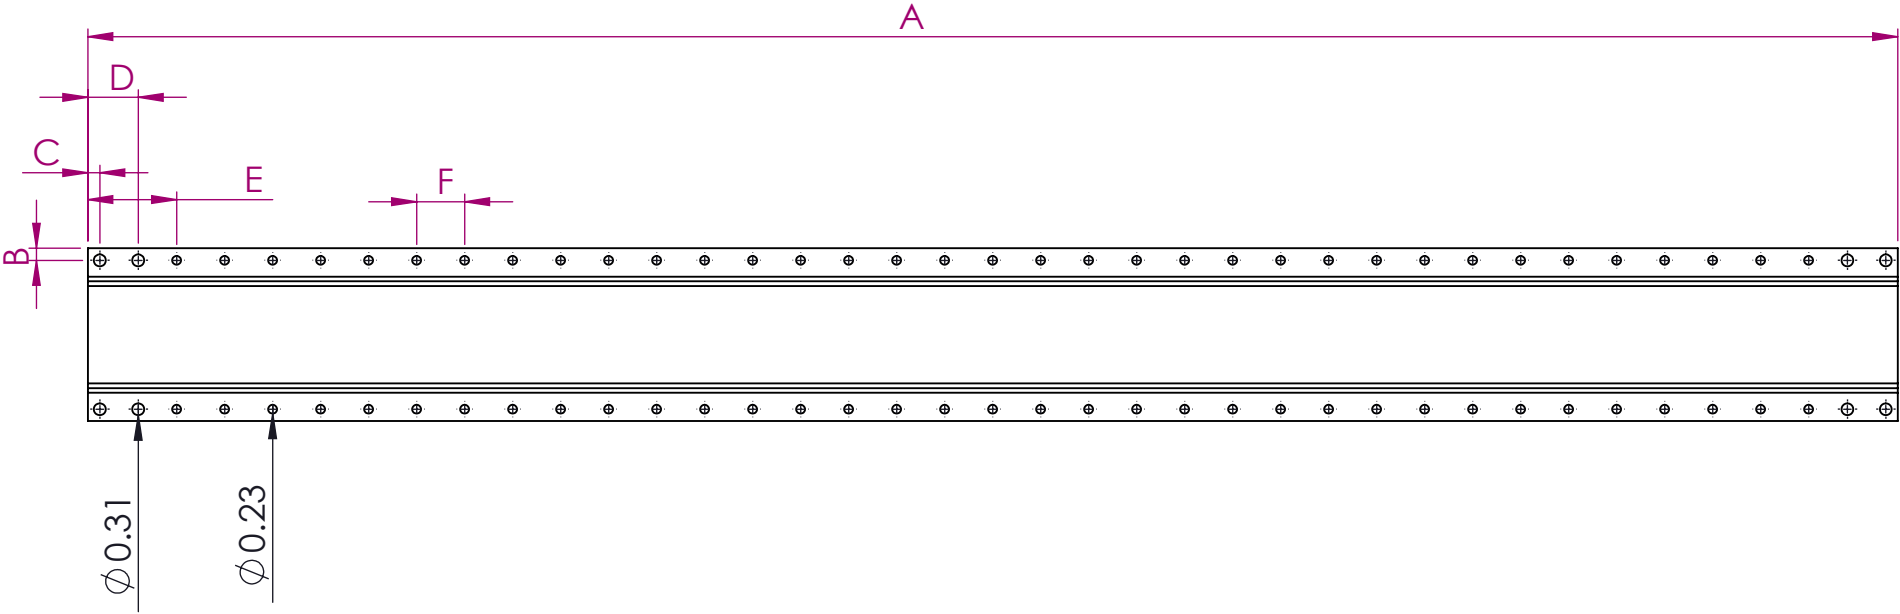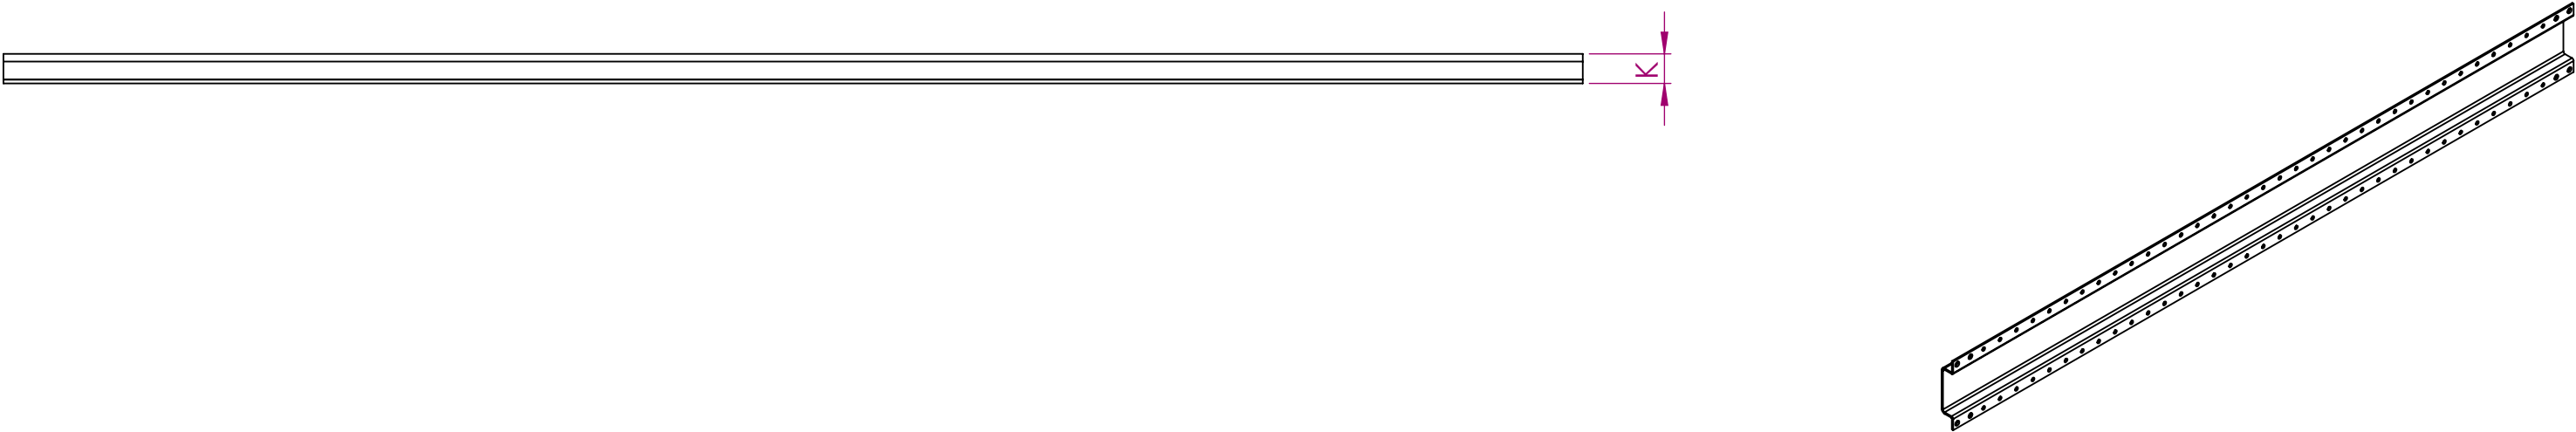

INTERM. UPRIGHT			
Dwn: JRFM	20/07/2026	Chk: JRFM	20/07/2026

Dwn No: P19657-01-(12gacr ANSI-61) - K61 - V0-R0		Rev: 01	
Apvd: JRFM	20/07/2026	Sht 1 of 1	