




No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	48.737	48.722	48.752				
2	LASER	16.107	16.092	16.122				
3	LASER	46.940	46.925	46.955				
4	LASER	13.810	13.795	13.825				
5	LASER	0.310	0.295	0.325				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	P19657-25-(16gacr ANSI-61) - K48 - V0-R0	16/07/2026	0.48	16.107	48.737	0.060

CORTE

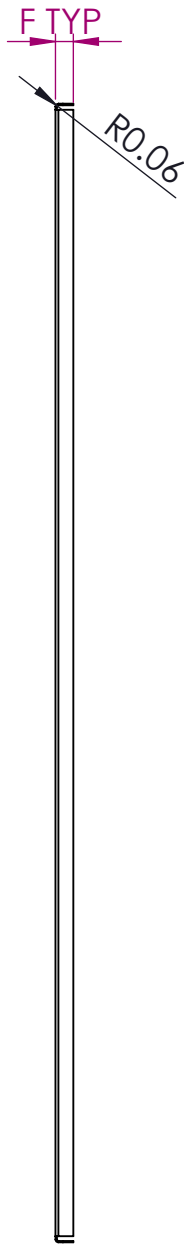

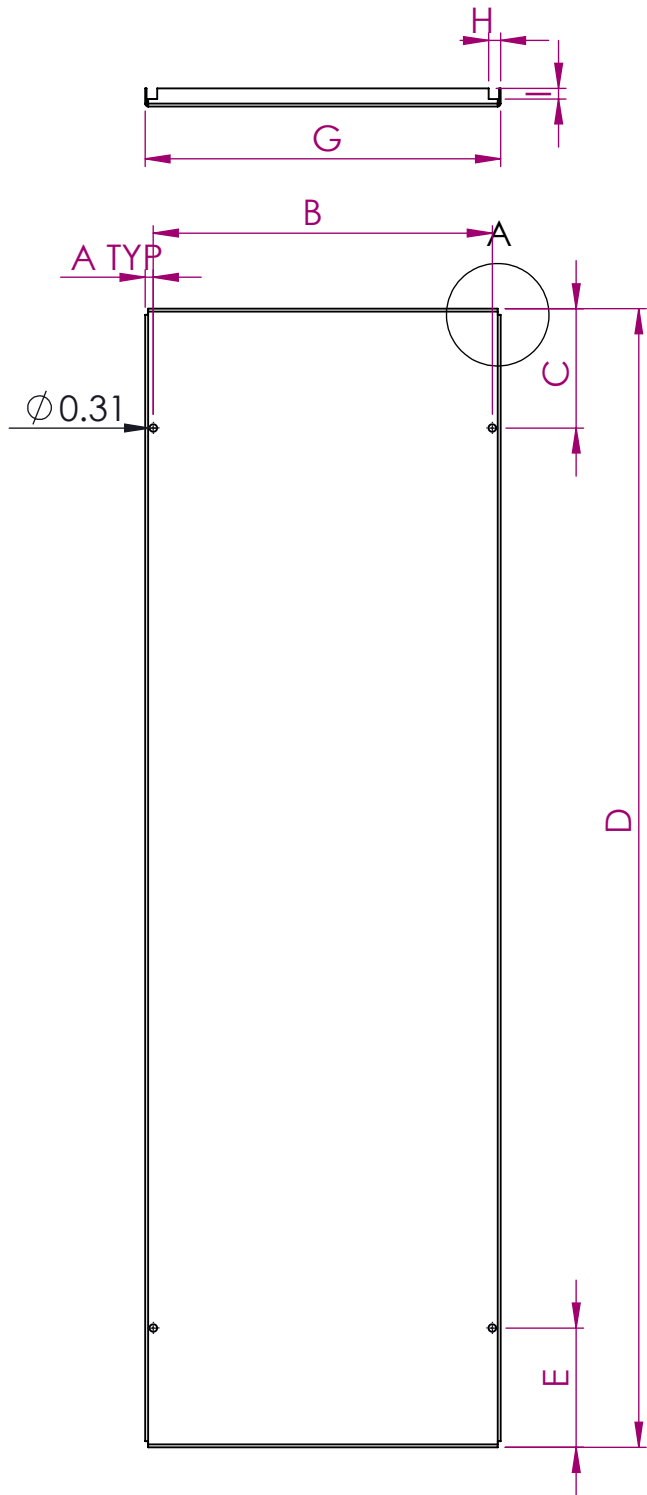

DETALLE A
ESCALA 1 : 4

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.340	0.325	0.355				
B	14.120	14.105	14.135				
C	4.970	4.955	4.985				
D	47.440	47.425	47.455				
E	4.970	4.955	4.985				
F	0.750	0.735	0.765				
G	14.810	14.795	14.825				
H	0.500	0.485	0.515				
I	0.440	0.425	0.455				

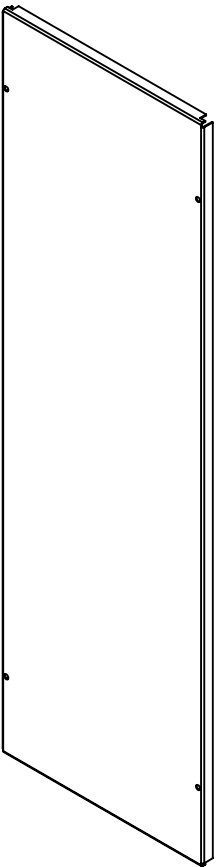


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



47.5H X 15D SIDE COVER			
Dwn: JRFM	16/07/2026	Chk: JRFM	16/07/2026

Dwn No: P19657-25-(16gacr ANSI-61) - K48 - V0-R0	Rev: 00
Apvd: JRFM	Sht 1 of 1