
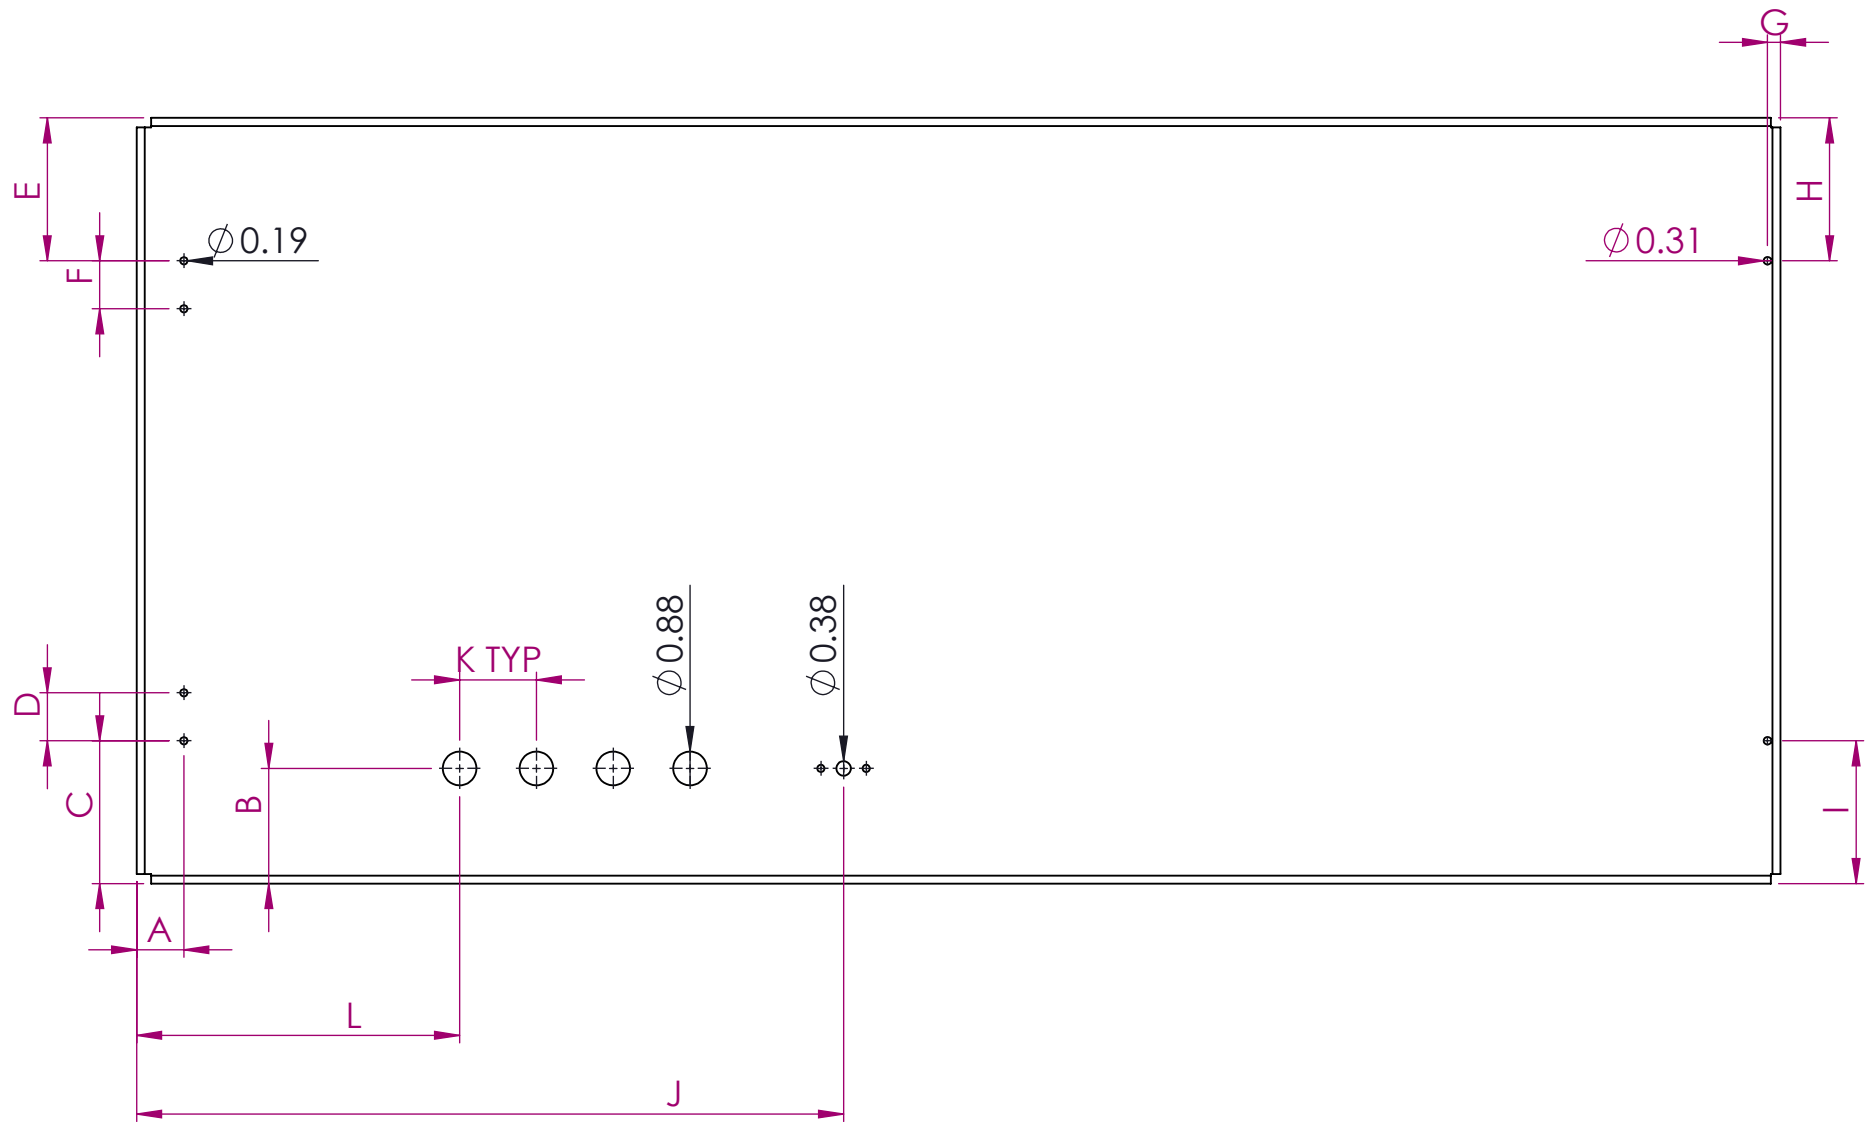


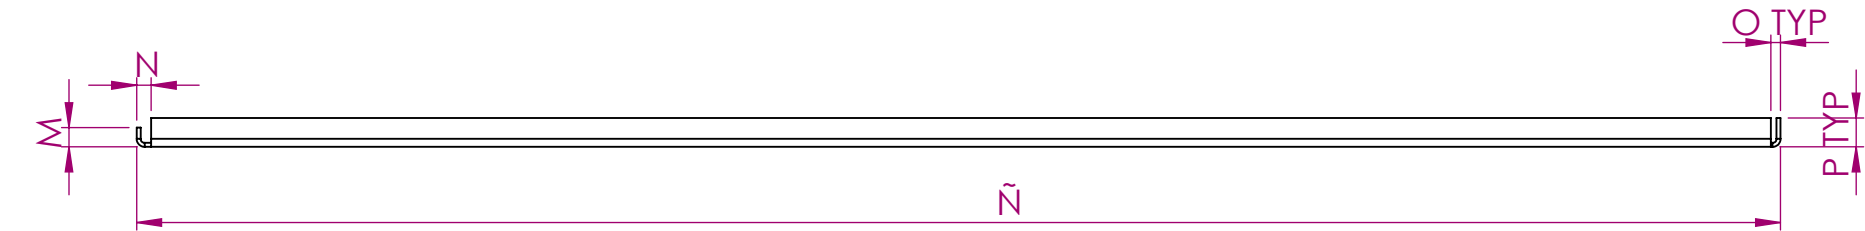

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	1.230	1.215	1.245				
B	3.000	2.985	3.015				
C	3.720	3.705	3.735				
D	1.250	1.235	1.265				
E	3.720	3.705	3.735				
F	1.250	1.235	1.265				
G	0.340	0.325	0.355				
H	3.720	3.705	3.735				
I	3.720	3.705	3.735				
J	18.410	18.395	18.425				
K	2.000	1.985	2.015				
L	8.410	8.395	8.425				
M	0.500	0.485	0.515				
N	0.380	0.365	0.395				
Ñ	42.810	42.795	42.825				
O	0.250	0.235	0.265				
P	0.750	0.735	0.765				
Q	2.950	2.935	2.965				
R	2.800	2.785	2.815				
S	0.230	0.215	0.245				
T	19.940	19.925	19.955				


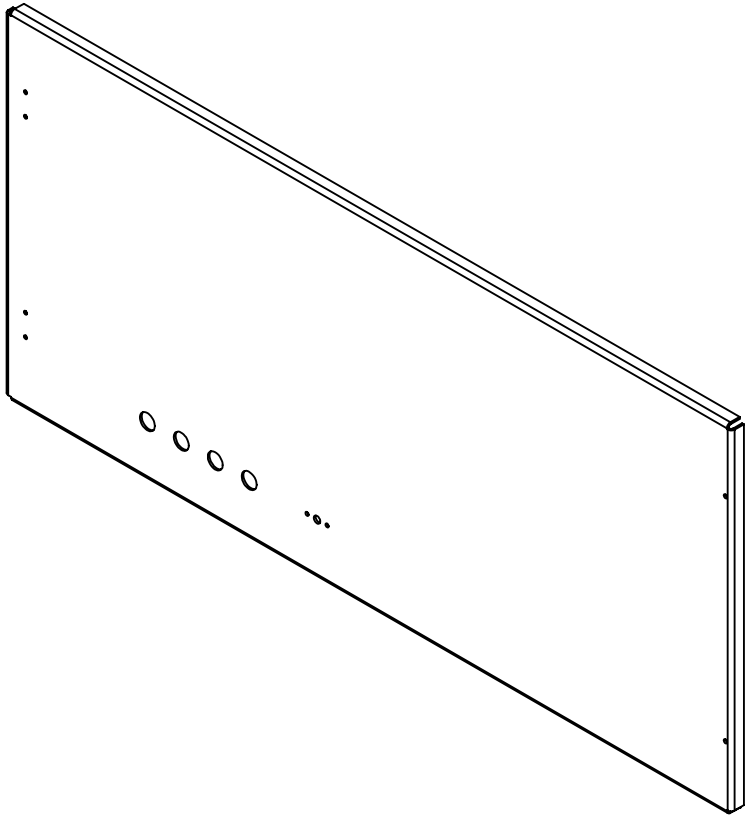


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

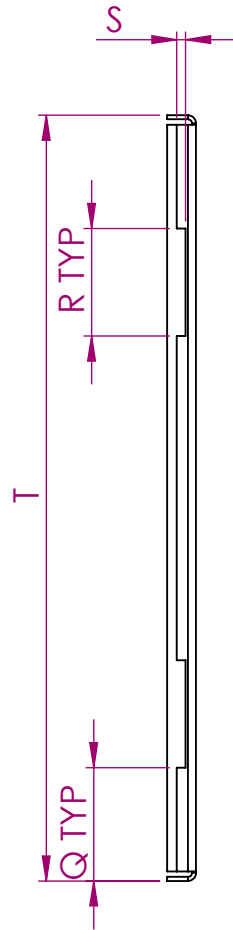

46W 20H COMPARTMENT DOOR			
Dwn: JRFM	21/07/2026	Chk: JRFM	21/07/2026

Dwn No: P19660-14-(12gacr ANSI-61) - K48 - V2-R0		Rev: 00
Apvd: JRFM	21/07/2026	Sht 1 of 1