



No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	44.109	44.094	44.124				
2	LASER	18.739	18.724	18.754				
3	LASER	42.564	42.549	42.579				
4	LASER	16.940	16.925	16.955				
5	LASER	0.312	0.297	0.327				
6	LASER	0.147	0.132	0.162				
7	LASER	2.940	2.925	2.955				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	P19671-05-(16gacr ANSI-61) - K48 - V0-R0	17/07/2026	0.48	18.739	44.109	0.060

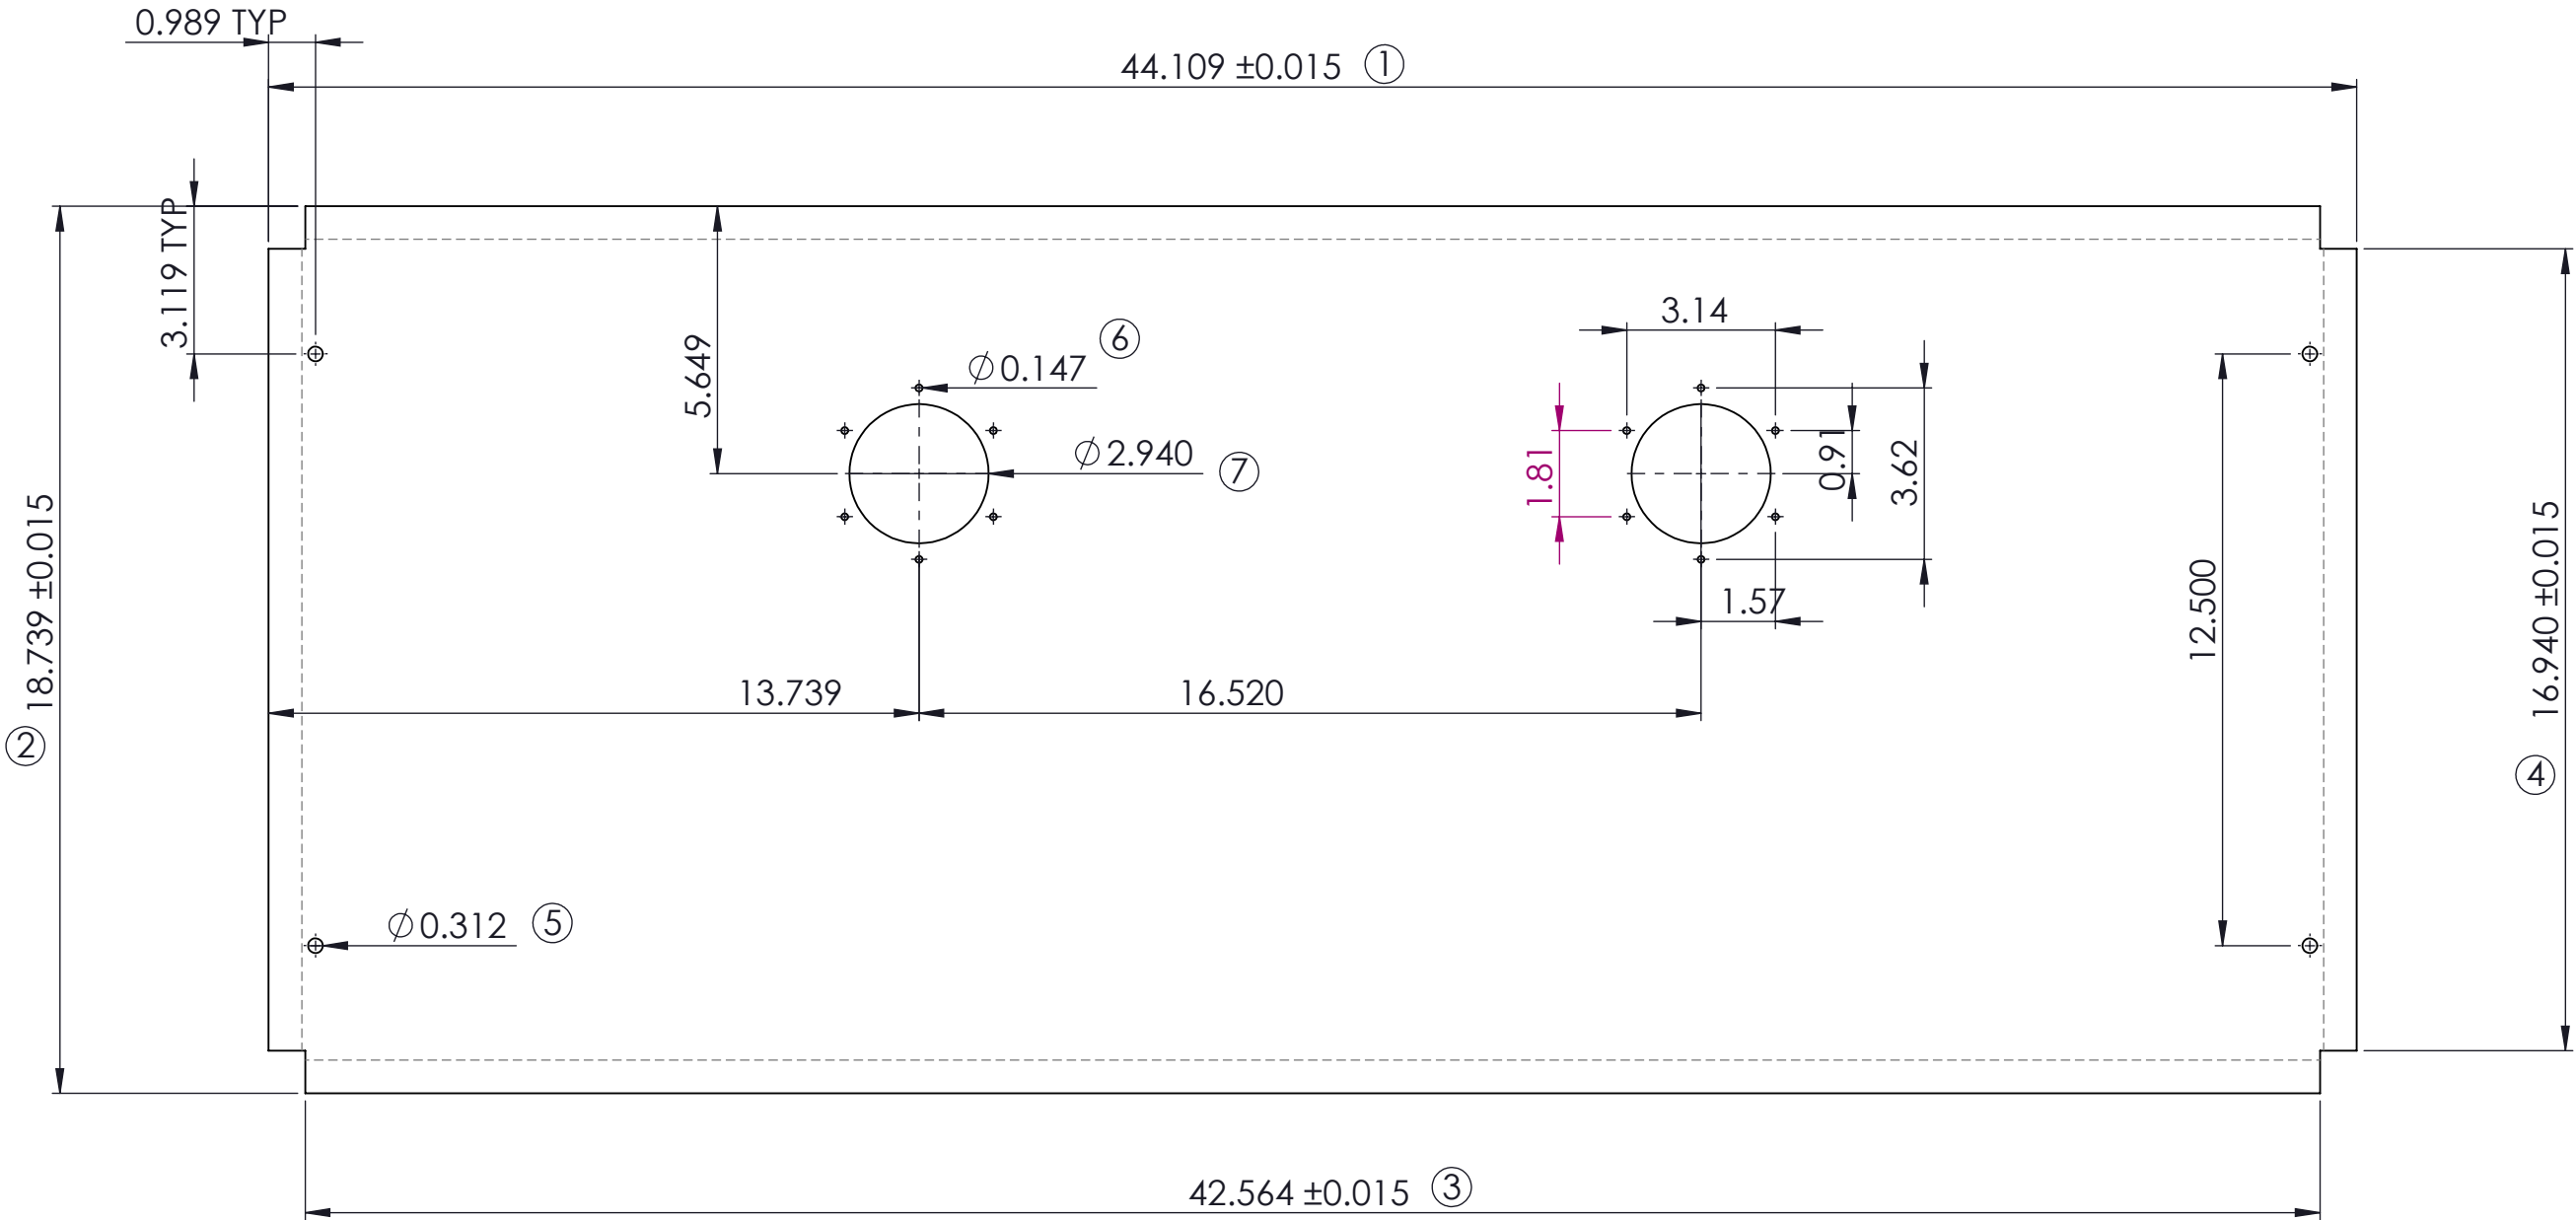

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	5.000	4.985	5.015				
B	0.340	0.325	0.355				
C	13.090	13.075	13.105				
D	16.520	16.505	16.535				
E	12.500	12.485	12.515				
F	2.470	2.455	2.485				
G	0.750	0.735	0.765				
H	17.440	17.425	17.455				
I	0.250	0.235	0.265				
J	42.810	42.795	42.825				
K	0.120	0.105	0.135				
L	3.140	3.125	3.155				
M	3.620	3.605	3.635				
N	1.810	1.795	1.825				
Ñ	1.570	1.555	1.585				
O	0.910	0.895	0.925				
P	1.810	1.795	1.825				

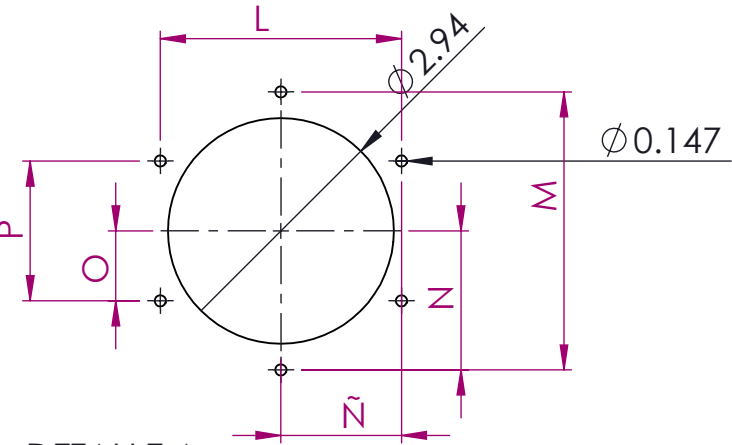

DETALLE A
ESCALA 2 : 5



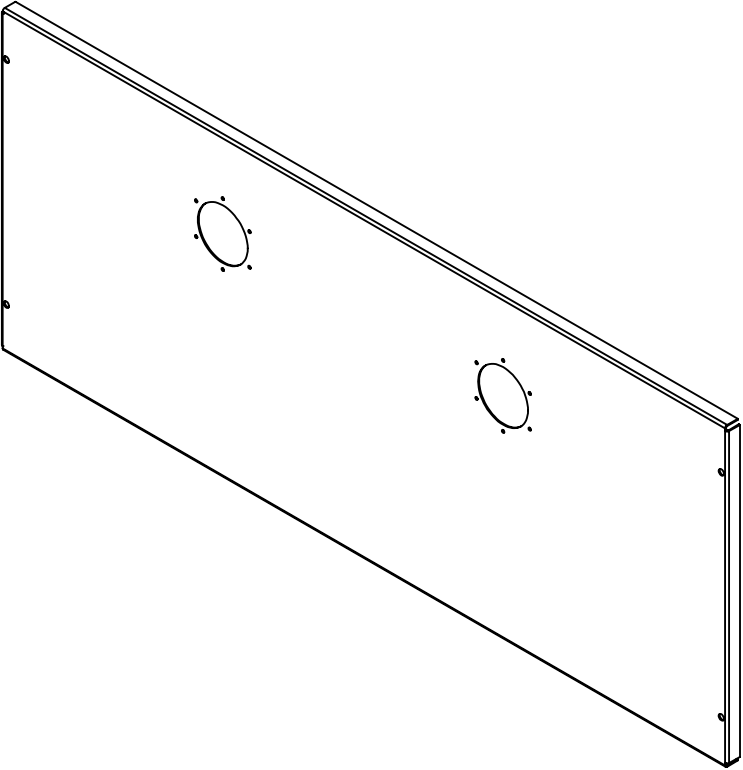


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

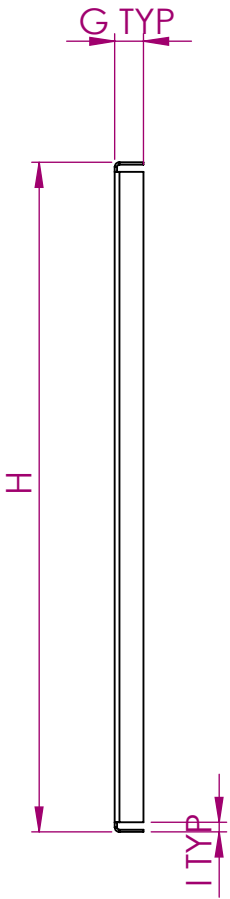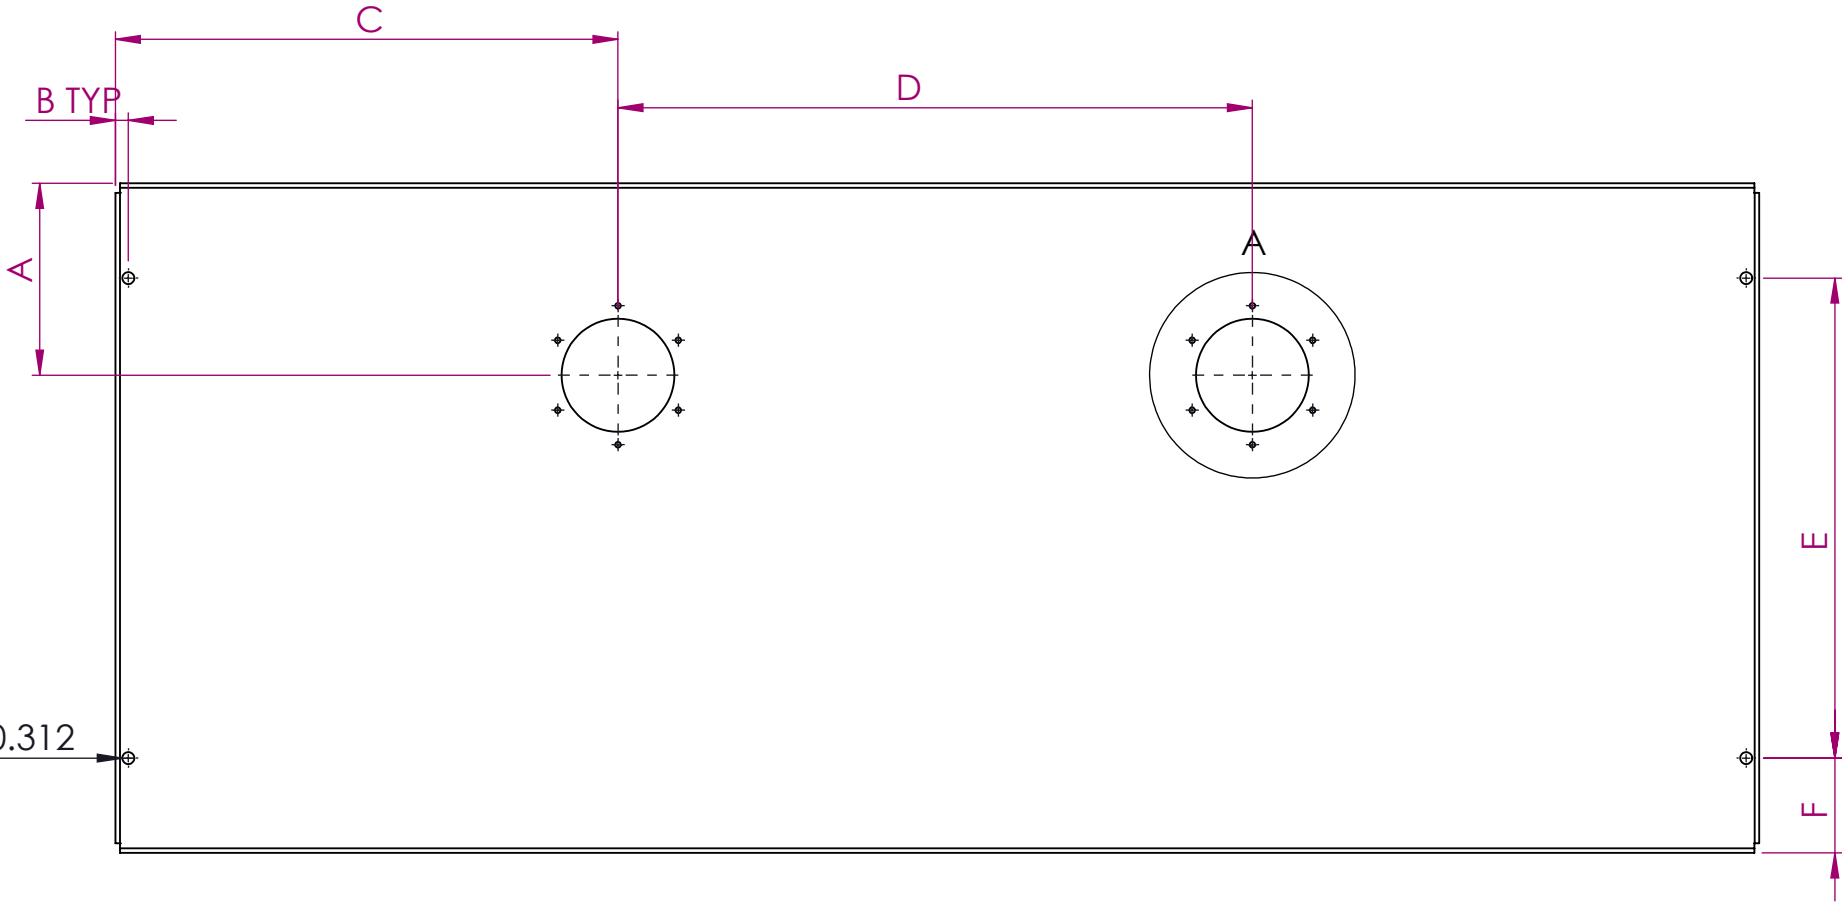

46W X 17.5H COVER W/ 2X IW3000			
Dwn: JRFM	17/07/2026	Chk: JRFM	17/07/2026

Dwn No: P19671-05-(16gacr ANSI-61) - K48 - V0-R0	Rev: 00
Apvd: JRFM	Sht 1 of 1