


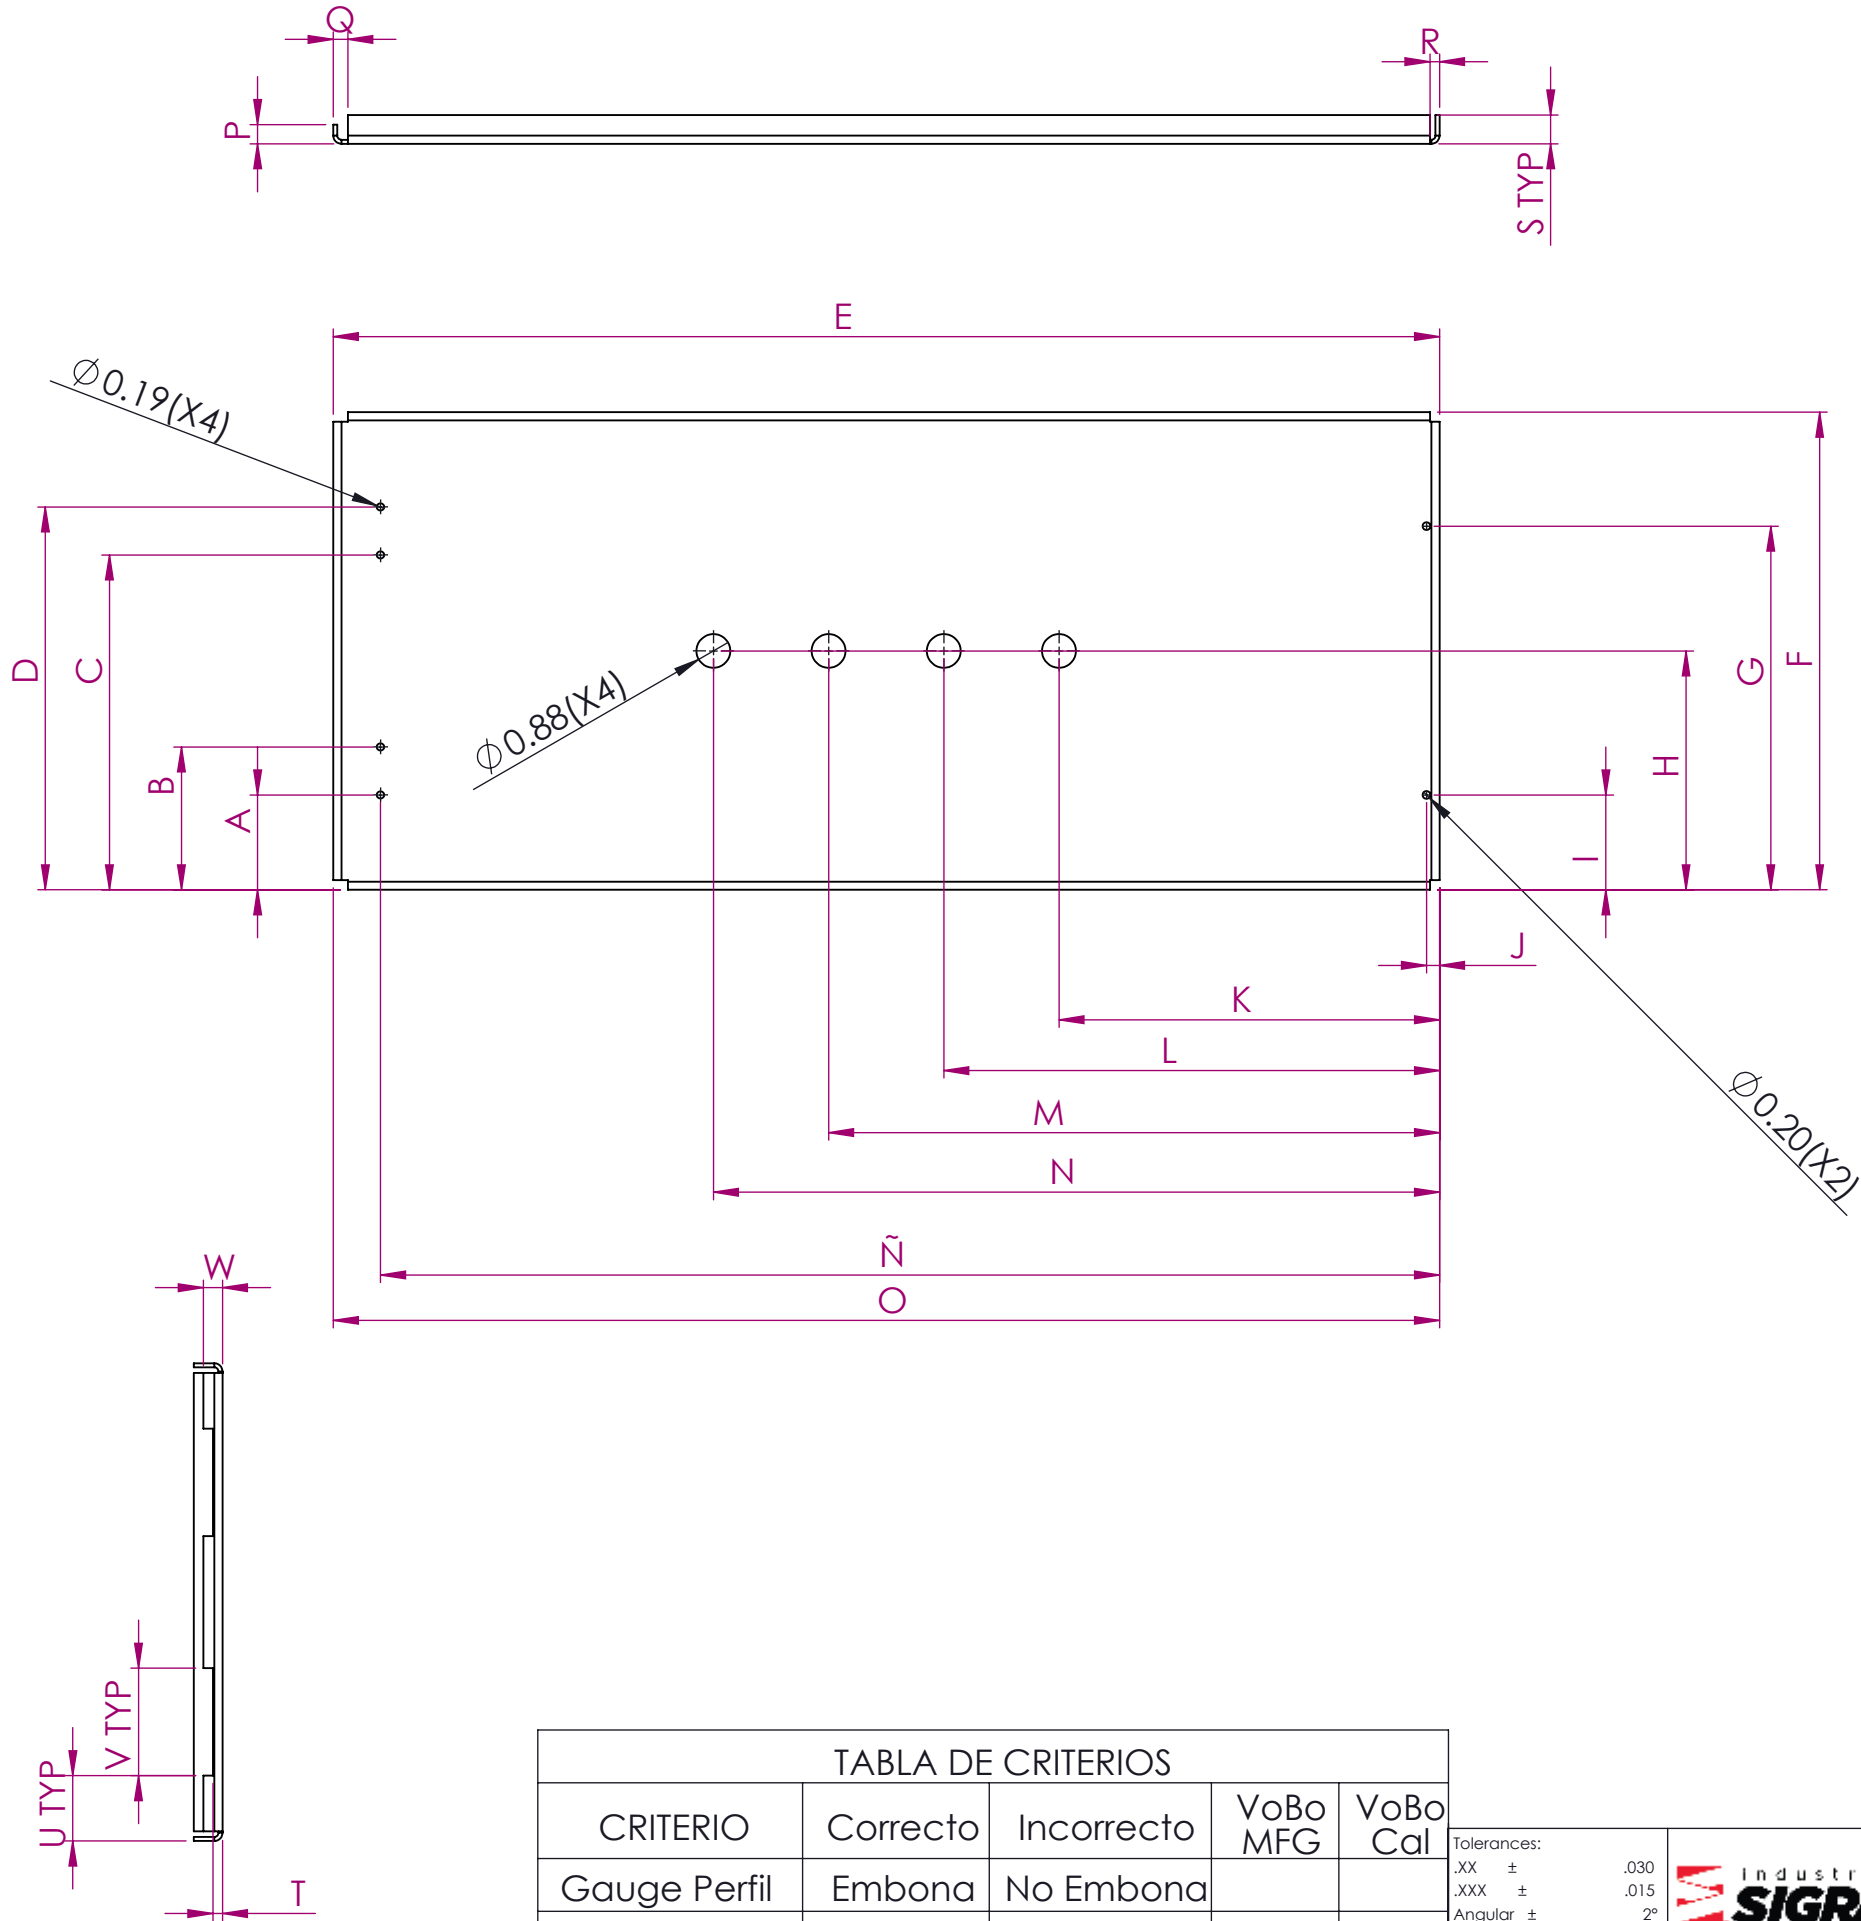

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	2.470	2.455	2.485				
B	3.720	3.705	3.735				
C	8.720	8.705	8.735				
D	9.970	9.955	9.985				
E	28.810	28.795	28.825				
F	12.440	12.425	12.455				
G	9.970	9.955	9.985				
H	6.220	6.205	6.235				
I	2.470	2.455	2.485				
J	0.340	0.325	0.355				
K	6.220	6.205	6.235				
L	12.910	12.895	12.925				
M	15.910	15.895	15.925				
N	18.910	18.895	18.925				
Ñ	27.580	27.565	27.595				
O	28.810	28.795	28.825				
P	0.500	0.485	0.515				
Q	0.380	0.365	0.395				
R	0.250	0.235	0.265				
S	0.750	0.735	0.765				
T	0.230	0.215	0.245				
U	1.700	1.685	1.715				
V	2.800	2.785	2.815				
W	0.500	0.485	0.515				

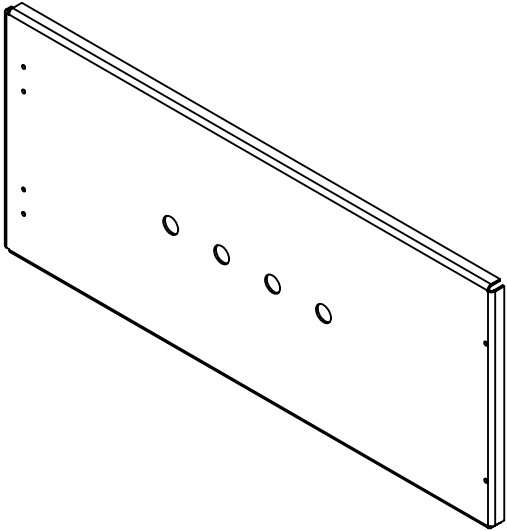


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm	-		

Tolerances:
.XX $\pm$.030
.XXX $\pm$.015
Angular $\pm$ 2°
Units are in inches




32W12.5H DOOR				Dwn No: P20255-02-(12gacr ANSI-61) - K48 - V1-R0		Rev: 00
Dwn: AWV	28/04/2026	Chk: AWV	28/04/2026	Apvd: AWV	28/04/2026	Sht 1 of 1

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	13.585	13.570	13.600				
2	LASER	11.940	11.925	11.955				
3	LASER	28.180	28.165	28.195				
4	LASER	29.705	29.690	29.720				
5	LASER	0.880	0.865	0.895				
6	LASER	0.190	0.175	0.205				
7	LASER	0.200	0.185	0.215				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	P20255-02-(12gacr ANSI-61) - K48 - V1-R0	28/04/26	0.48	13.653	29.773	0.105
R1						
R2						
R3						

CORTE

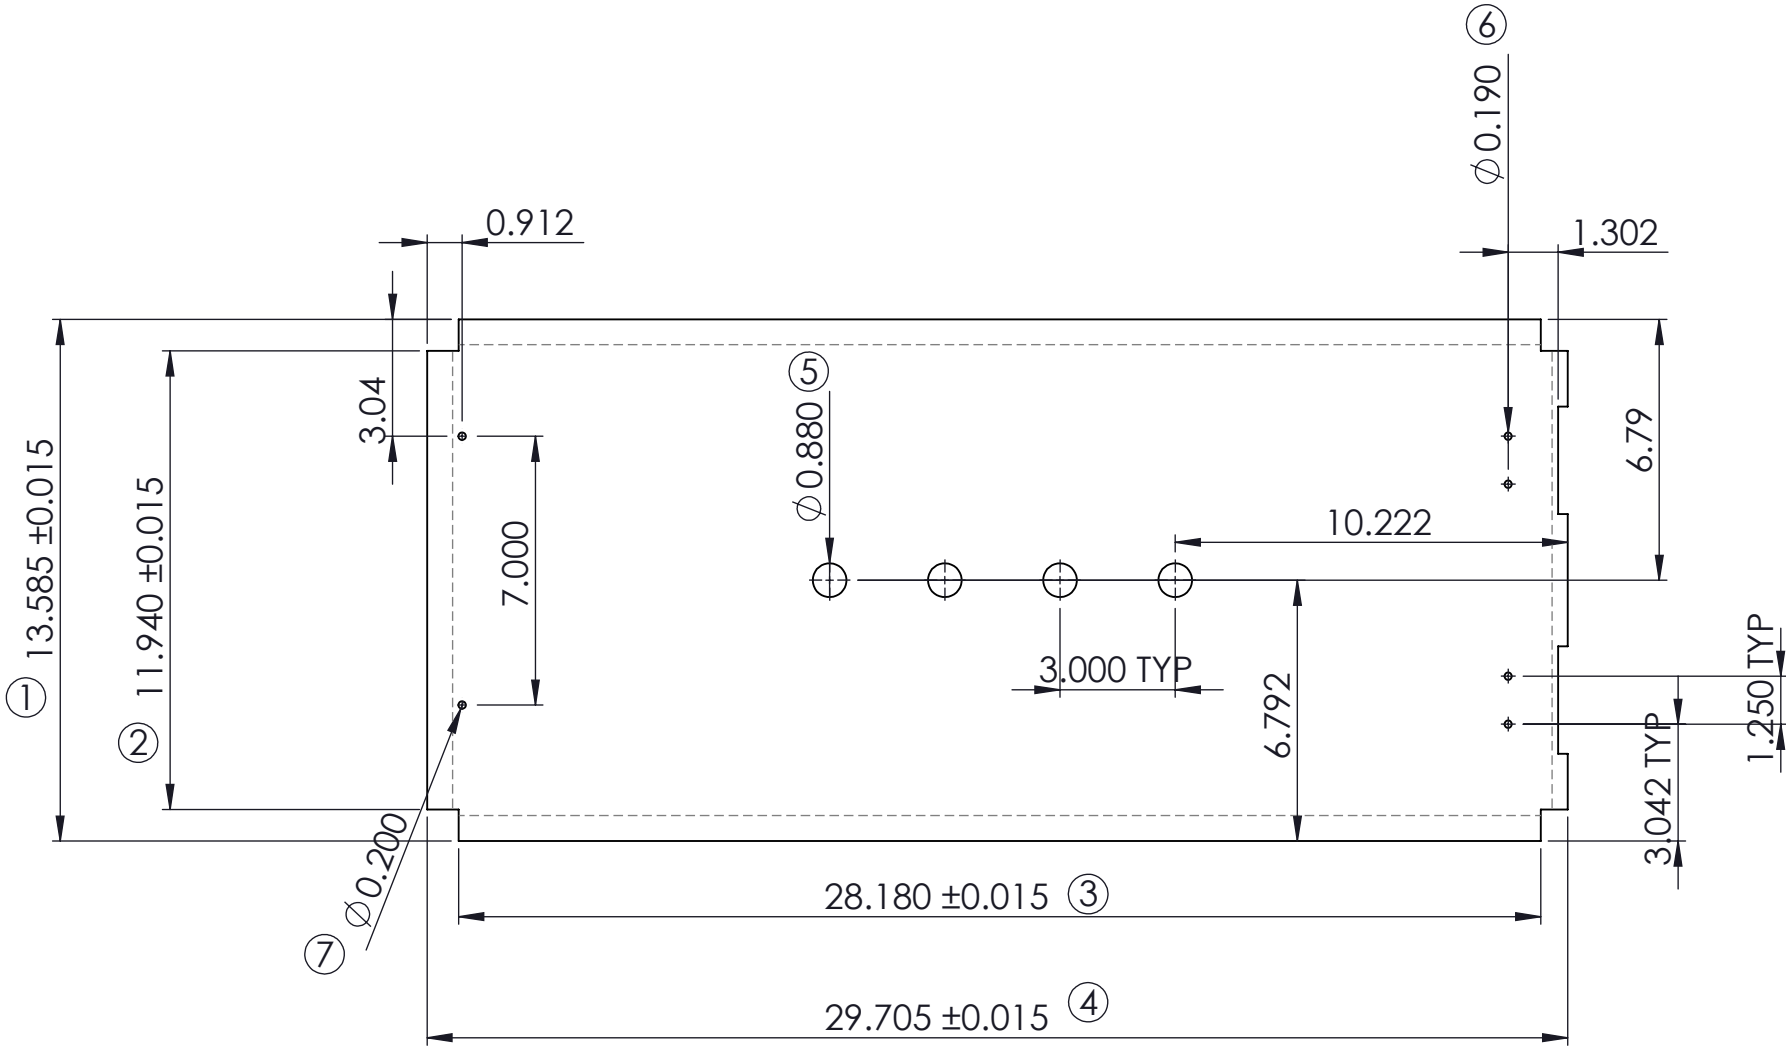

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches		32W12.5H DOOR				Dwn No: P20255-02-(12gacr ANSI-61) - K48 - V1-R0			Rev: 00
		Dwn: AWV	28/04/2026	Chk: AWV	28/04/2026	Apvd: AWV	28/04/2026	Sht 1 of 1	