


No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	35.792	35.777	35.807				
2	LASER	21.172	21.157	21.187				
3	LASER	34.310	34.295	34.325				
4	LASER	19.440	19.425	19.455				
5	LASER	0.312	0.297	0.327				
6	LASER	0.190	0.175	0.205				
7	LASER	0.218	0.203	0.233				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	P20321S-08-01-(14gacr ANSI-61) - K48 - V1-R0	17/07/2026	0.48	21.172	35.792	0.075



Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

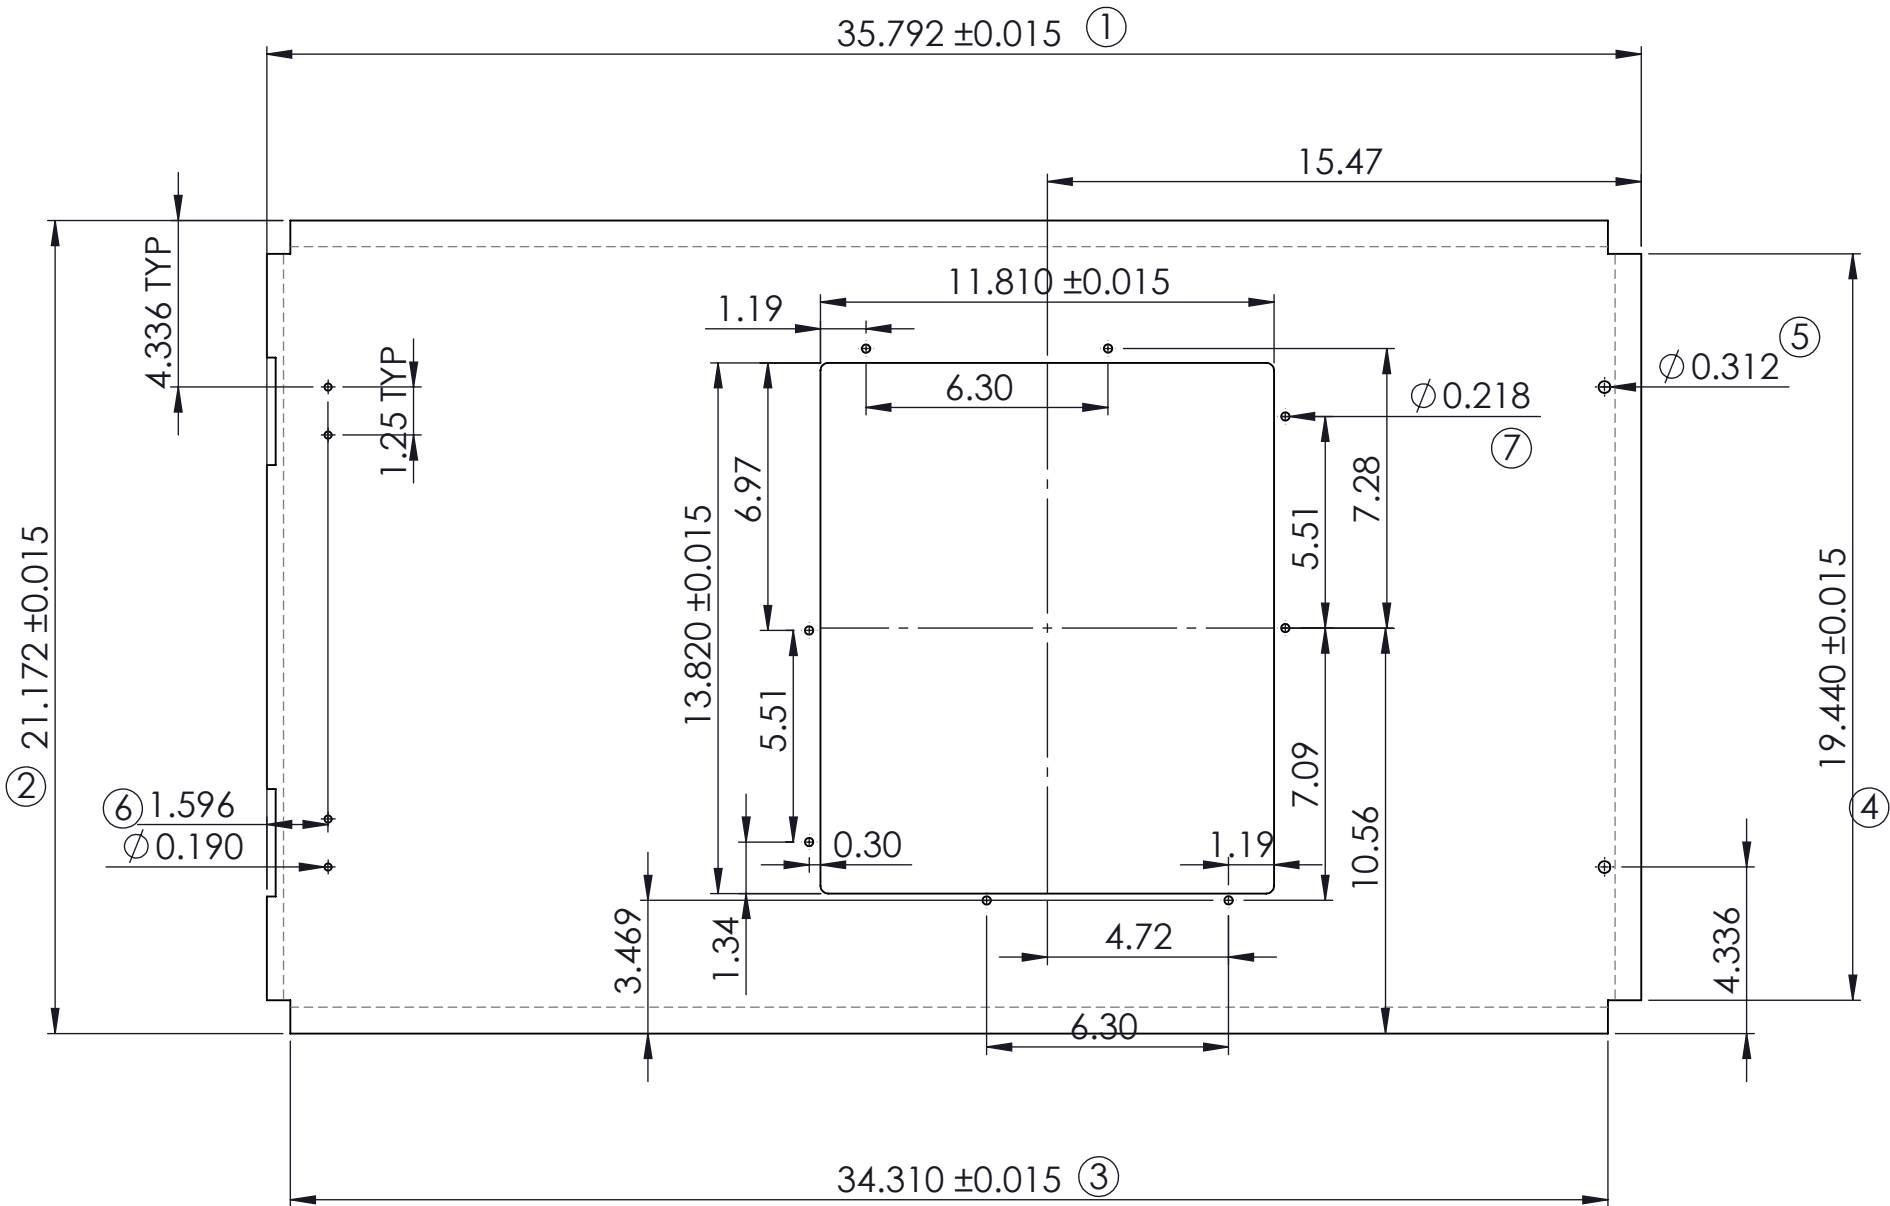

WDO BREAKER DOOR

Dwn: JRFM

17/07/2026

Chk: JRFM

17/07/2026


Dwn No: P20321S-08-01-(14gacr ANSI-61) - K48 - V1-R0

Rev: 00

Apvd: JRFM

17/07/2026

Sht 1 of 1

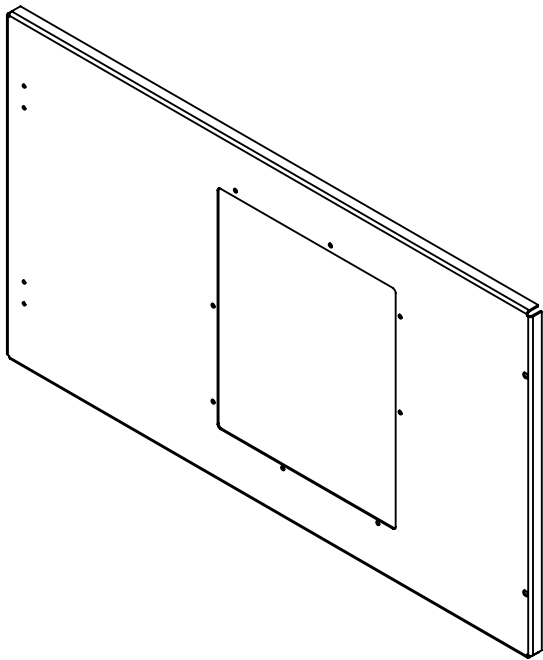

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	3.720	3.705	3.735				
B	1.250	1.235	1.265				
C	1.250	1.235	1.265				
D	3.720	3.705	3.735				
E	1.230	1.215	1.245				
F	14.850	14.835	14.865				
G	3.720	3.705	3.735				
H	9.940	9.925	9.955				
I	3.720	3.705	3.735				
J	19.940	19.925	19.955				
K	0.250	0.235	0.265				
L	2.950	2.935	2.965				
M	2.800	2.785	2.815				
N	0.230	0.215	0.245				
Ñ	34.810	34.795	34.825				
O	0.500	0.485	0.515				
P	0.250	0.235	0.265				
Q	0.750	0.735	0.765				

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:

.XX	±	.030
.XXX	±	.015
Angular	±	2°

Units are in inches



WLDO BREAKER DOOR

Dwn No:
P20321S-08-01-(14gacr ANSI-61) - K48 - V1-R0

Dwn: JRFM	17/07/2026	Chk: JRFM	17/07/2026	Apvd: JRFM	17/07/2026	Sht 1 of 1
-----------	------------	-----------	------------	------------	------------	------------