


No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	43.708	43.693	43.723				
2	LASER	16.088	16.073	16.103				
3	LASER	42.180	42.165	42.195				
4	LASER	14.440	14.425	14.455				
5	LASER	7.360	7.345	7.375				
6	LASER	5.470	5.455	5.485				
7	LASER	5.380	5.365	5.395				
8	LASER	2.320	2.305	2.335				
9	LASER	4.300	4.285	4.315				
10	LASER	3.600	3.585	3.615				
11	LASER	0.200	0.185	0.215				
12	LASER	0.380	0.365	0.395				
13	LASER	0.880	0.865	0.895				
14	LASER	0.190	0.175	0.205				



REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	P20325-23-(12gacr ANSI-61) - K48 - V2-R0	21/07/2026	0.48	16.088	43.708	0.105



Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

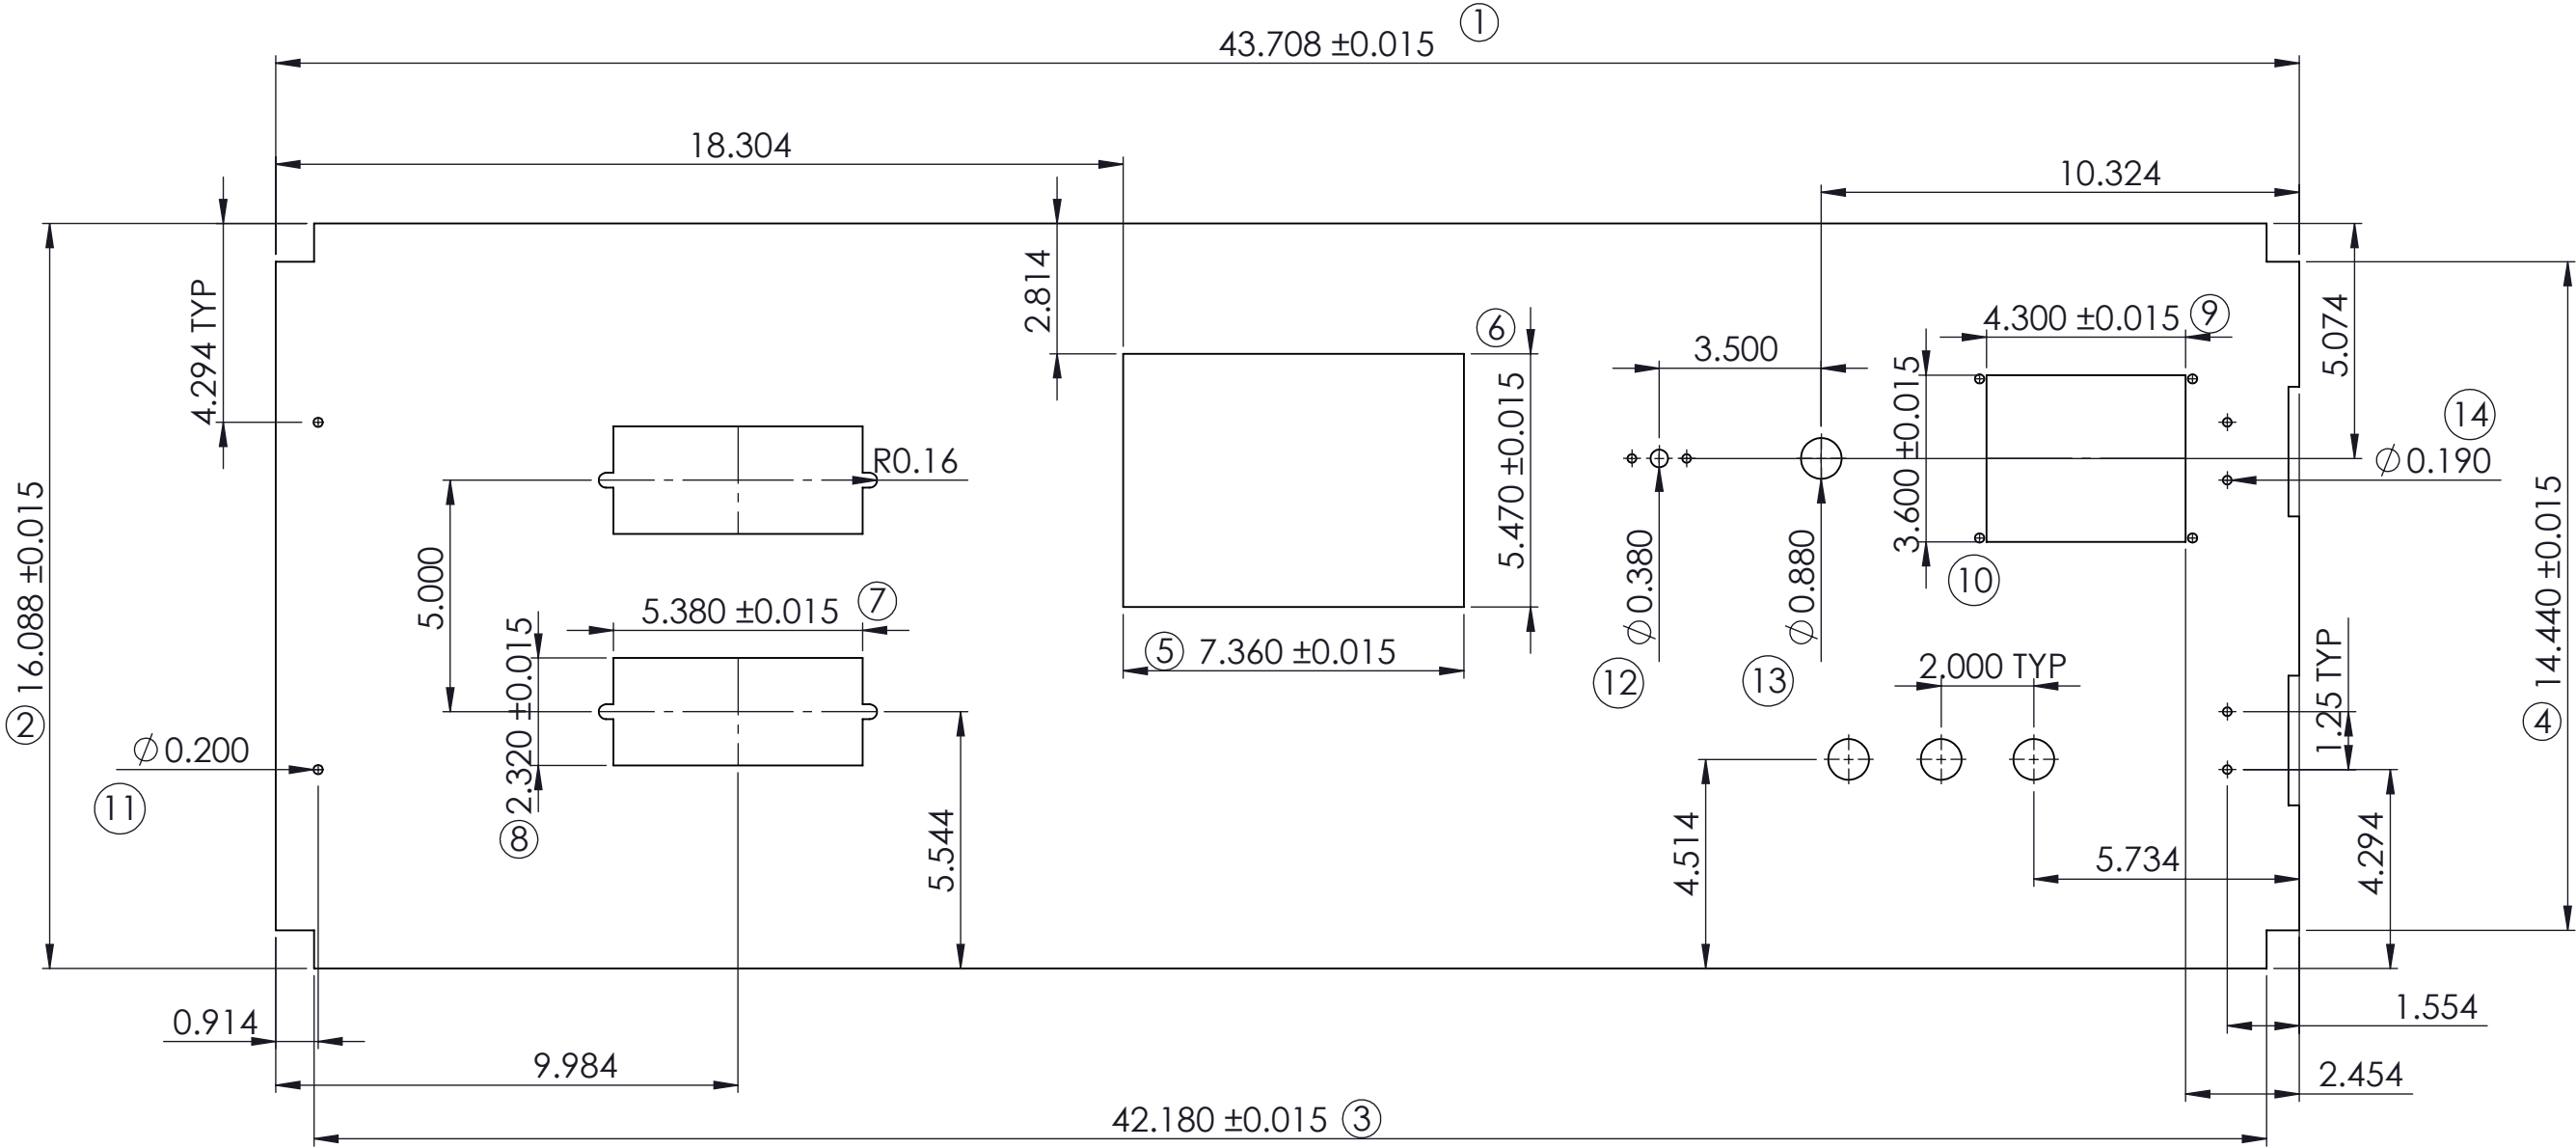

46W X 15H MTR DOOR W/				Dwn No: P20325-23-(12gacr ANSI-61) - K48 - V2-R0		Rev: 00	
Dwn: JRFM	21/07/2026	Chk: JRFM	21/07/2027	Apvd: JRFM	21/07/2026	Sht 1 of 1	

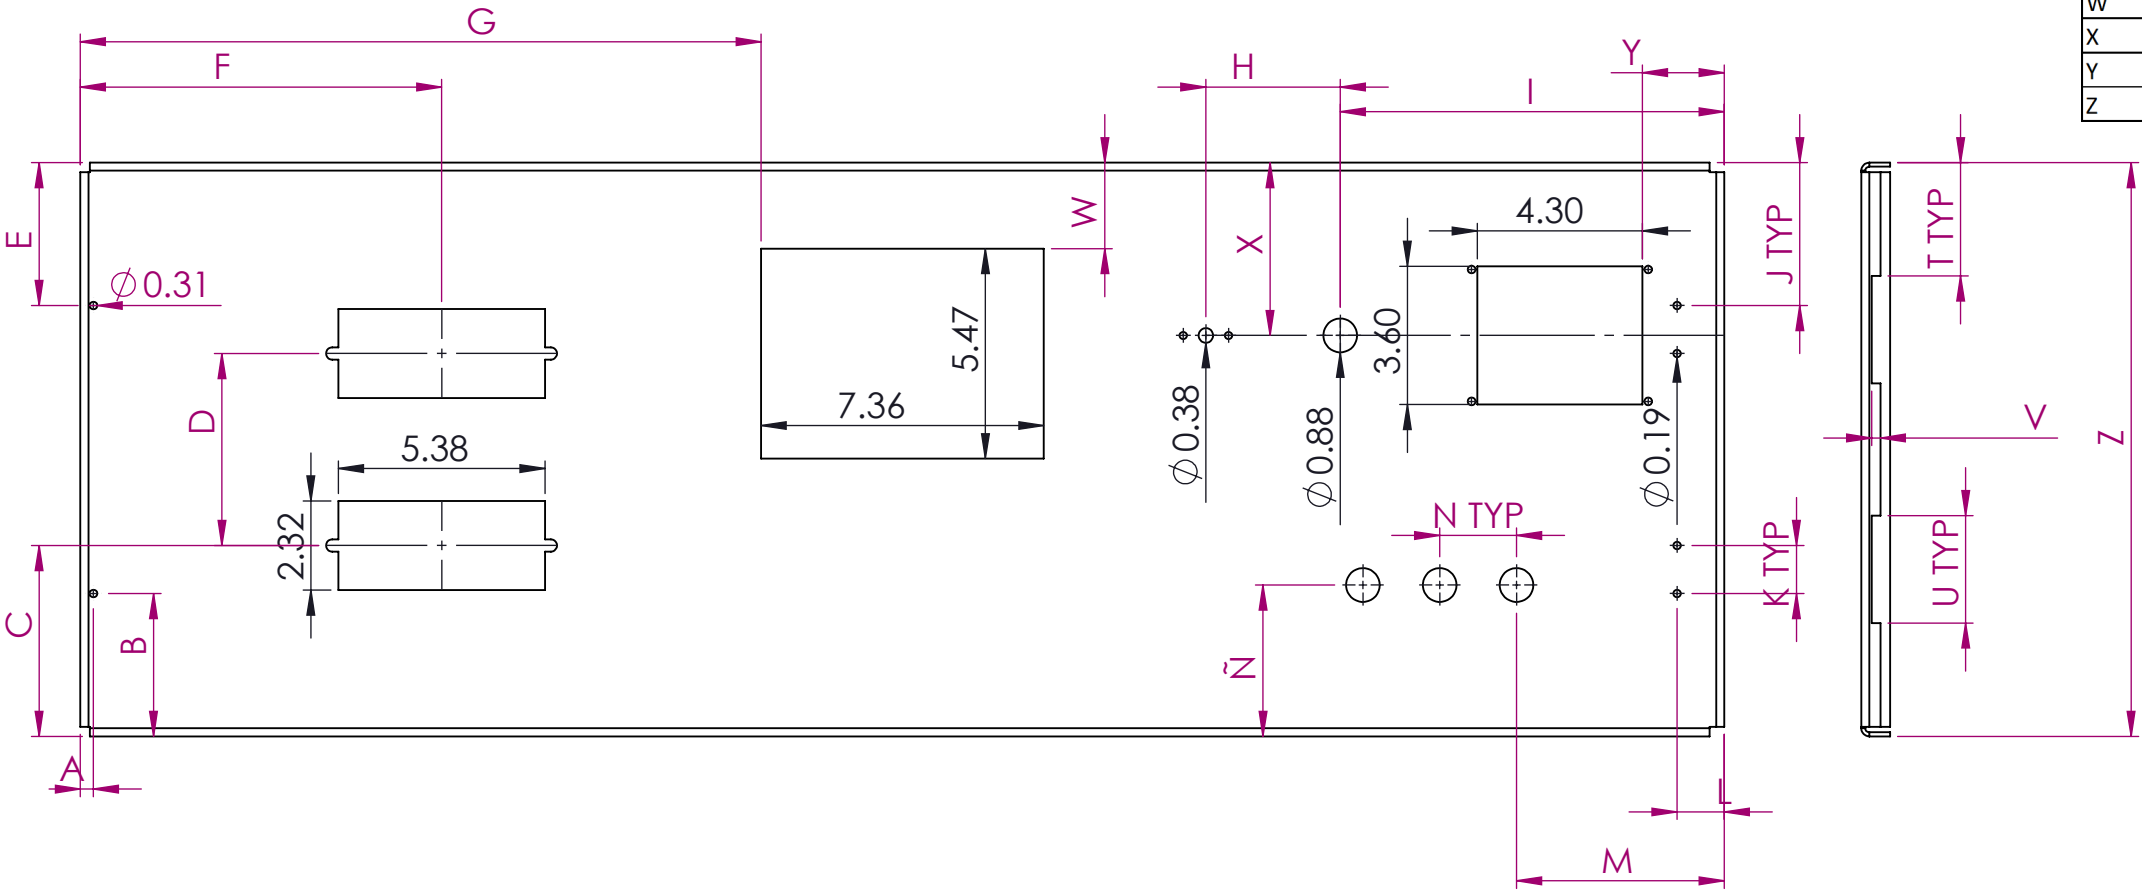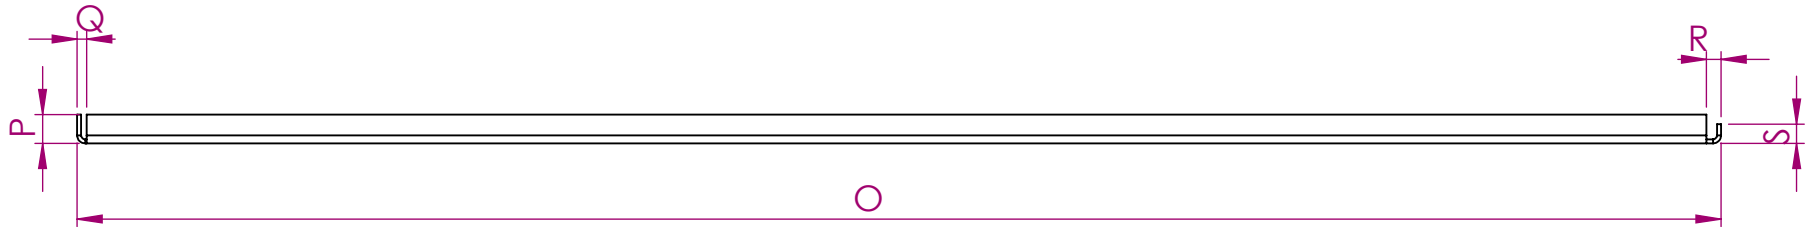

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.340	0.325	0.355				
B	3.720	3.705	3.735				
C	4.970	4.955	4.985				
D	5.000	4.985	5.015				
E	3.720	3.705	3.735				
F	9.410	9.395	9.425				
G	17.730	17.715	17.745				
H	3.500	3.485	3.515				
I	10.000	9.985	10.015				
J	3.720	3.705	3.735				
K	1.250	1.235	1.265				
L	1.230	1.215	1.245				
M	5.410	5.395	5.425				
N	2.000	1.985	2.015				
Ñ	3.940	3.925	3.955				
O	42.810	42.795	42.825				
P	0.750	0.735	0.765				
Q	0.250	0.235	0.265				
R	0.380	0.365	0.395				
S	0.500	0.485	0.515				
T	2.950	2.935	2.965				
U	2.800	2.785	2.815				
V	0.230	0.215	0.245				
W	2.240	2.225	2.255				
X	4.500	4.485	4.515				
Y	2.130	2.115	2.145				
Z	14.940	14.925	14.955				

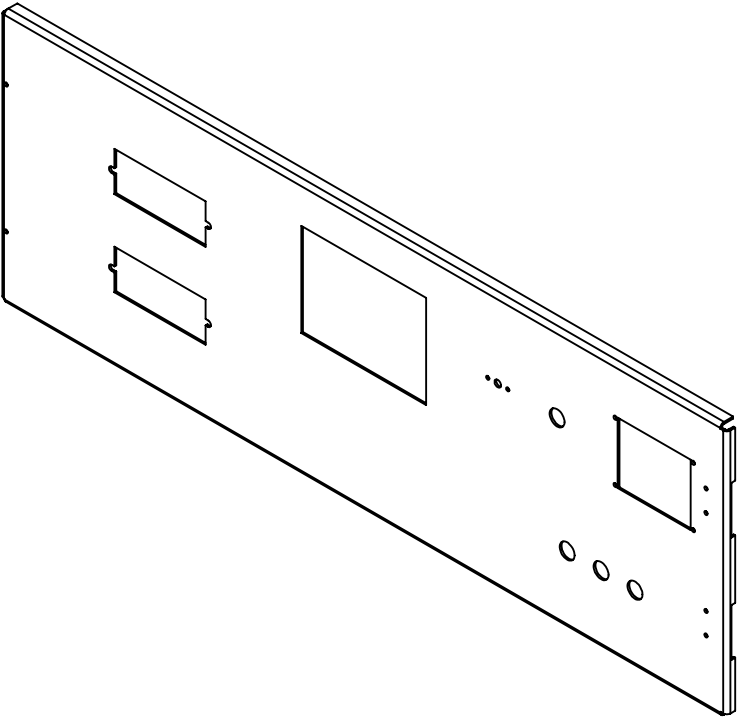


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	16 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



46W X 15H MTR DOOR W/				Dwn No: P20325-23-(12gacr ANSI-61) - K48 - V2-R0		Rev: 00
Dwn: JRFM	21/07/2026	Chk: JRFM	21/07/2026	Apvd: JRFM	21/07/2026	Sht 1 of 1