


DOBLEZ

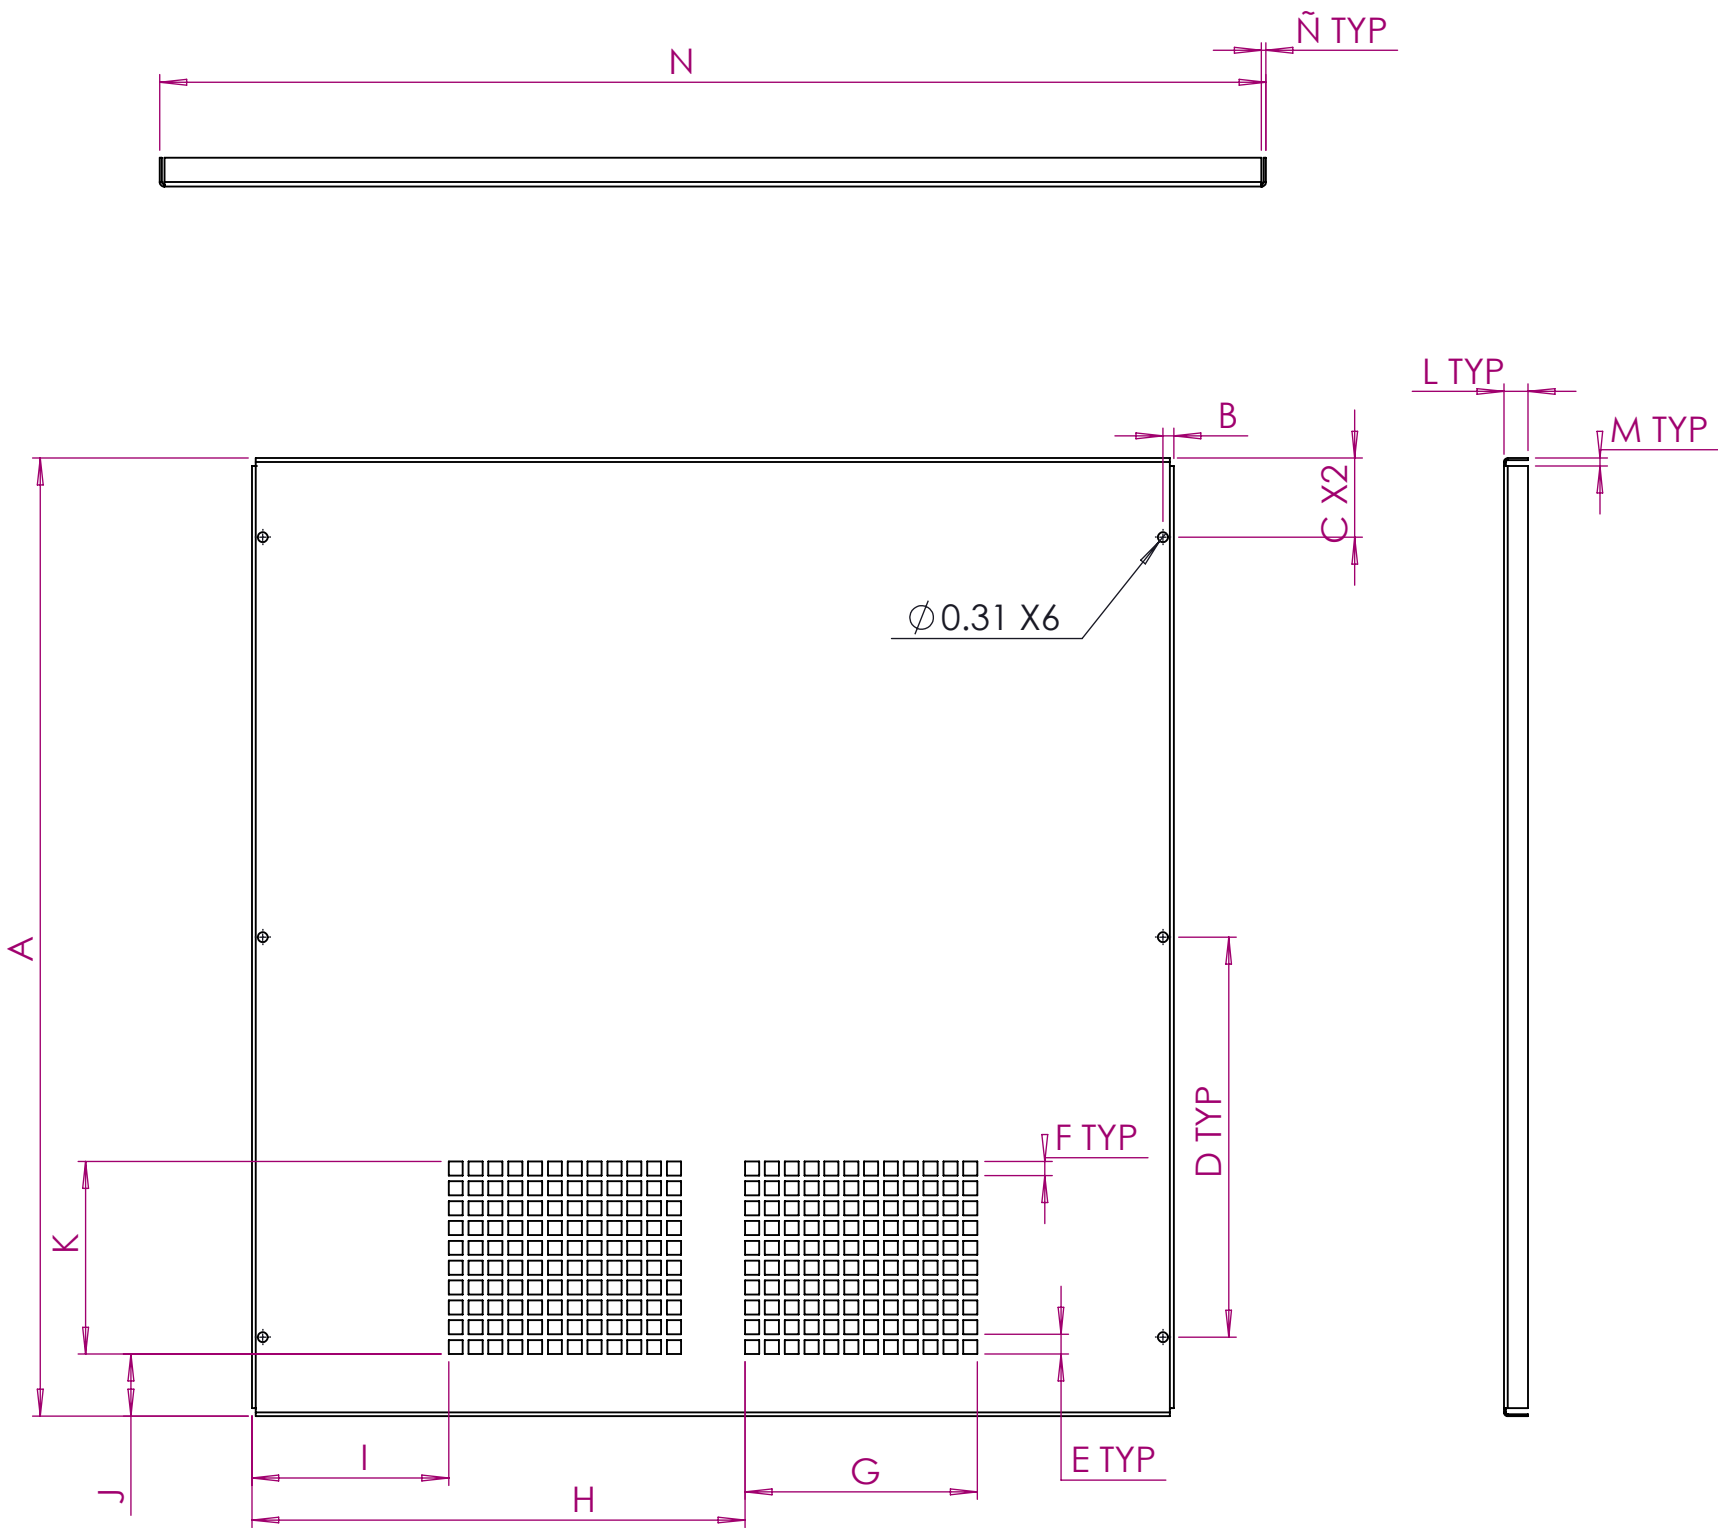

MEDIDA	MEDICION	LIM. I	LIM. S	VALOR MFG	VALOR VoBo	VALOR CAL	VALOR VoBo
A	29.940	29.925	29.955				
B	0.340	0.325	0.355				
C	2.470	2.455	2.485				
D	12.500	12.485	12.515				
E	0.620	0.605	0.635				
F	0.440	0.425	0.455				
G	7.260	7.245	7.275				
H	15.410	15.395	15.425				
I	6.150	6.135	6.165				
J	1.940	1.925	1.955				
K	6.020	6.005	6.035				
L	0.750	0.735	0.765				
M	0.250	0.235	0.265				
N	28.810	28.795	28.825				
Ñ	0.120	0.105	0.135				

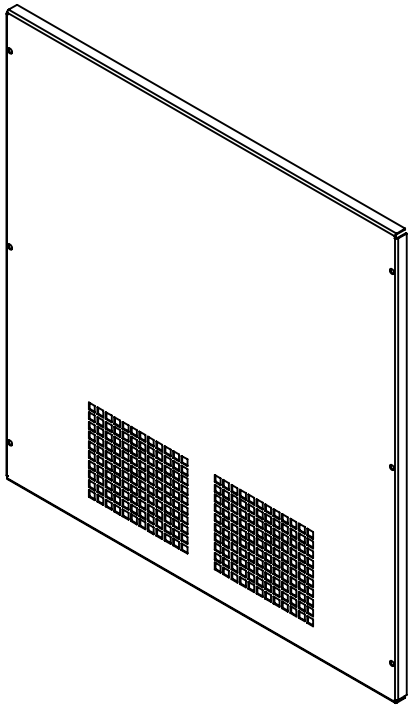


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches




30H VENT COVER			
Dwn: AWV	03/03/2026	Chk: AWV	03/03/2026

Dwn No: P6298-51-(16gacr ANSI-61) - K48 - V1-R0	Rev: 00
Apvd: AWV	03/03/2026
Sht 1 of 1	

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	30.109	30.094	30.124				
2	LASER	28.564	28.549	28.579				
3	LASER	31.239	31.224	31.254				
4	LASER	29.440	29.425	31.254				
5	LASER	0.310	0.295	0.325				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	P6298-51-(16gacr ANSI-61) - K48 - V1-R0	03/03/26	0.48	30.109	31.239	0.060
R1						
R2						
R3						

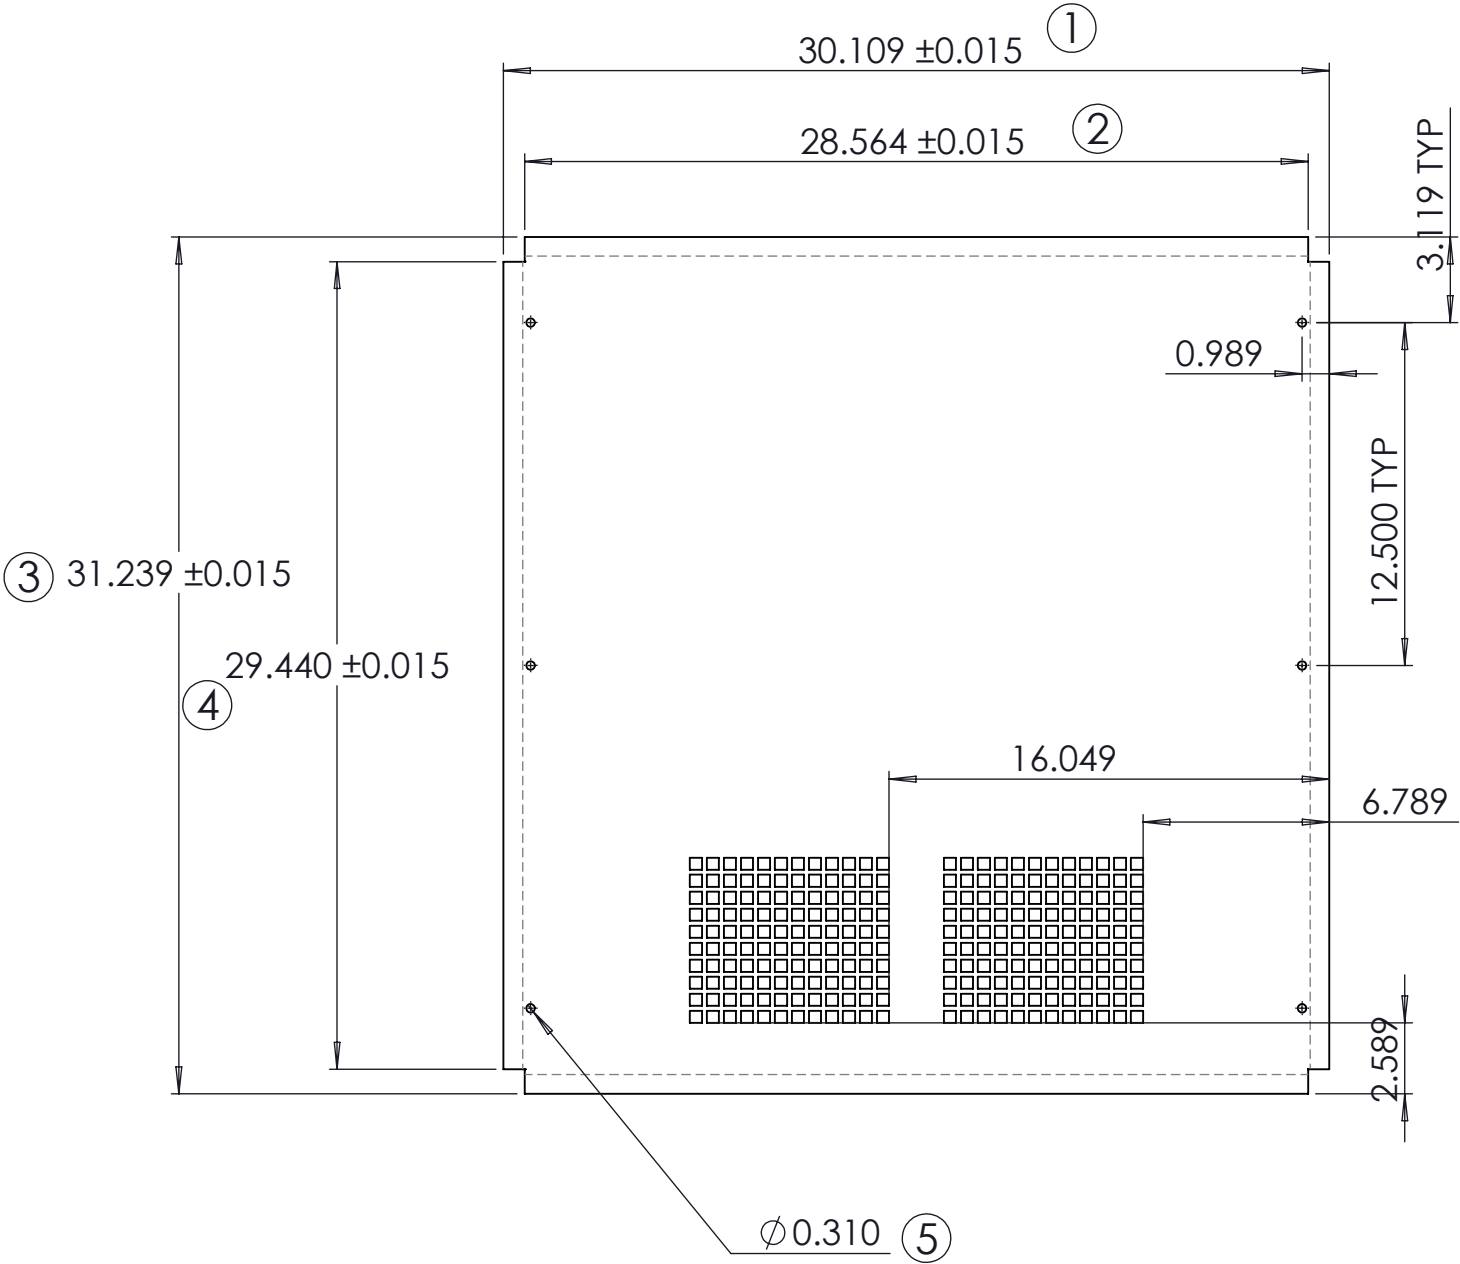

OC: