







DOBLEZ

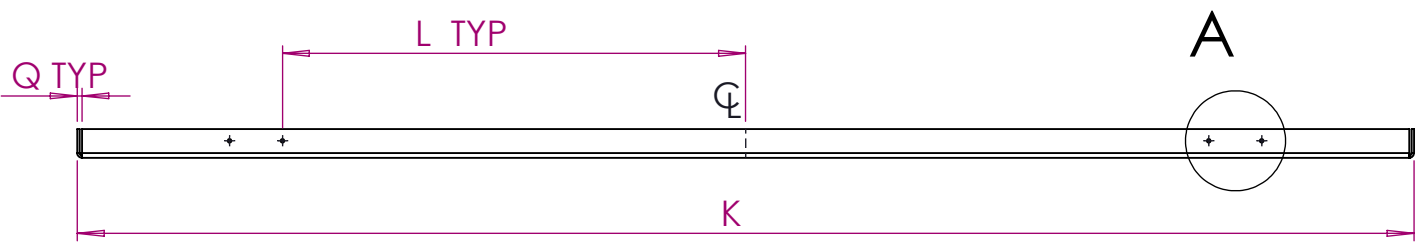


DETALLE A
ESCALA 2 : 5



DETALLE C

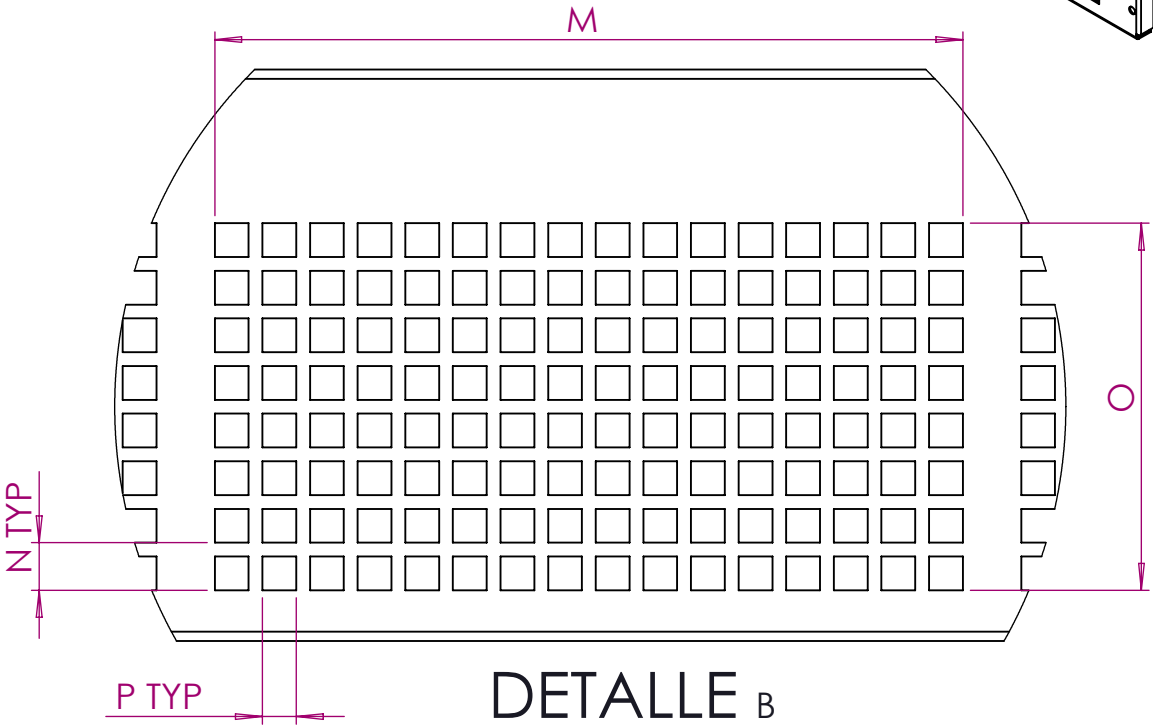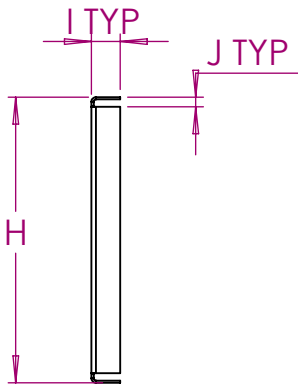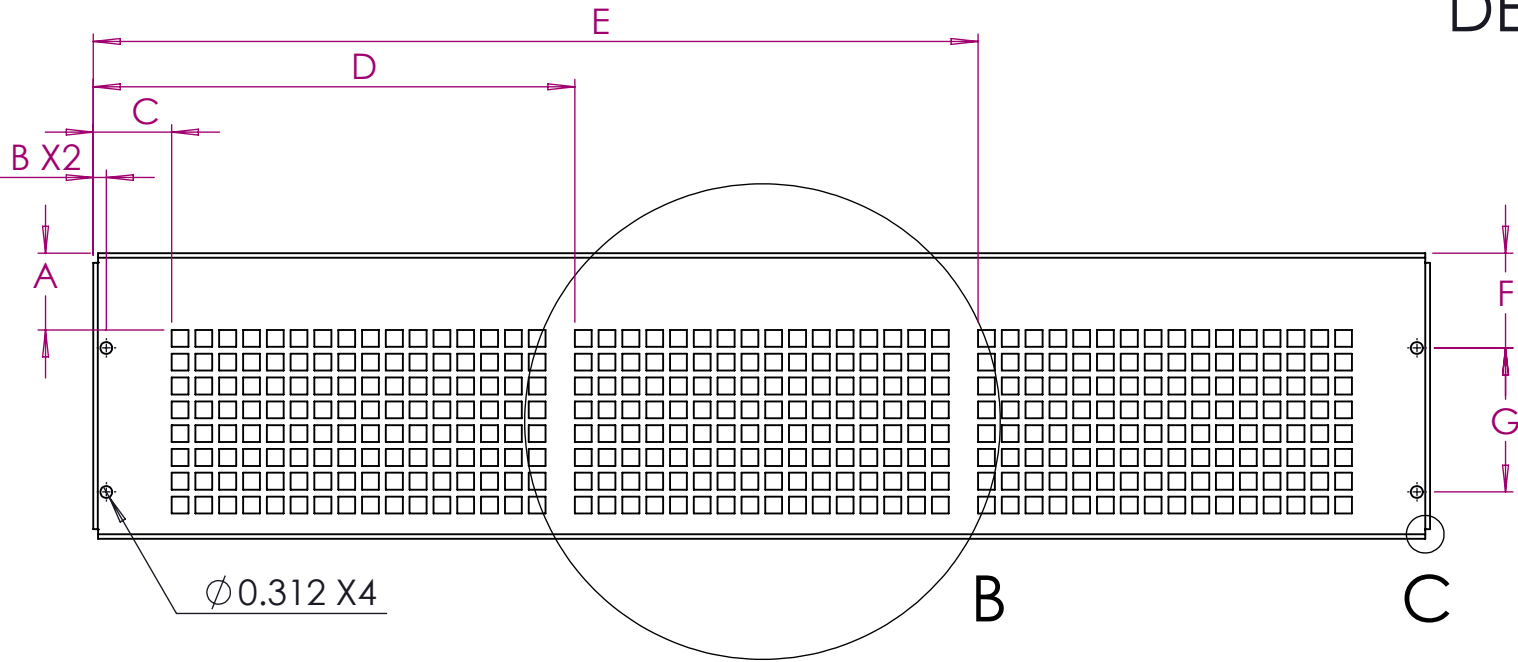

DETALLE B

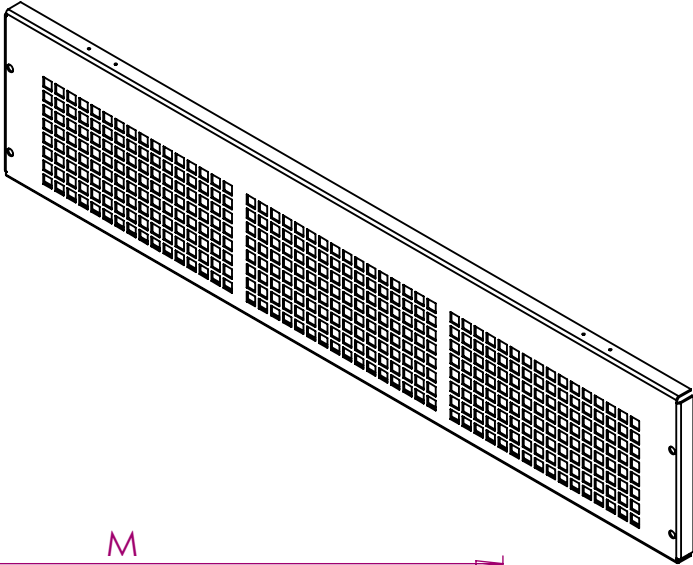

MEDIDA	DIMENSION	LIM. I	LIM. S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	2.000	1.985	2.015				
B	0.340	0.325	0.355				
C	2.040	2.025	2.055				
D	12.540	12.525	12.555				
E	23.040	23.025	23.055				
F	2.470	2.455	2.485				
G	3.750	3.735	3.765				
H	7.440	7.425	7.455				
I	0.750	0.735	0.765				
J	0.250	0.235	0.265				
K	34.810	34.795	34.825				
L	12.06	12.045	12.075				
M	9.740	9.732	9.755				
N	0.620	0.605	0.635				
O	4.780	4.765	4.795				
P	0.440	0.425	0.455				
Q	0.120	0.105	0.135				

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			


Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



7.5 VENT COVER				Dwn No: PP1510-02-(16gacr ANSI-61) - K48 - V5-R0		Rev: 00
Dwn: AWV	02/03/2026	Chk: AWV	02/03/2026	Apvd: AWV	02/03/2026	Sht 1 of 1

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	8.739	8.724	8.754				
2	LASER	6.940	6.925	6.955				
3	LASER	36.109	36.094	36.124				
4	LASER	34.564	34.549	34.579				
5	LASER	0.310	0.295	0.325				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	PP1510-02-(16gacr ANSI-61) - K48 - V5-R0	02/03/26	0.48	8.739	36.109	0.060
R1						
R2						
R3						

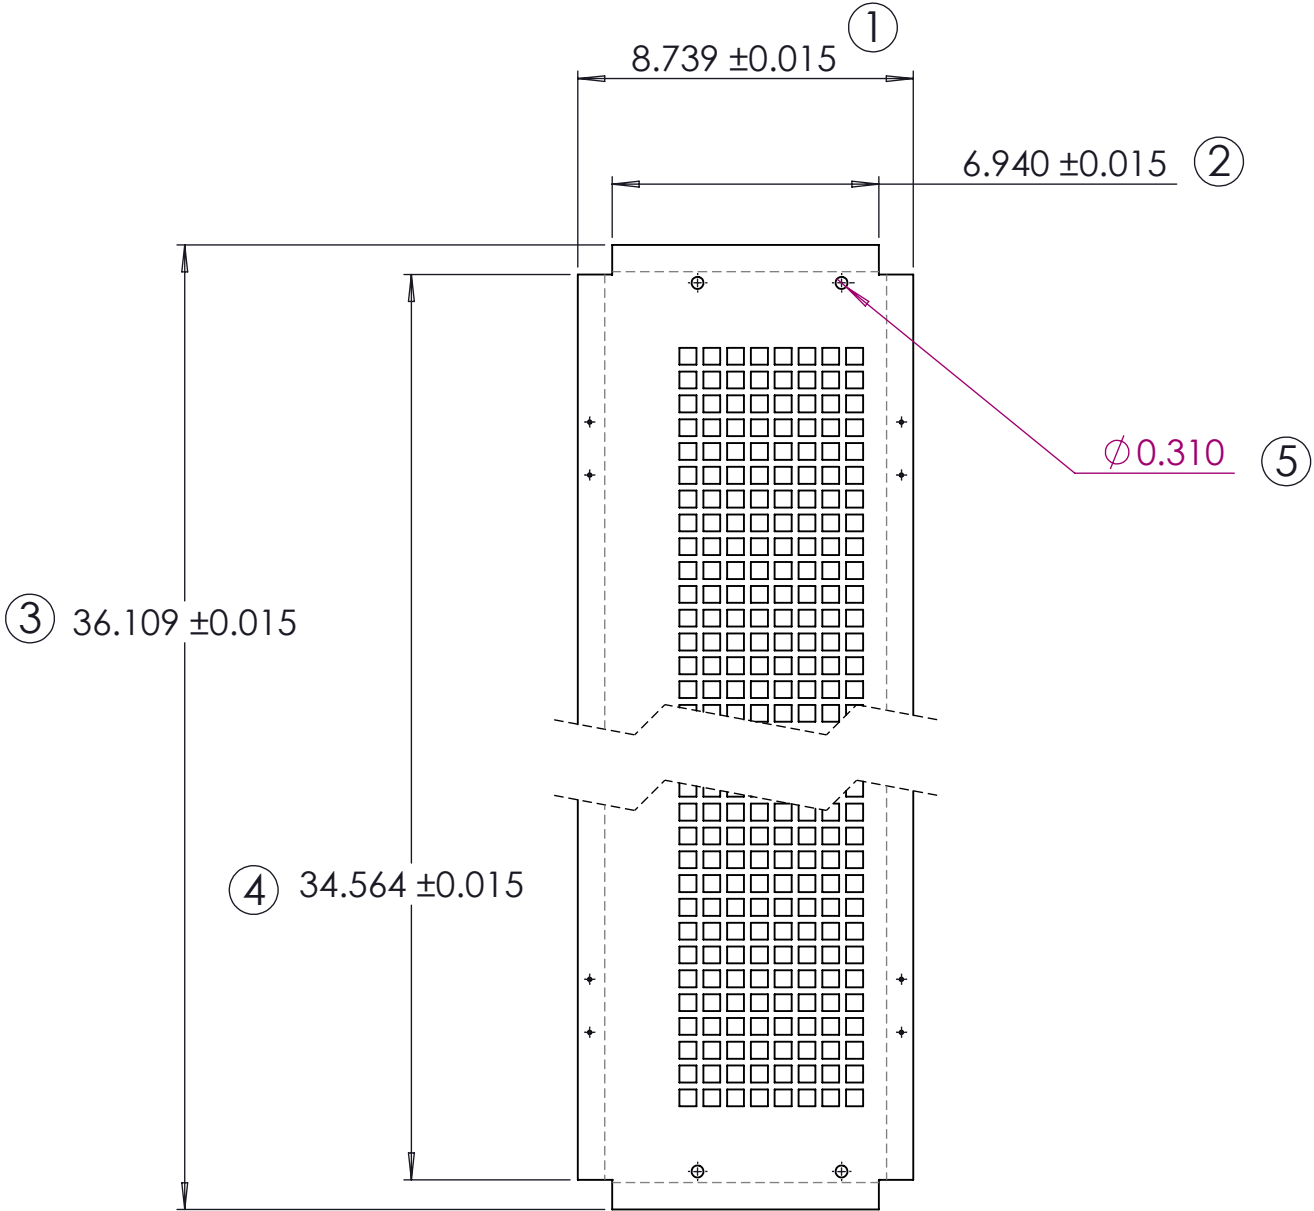

OC: