

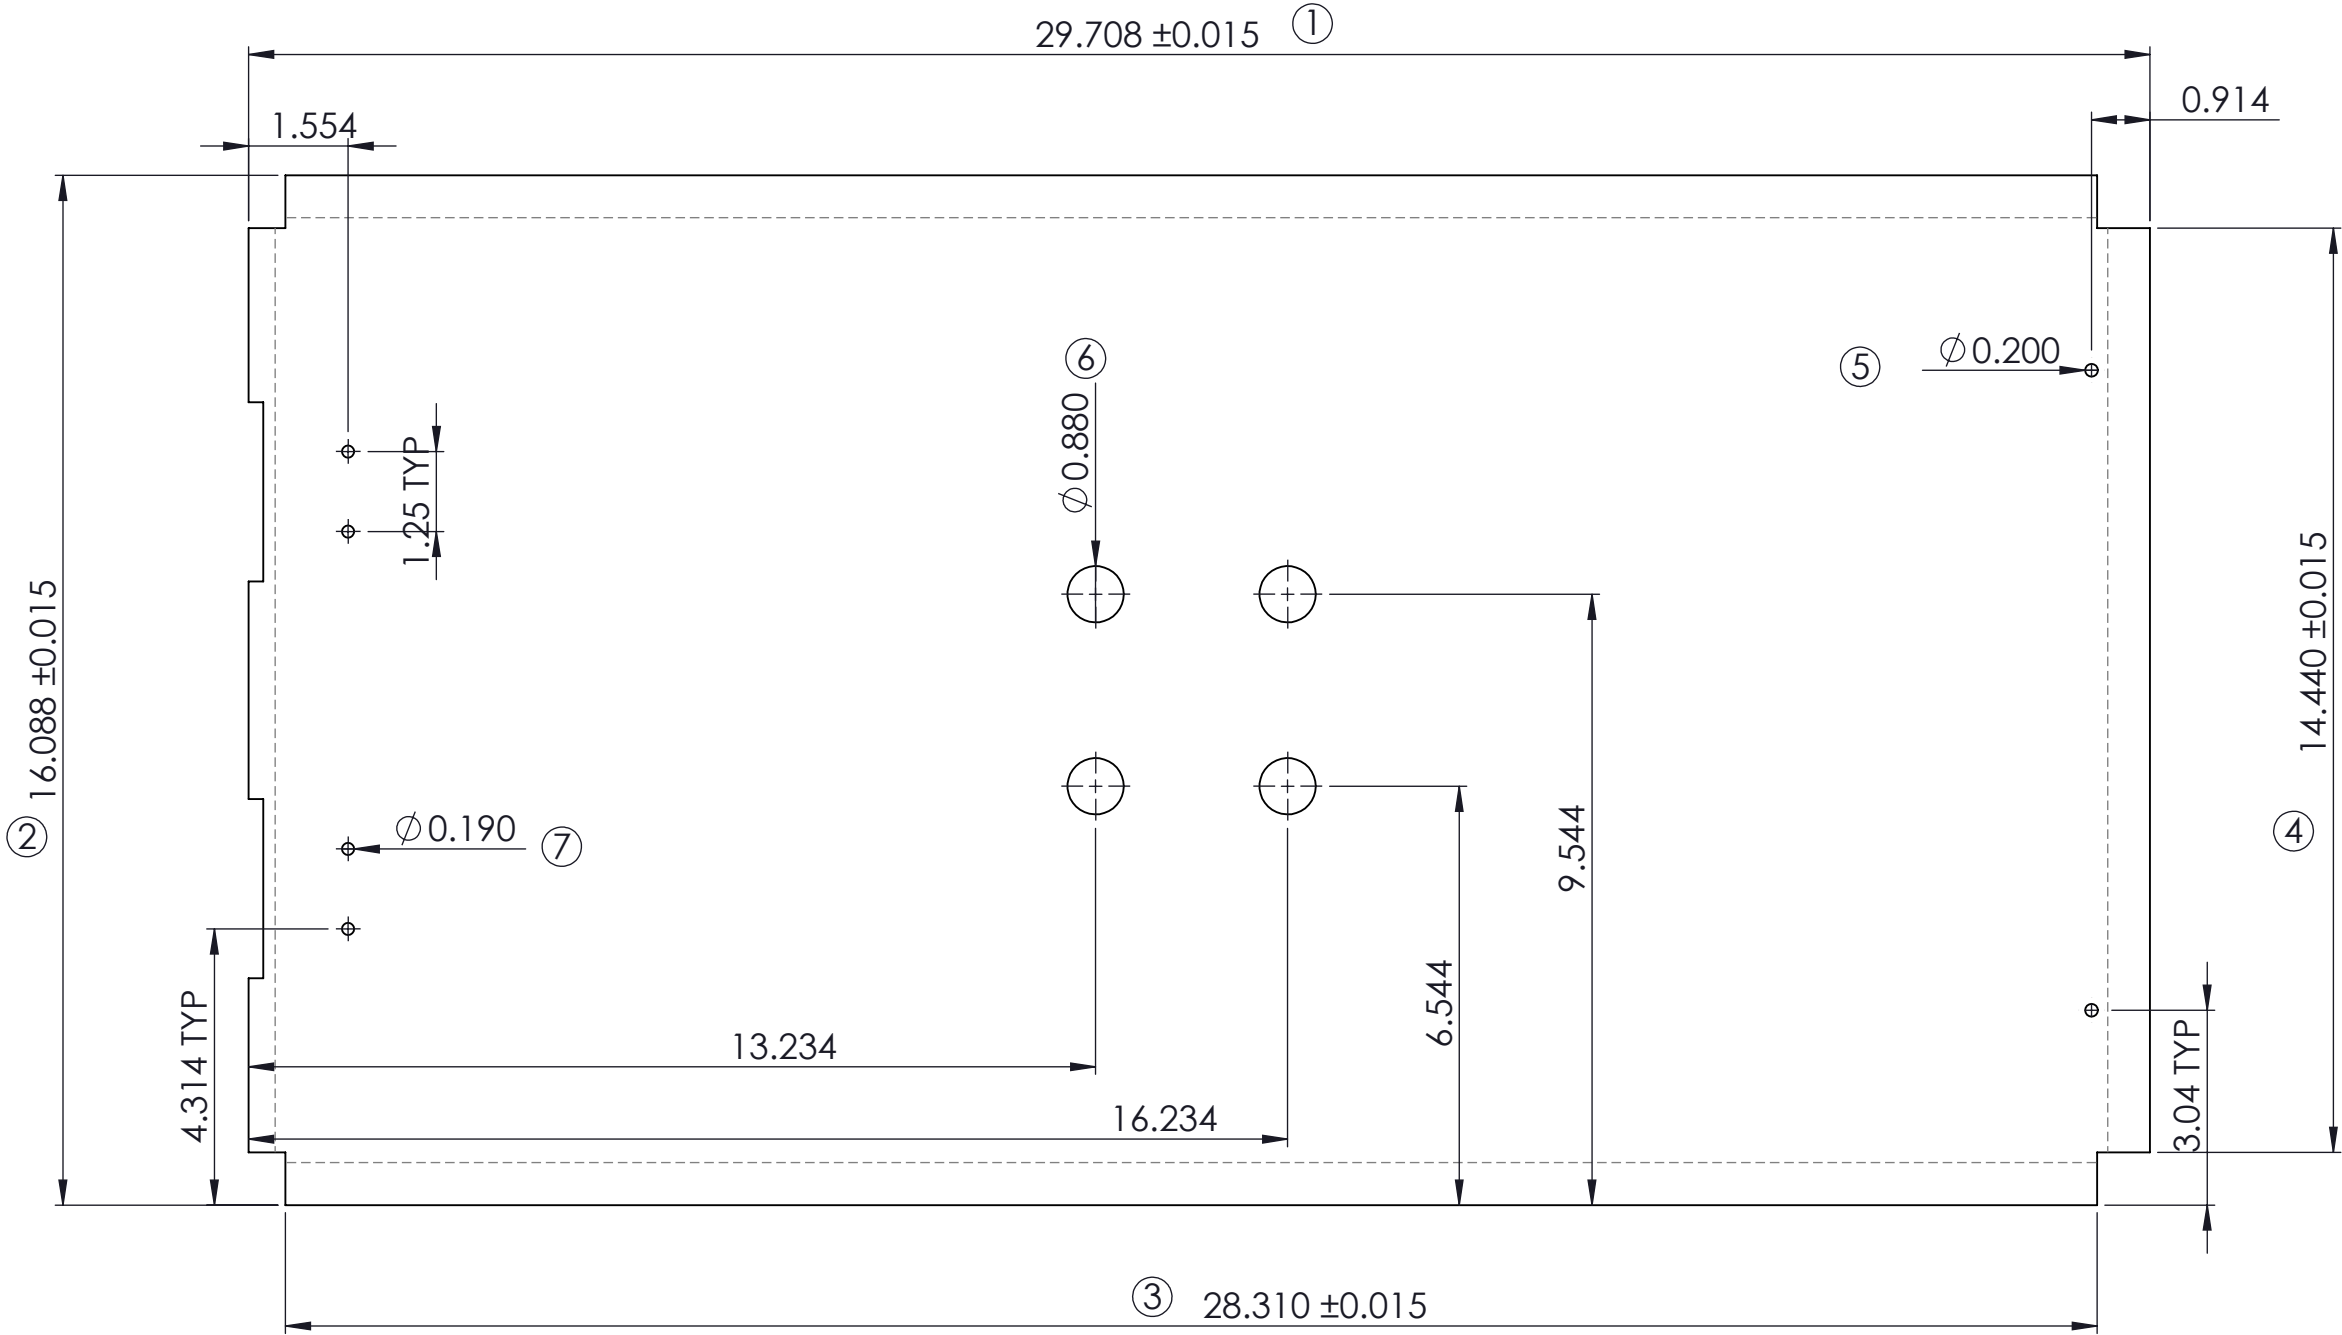
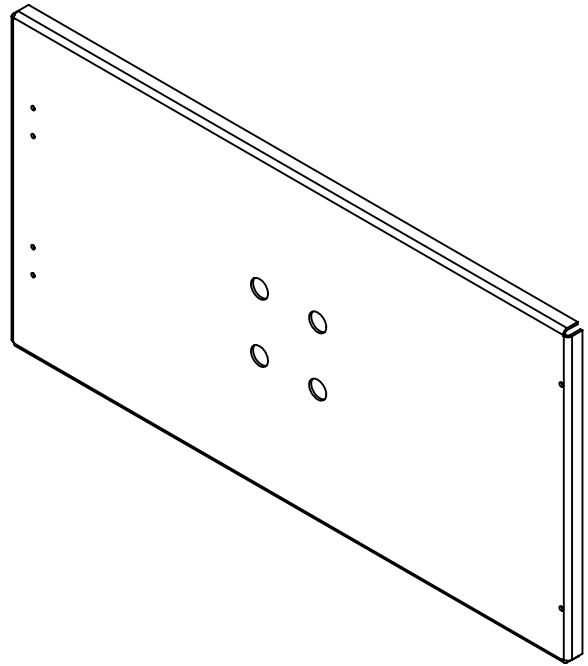
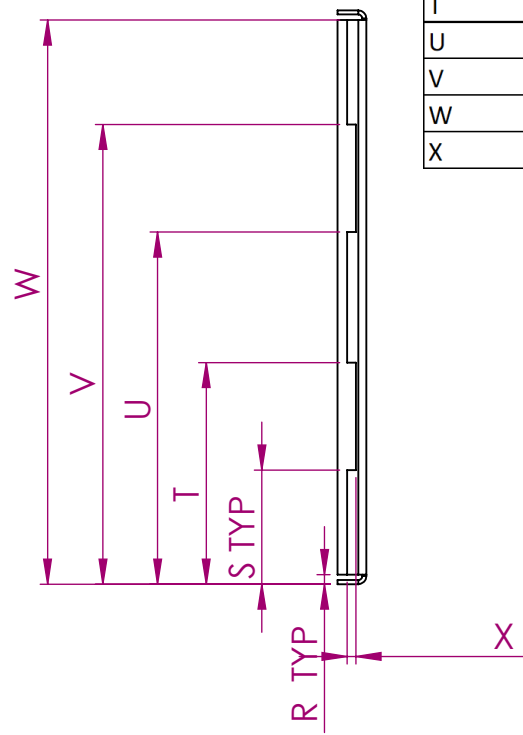


No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	29.708	29.693	29.723				
2	LASER	16.088	16.073	16.103				
3	LASER	28.310	28.295	28.325				
4	LASER	14.440	14.425	14.455				
5	LASER	0.200	0.185	0.215				
6	LASER	0.880	0.865	0.895				
7	LASER	0.190	0.175	0.205				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	PP17250-05-(12gacr ANSI-61) - K48 - V0-R0	21/07/2026	0.48	16.088	29.708	0.105

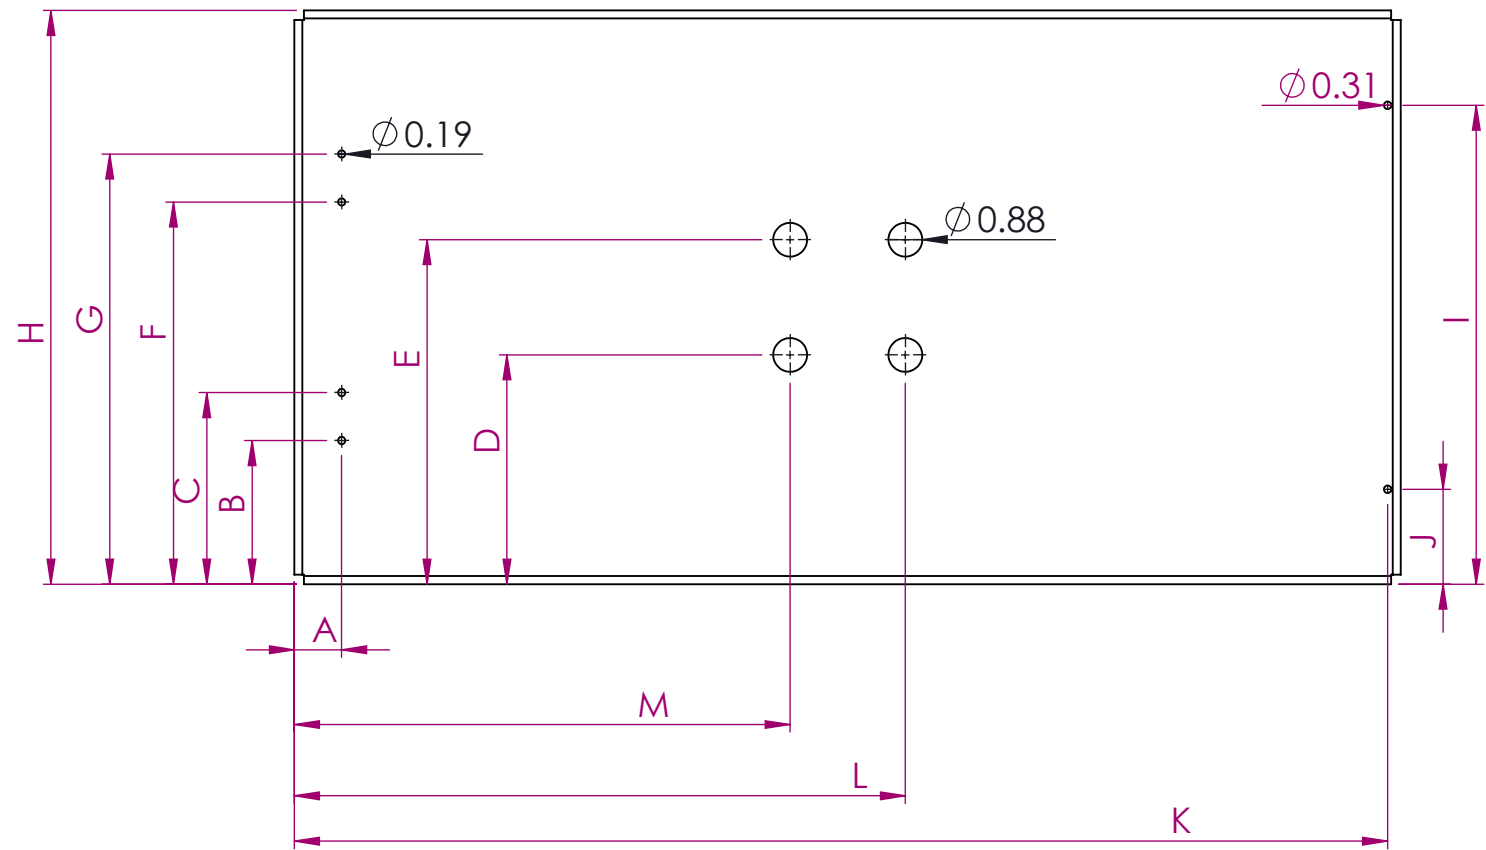

Tolerances: .XX ± .030 .XXX ± .015 Angular ± 2° Units are in inches		INSTRUMENT DOOR 32"W X 15"H				Dwn No: PP17250-05-(12gacr ANSI-61) - K48 - V0-R0		Rev: 00	
		Dwn: JRFM	21/07/2026	Chk: JRFM	21/07/2026	Apvd: JRFM	21/07/2026	Sht 1 of 1	

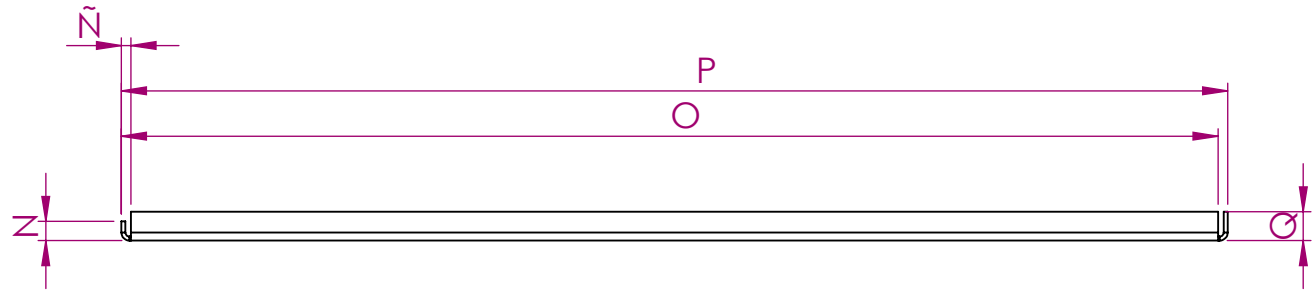

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	1.230	1.215	1.245				
B	3.740	3.725	3.755				
C	4.990	4.975	5.005				
D	5.970	5.955	5.985				
E	8.970	8.955	8.985				
F	9.950	9.935	9.965				
G	11.200	11.185	11.215				
H	14.940	14.925	14.955				
I	12.470	12.455	12.485				
J	2.470	2.455	2.485				
K	28.470	28.455	28.485				
L	15.910	15.895	15.925				
M	12.910	12.895	12.925				
N	0.500	0.485	0.515				
Ñ	0.250	0.235	0.265				
O	28.560	28.545	28.575				
P	28.810	28.795	28.825				
Q	0.750	0.735	0.765				
R	0.250	0.235	0.265				
S	2.970	2.955	2.985				
T	5.770	5.755	5.785				
U	9.170	9.155	9.185				
V	11.970	11.955	11.985				
W	14.670	14.655	14.685				
X	0.230	0.215	0.245				

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	16 mm			