



MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo MFG
A	3.740	3.725	3.755				
B	1.250	1.235	1.265				
C	1.230	1.215	1.245				
D	17.410	17.395	17.425				
E	3.630	3.615	3.645				
F	0.340	0.325	0.355				
G	4.970	4.955	4.985				
H	9.970	9.955	9.985				
I	4.970	4.955	4.985				
J	3.000	2.985	3.015				
K	0.500	0.485	0.515				
L	0.250	0.235	0.265				
M	0.750	0.735	0.765				
N	34.810	34.795	34.825				
Ñ	0.230	0.215	0.245				
O	2.950	2.935	2.965				
P	2.800	2.785	2.815				
Q	2.970	2.955	2.985				
R	19.940	19.925	19.955				
S	0.250	0.235	0.265				

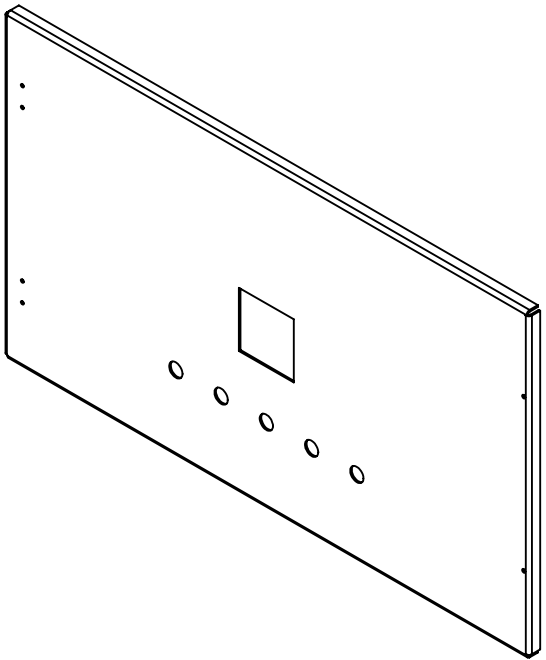


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:

.XX	±	.030
.XXX	±	.015
Angular	±	2°

Units are in inches



38W X 20H INSTRUMENT DOOR
Q-111, Q-22


Dwn No:
PP19152-04-(12gacr ANSI-61) - K48 - V0-R0

Rev: 00

Dwn: AWV	28/04/2026	Chk: AWV	28/04/2026	Apvd: AWV	28/04/2026	Sht 1 of 1
----------	------------	----------	------------	-----------	------------	------------

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	35.712	35.697	35.727				
2	LASER	34.410	34.395	34.425				
3	LASER	21.092	21.077	21.107				
4	LASER	19.440	19.425	19.455				
5	LASER	3.630	3.615	3.645				
6	LASER	0.200	0.185	0.215				
7	LASER	0.190	0.175	0.205				
8	LASER	0.880	0.865	0.895				

CORTE

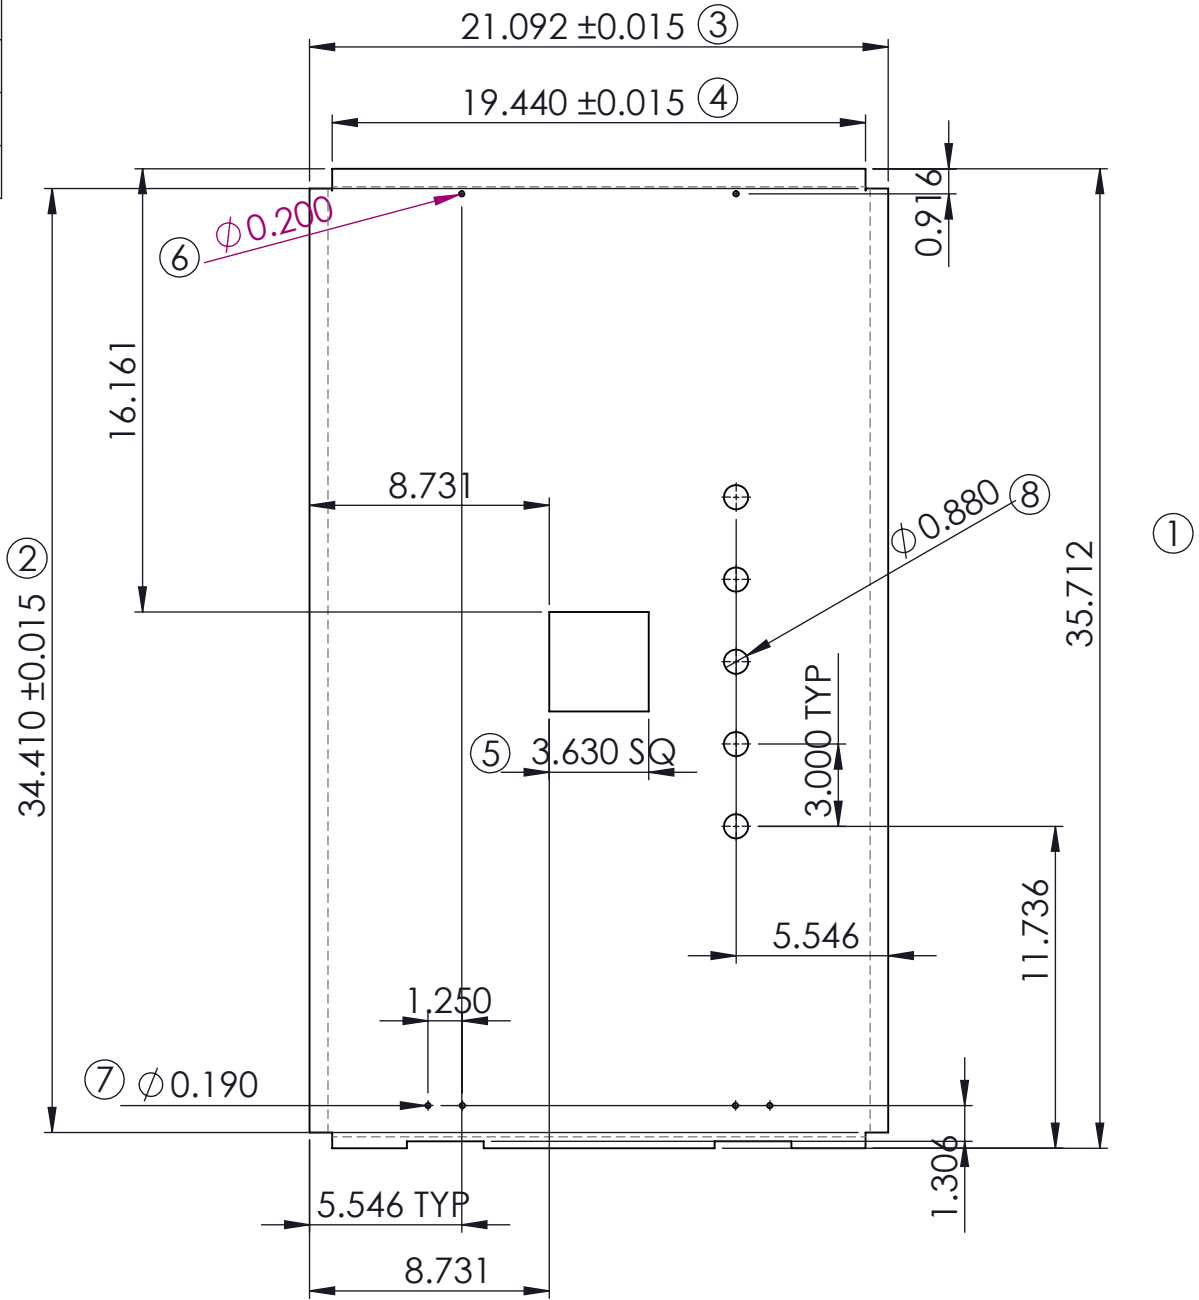

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	PP19152-04-(12gacr ANSI-61) - K48 - V0-R0	28/04/26	0.48	19.94	34.81	0.105
R1						
R2						
R3						

OC:

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



38W X 20H INSTRUMENT DOOR
Q-111 , (X5) Q-22

Dwn No:
PP19152-04-(12gacr ANSI-61) - K48 - V0-R0

Rev:
00

Dwn: AWV 28/04/2026 Chk: AWV 28/04/2026 Apvd: AWV 28/04/2026 Sht 1 of 1