


No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	43.708	43.693	43.723				
2	LASER	11.088	11.073	11.103				
3	LASER	42.180	42.165	42.195				
4	LASER	9.440	9.425	9.455				
5	LASER	0.200	0.185	0.215				
6	LASER	0.190	0.175	0.205				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	PP19380-03-(12gacr ANSI-61) - K48 - V0-R0	16/07/2026	0.48	11.088	43.708	0.105

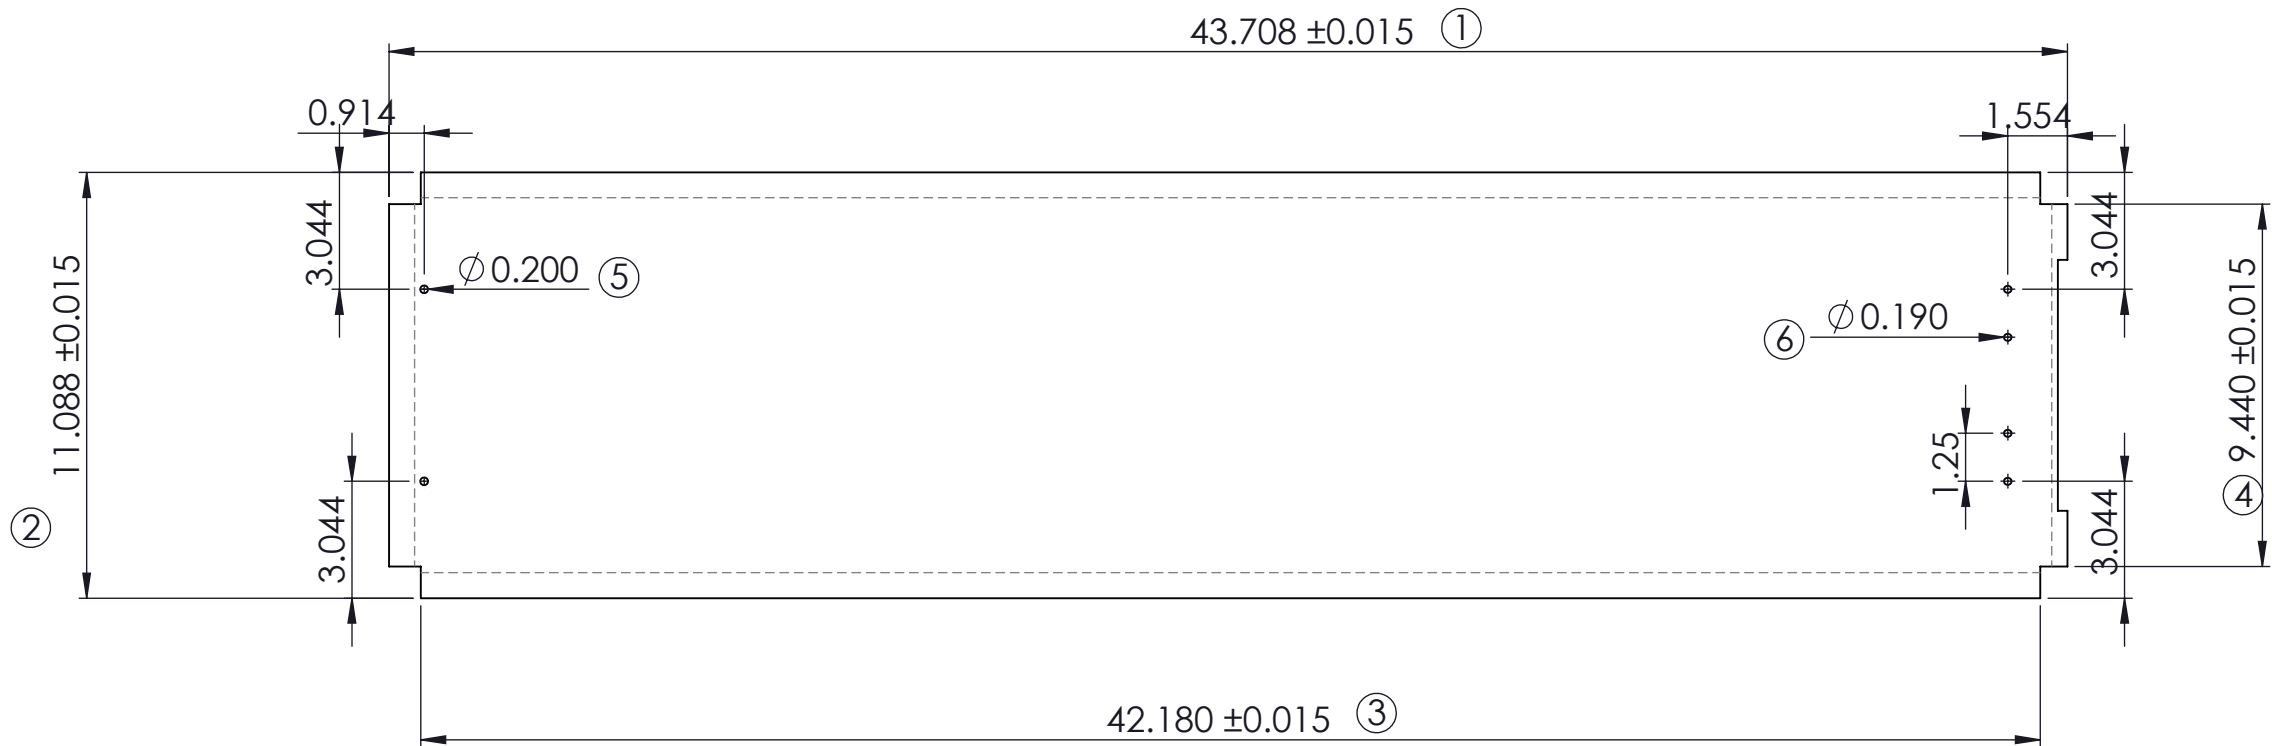

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.340	0.325	0.355				
B	2.470	2.455	2.485				
C	9.940	9.925	9.955				
D	2.470	2.455	2.485				
E	1.230	1.215	1.245				
F	2.470	2.455	2.485				
G	1.250	1.235	1.265				
H	0.250	0.235	0.265				
I	1.700	1.685	1.715				
J	42.810	42.795	42.825				
K	0.250	0.235	0.265				
L	0.750	0.735	0.765				
M	0.500	0.485	0.515				
N	0.380	0.365	0.395				







TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

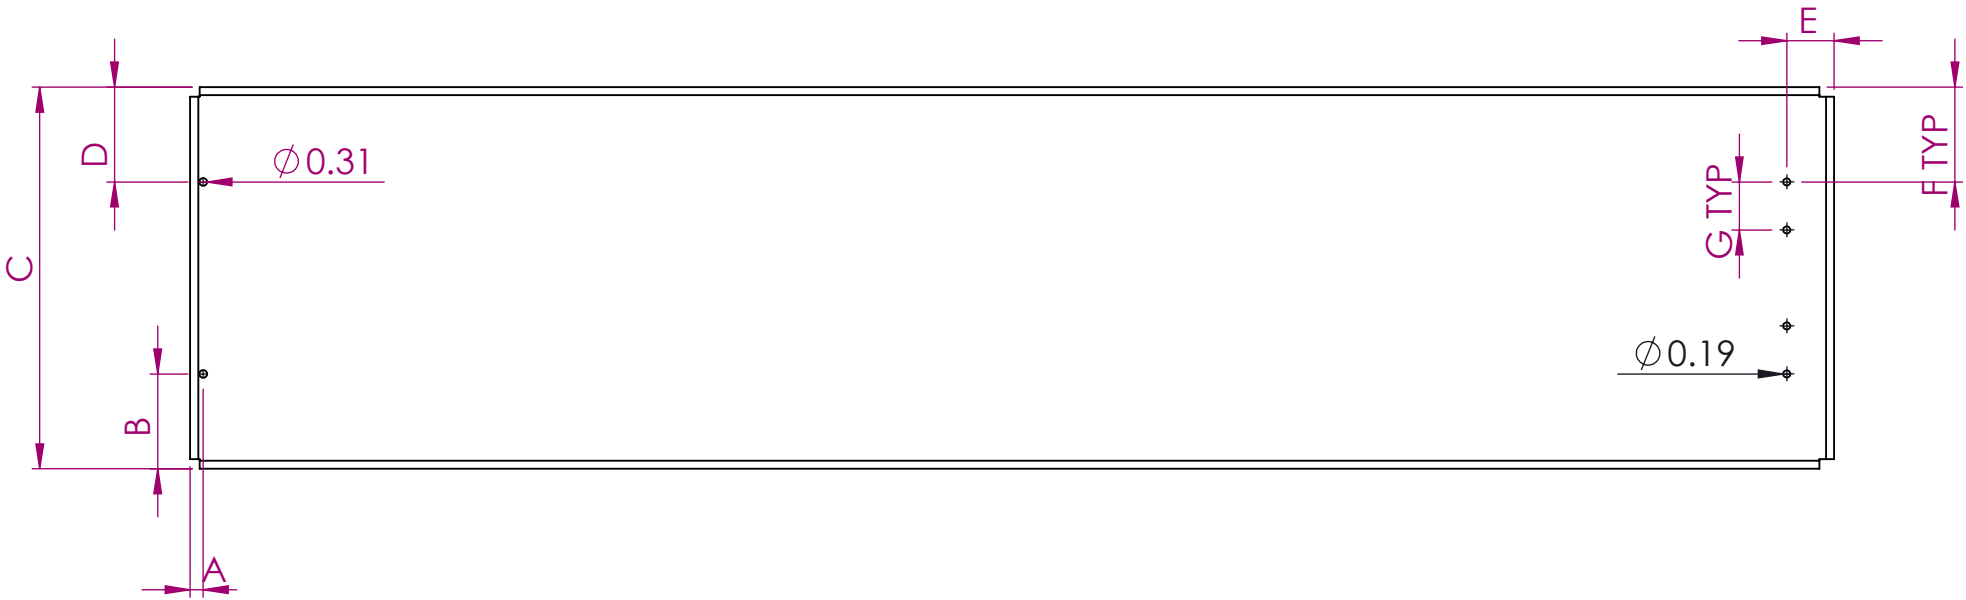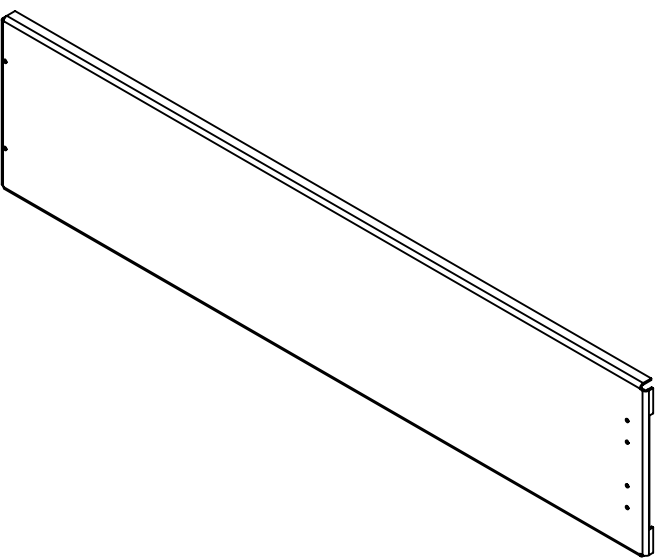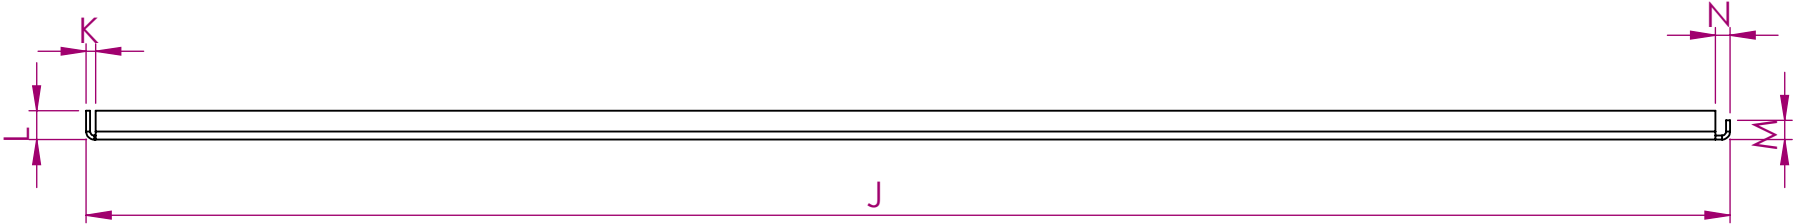

38W X 10H BLANK DOOR				Dwn No: PP19380-03-(12gacr ANSI-61) - K48 - V0-R0		Rev: 00
Dwn: JRFM	16/07/2026	Chk: JRFM	16/07/2026	Apvd: JRFM	16/07/2026	Sht 1 of 1