


No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	36.109	36.094	36.124				
2	LASER	16.239	16.224	16.254				
3	LASER	34.564	34.549	34.579				
4	LASER	14.400	14.385	14.415				
5	LASER	0.312	0.297	0.327				
6	LASER	0.150	0.135	0.165				
7	LASER	2.940	2.925	2.955				





REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	PP19568-02-(16gacr 16gacr) - K48 - V0-R0	17/07/2026	0.48	16.239	36.109	0.060




Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

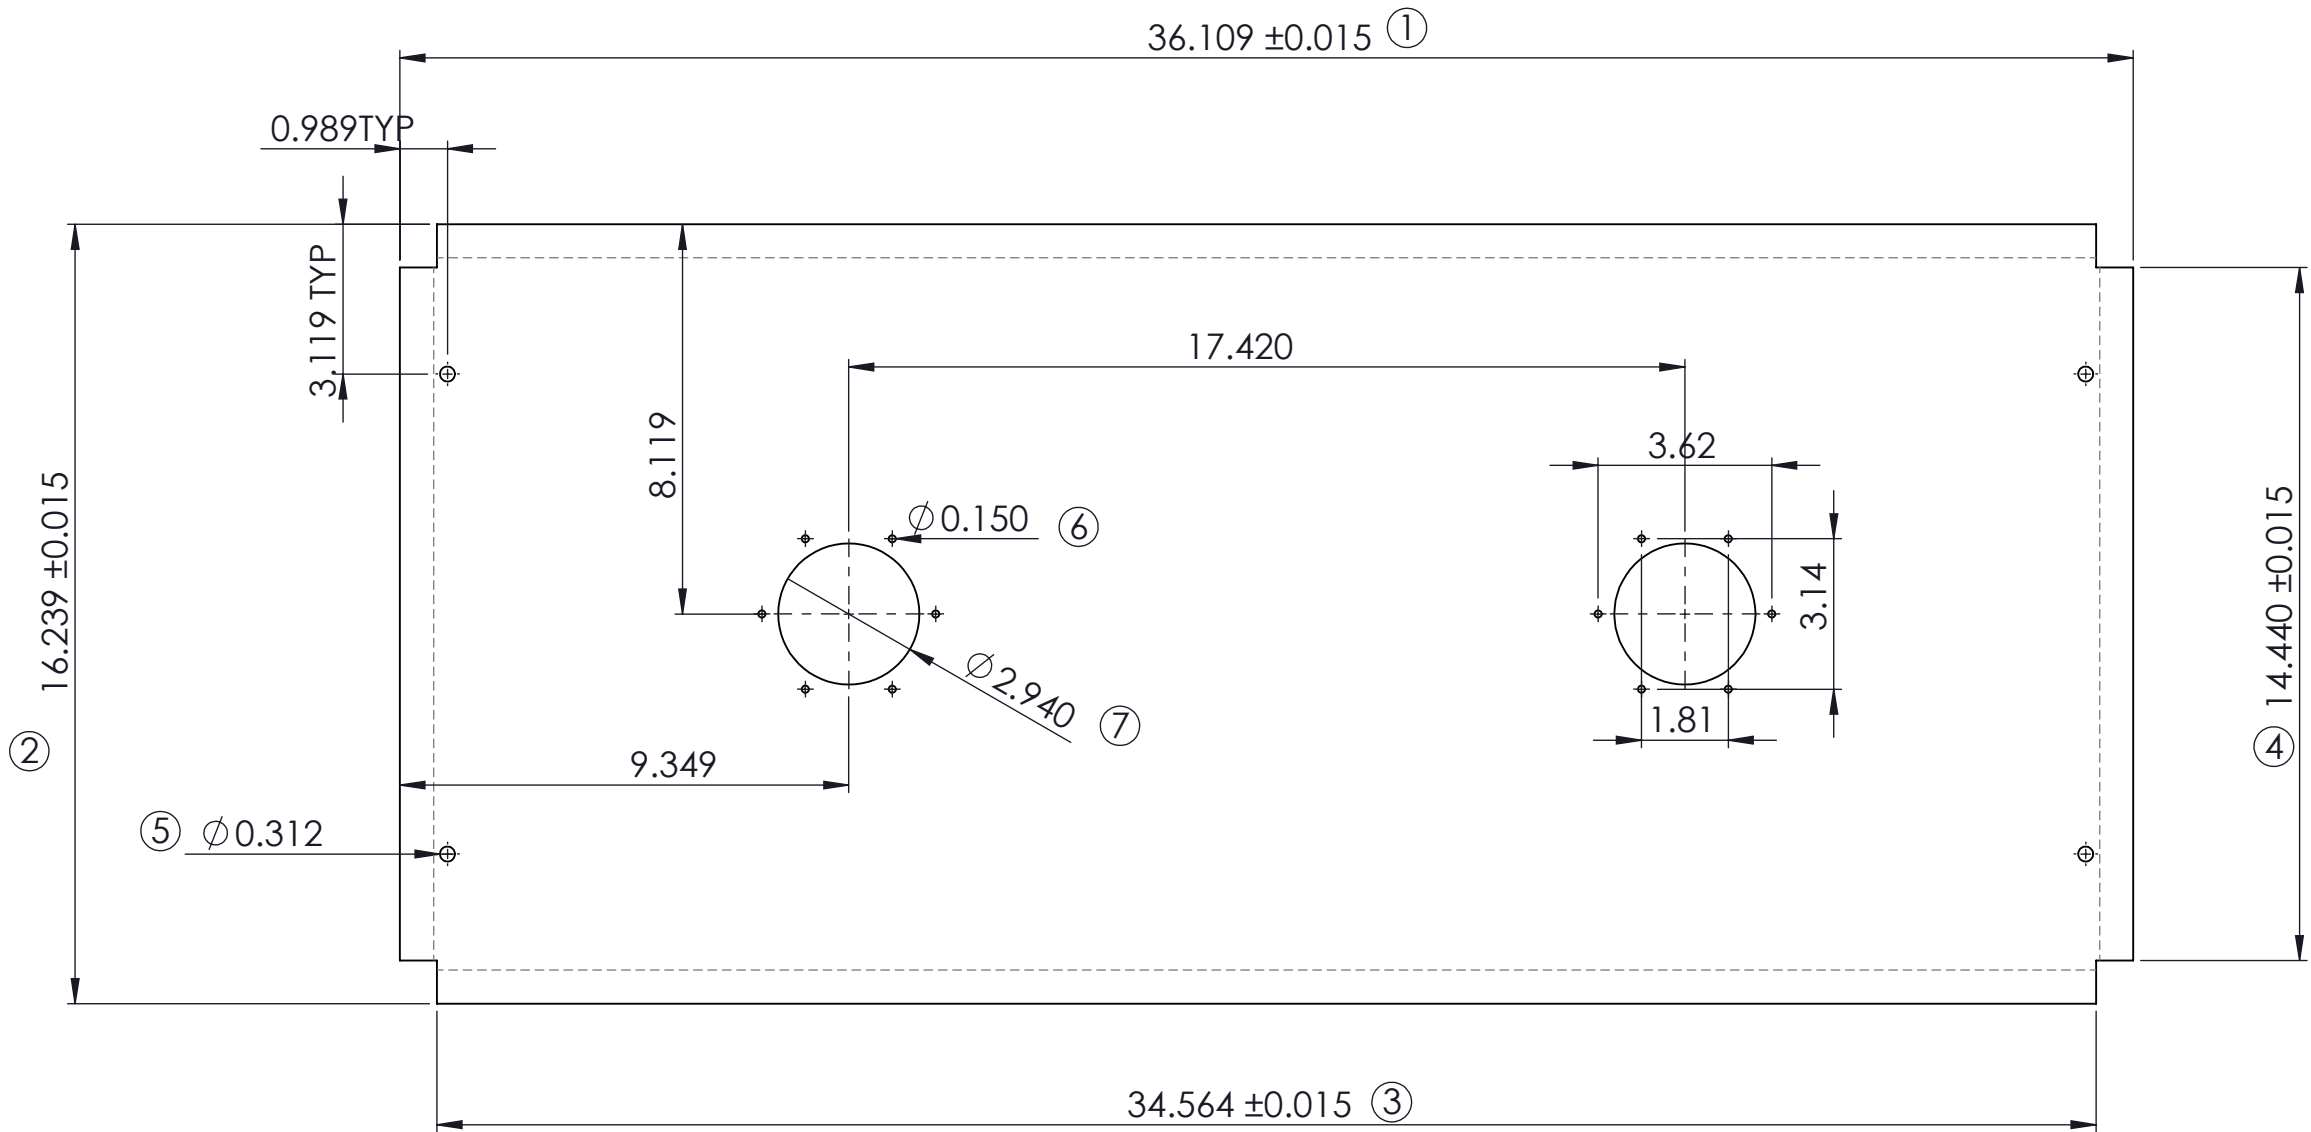

15.00" COVER IR WINDOW				Dwn No: PP19568-02-(16gacr 16gacr) - K48 - V0-R0		Rev: 00	
Dwn: JRFM	17/07/2026	Chk: JRFM	17/07/2026	Apvd: JRFM	17/07/2026	Sht 1 of 1	

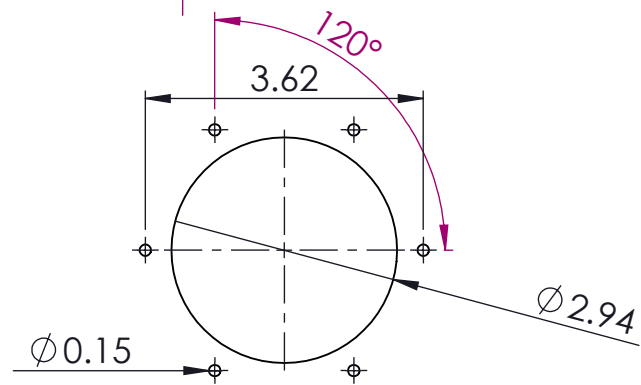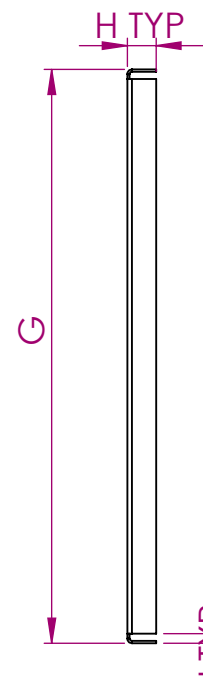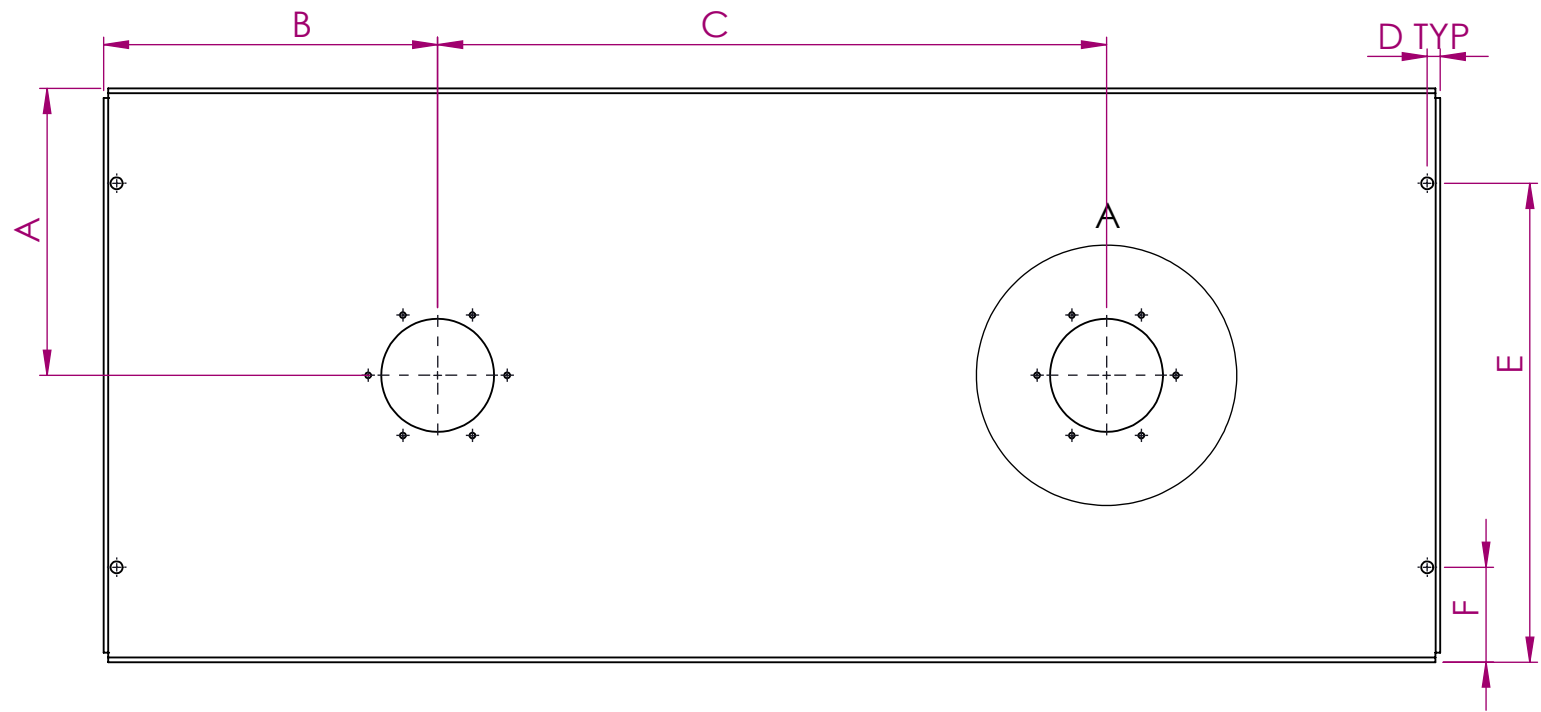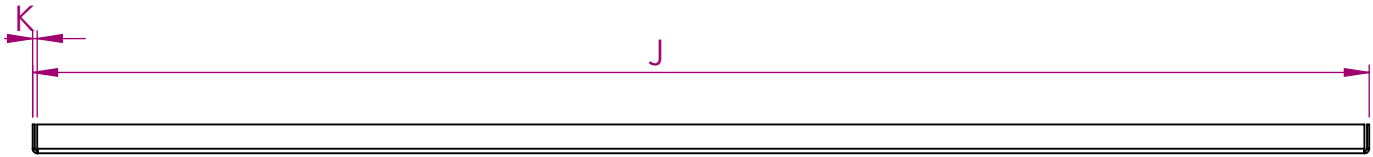

DETALLE A
ESCALA 2 : 5

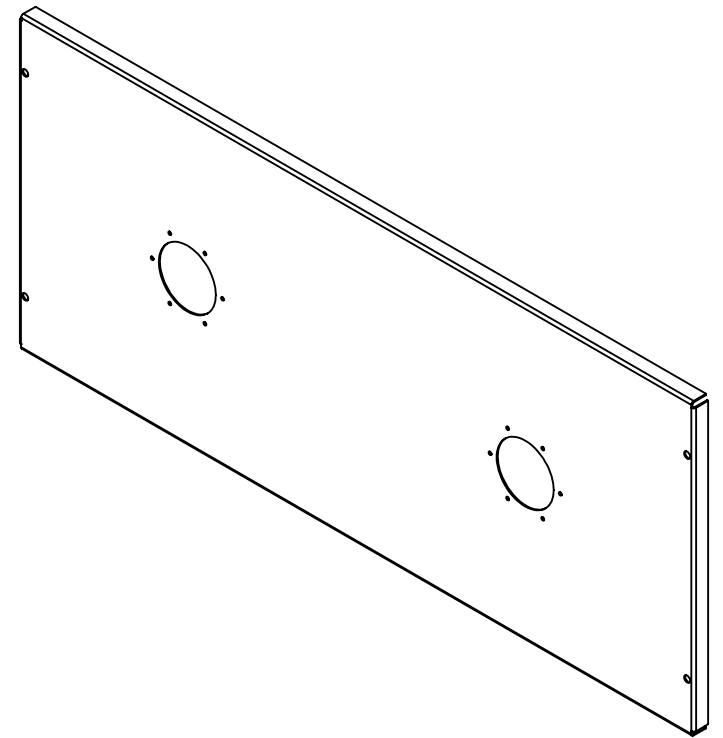

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	7.470	7.455	7.485				
B	8.700	8.685	8.715				
C	17.420	17.405	17.435				
D	0.340	0.325	0.355				
E	12.470	12.455	12.485				
F	2.470	2.455	2.485				
G	14.940	14.925	14.955				
H	0.750	0.735	0.765				
I	0.250	0.235	0.265				
J	34.810	34.795	34.825				
K	0.120	0.105	0.135				

TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



15.00" COVER IR WINDOW			
Dwn: JRFM	17/07/2026	Chk: JRFM	17/07/2026

Dwn No: PP19568-02-(16gacr 16gacr) - K48 - V0-R0	Rev: 00
Apvd: JRFM	Sht 1 of 1