

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	2.380	2.365	2.395				
B	2.380	2.365	2.395				
C	16.970	16.955	16.985				
D	16.470	16.455	16.485				
E	15.090	15.075	15.105				
F	0.310	0.295	0.325				
G	1.500	1.485	1.515				
H	0.310	0.295	0.325				
I	8.490	8.475	8.505				
J	0.120	0.105	0.135				
K	0.630	0.615	0.645				
L	15.000	14.985	15.015				


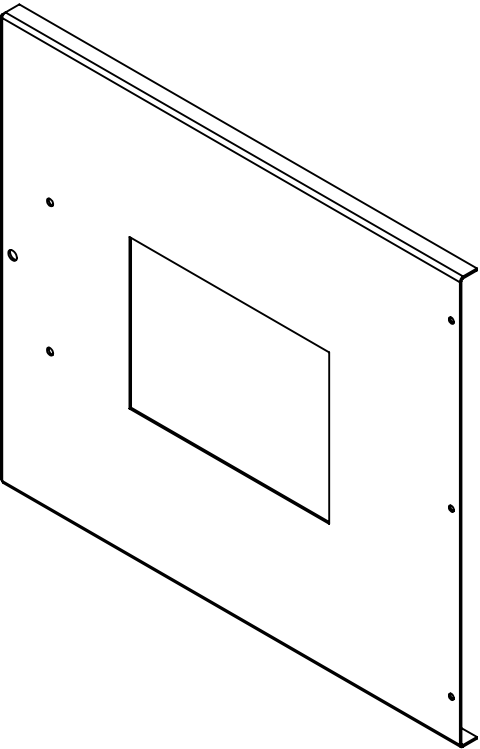


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

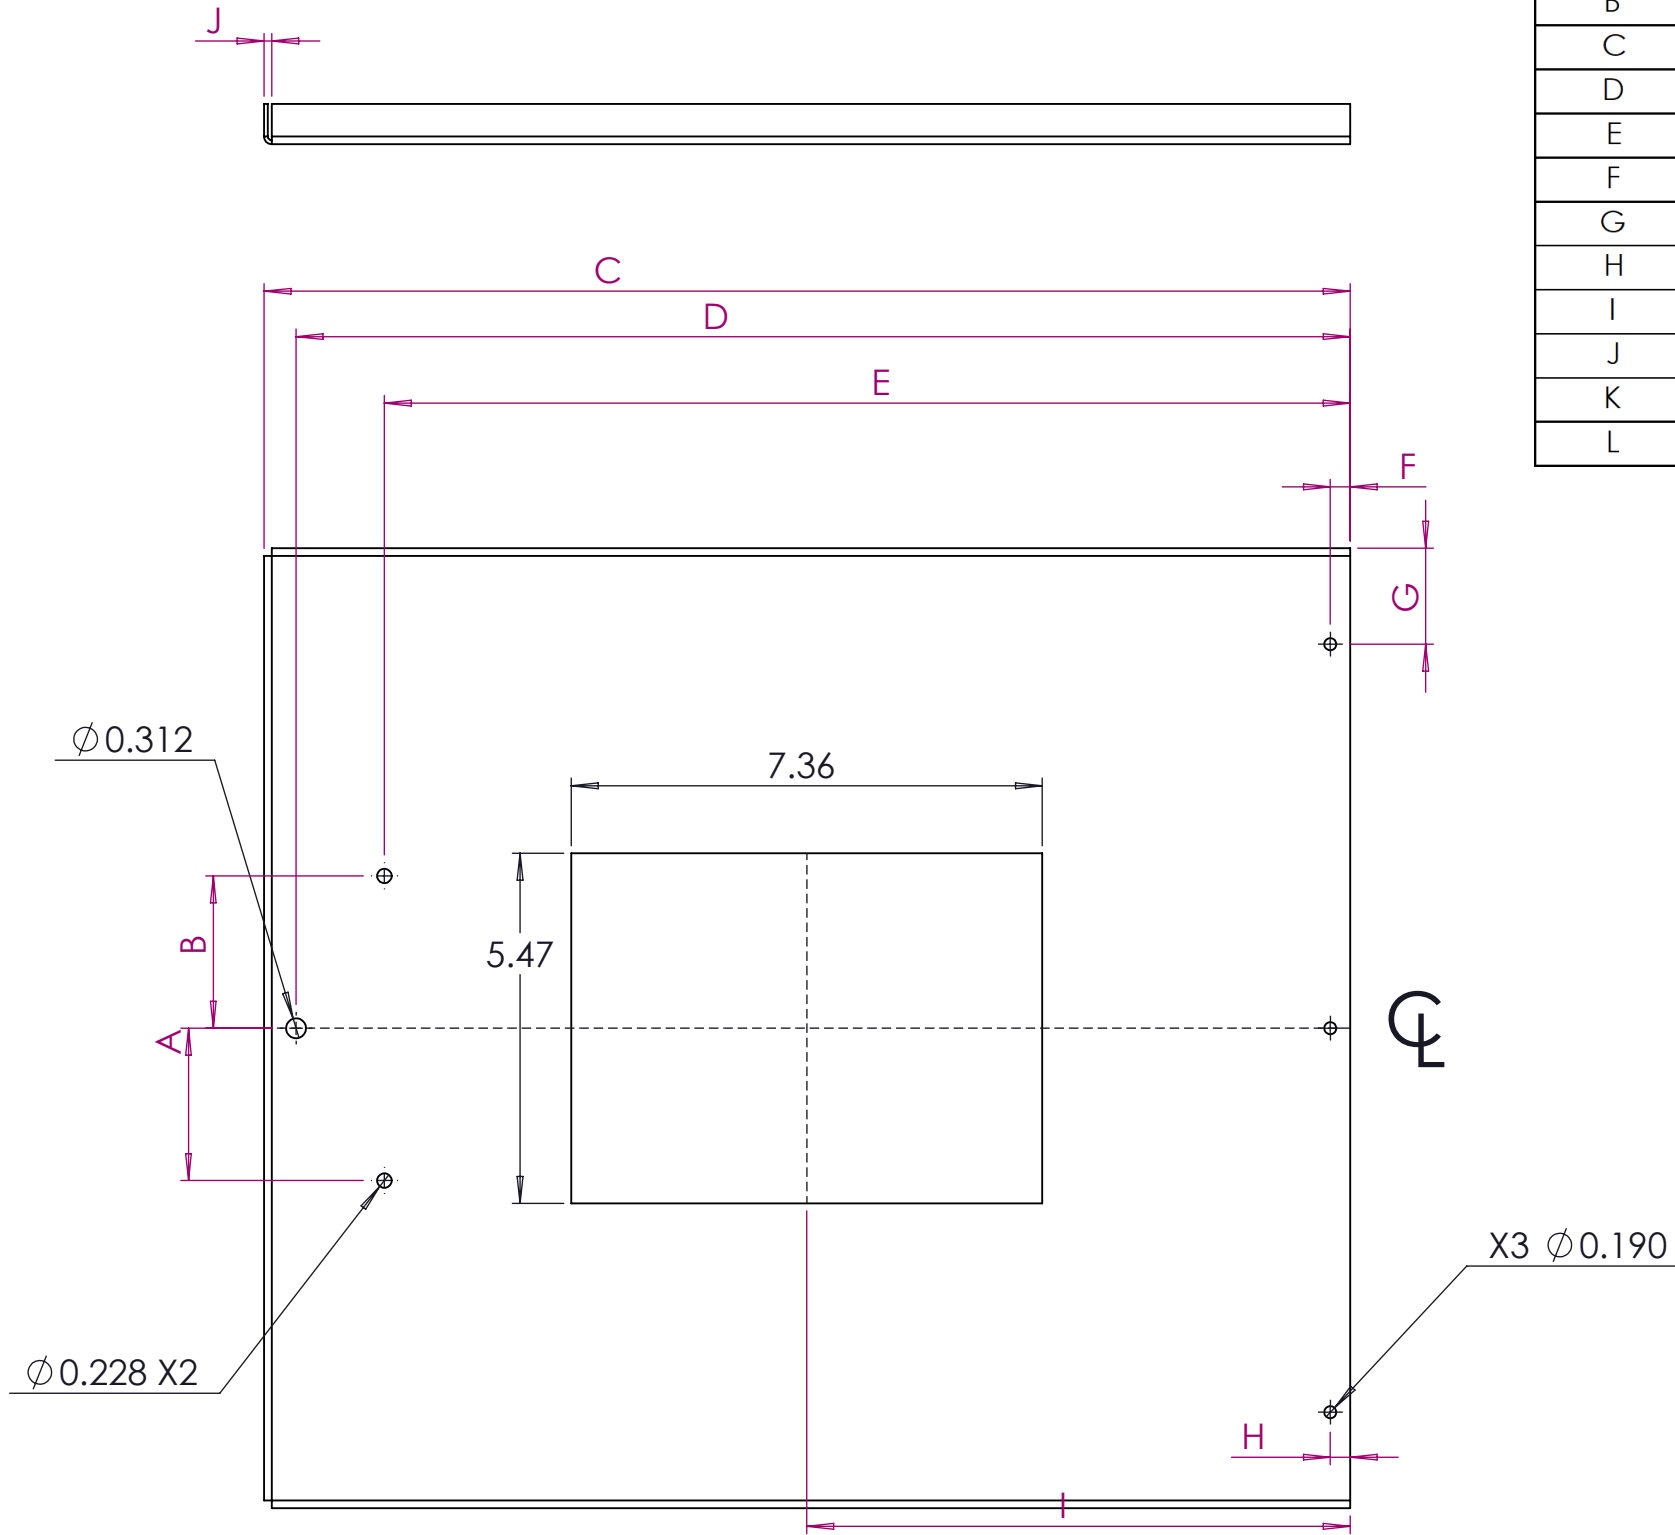


15H DIST DOOR W/SEL-2411			
Dwn: AWV	18/03/2026	Chk: AWV	18/03/2026

Dwn No: PP21340-02-(16gacr ANSI-61) - K48 - V0-R0	Rev: 00
Apvd: AWV	18/03/2026
Sht 1 of 1	

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	17.499	17.484	17.514				
2	LASER	16.059	16.044	16.074				
3	LASER	0.228	0.213	0.243				
4	LASER	7.360	7.345	7.375				
5	LASER	5.470	5.455	5.485				
6	LASER	0.190	0.175	0.205				
7	LASER	0.312	0.297	0.327				
8	LASER	0.310	0.295	0.325				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	PP21340-02-(16gacr ANSI-61) - K48 - V0-R0	18/03/26	0.48	16.059	17.499	0.060
R1						
R2						
R3						

CORTE

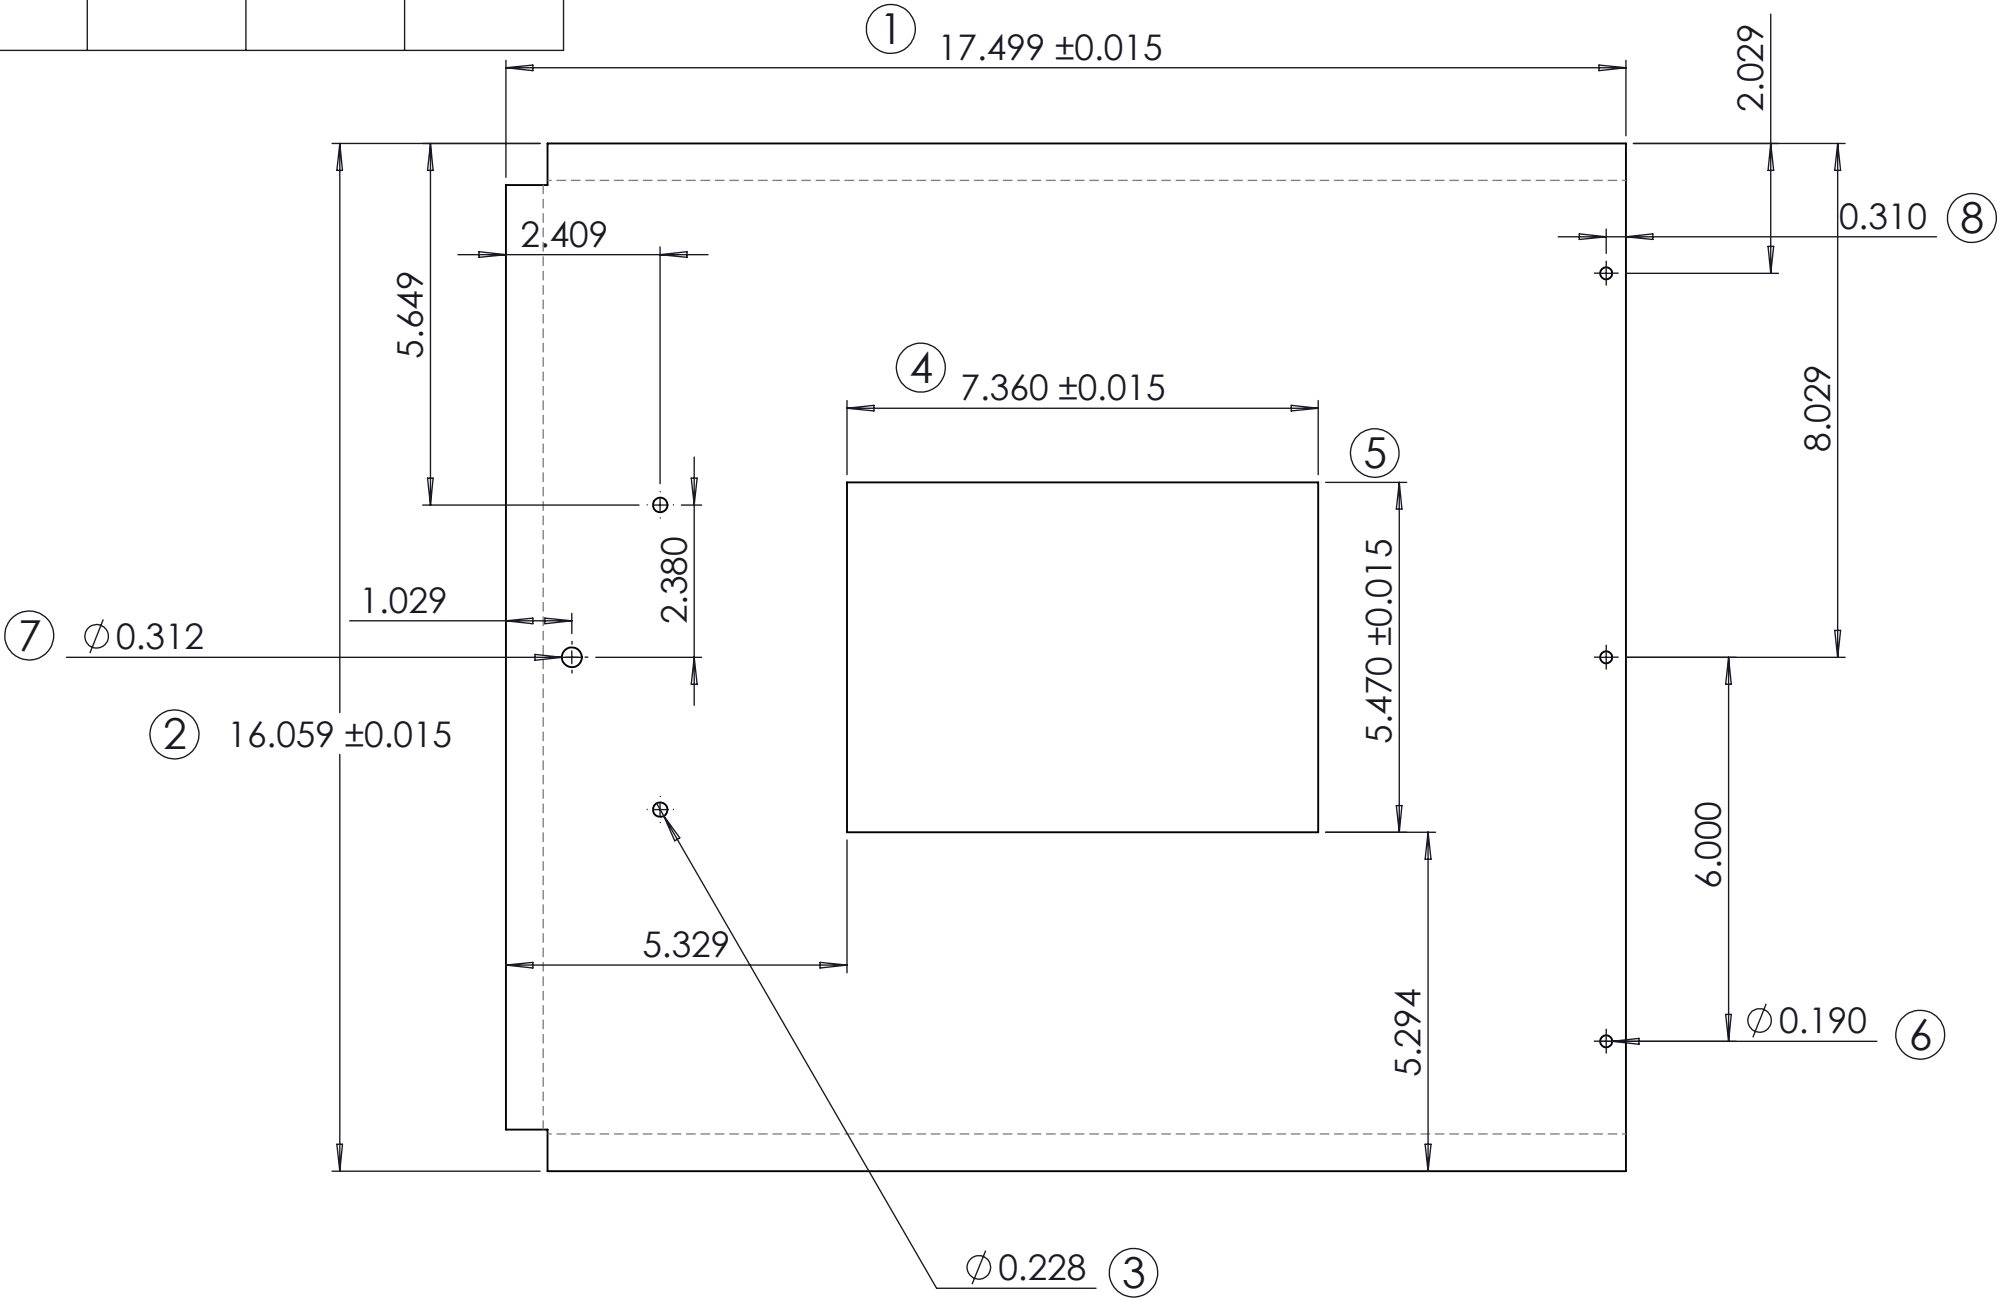

OC: