


No.	RESP	Dim	L.I.	L.S.	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	35.708	35.693	35.723				
2	LASER	16.088	16.073	16.103				
3	LASER	8.700	8.685	8.715				
4	LASER	12.200	12.185	12.215				
5	LASER	7.360	7.345	7.375				
6	LASER	5.470	5.455	5.485				
7	LASER	0.190	0.175	0.205				
8	LASER	0.880	0.865	0.895				
9	LASER	0.200	0.185	0.215				
10	LASER	0.380	0.365	0.395				
11	LASER	34.180	34.165	34.195				
12	LASER	5.380	5.365	5.395				
13	LASER	2.320	2.305	2.335				

REVISION	NOMBRE DFX	FECHA	FACTOR K	ANCHO	LARGO	ESPESOR
R0	PP22114-06-(12gacr ANSI-61) - K48 - V1-R0	21/07/2026	0.48	16.088	35.708	0.105




Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches

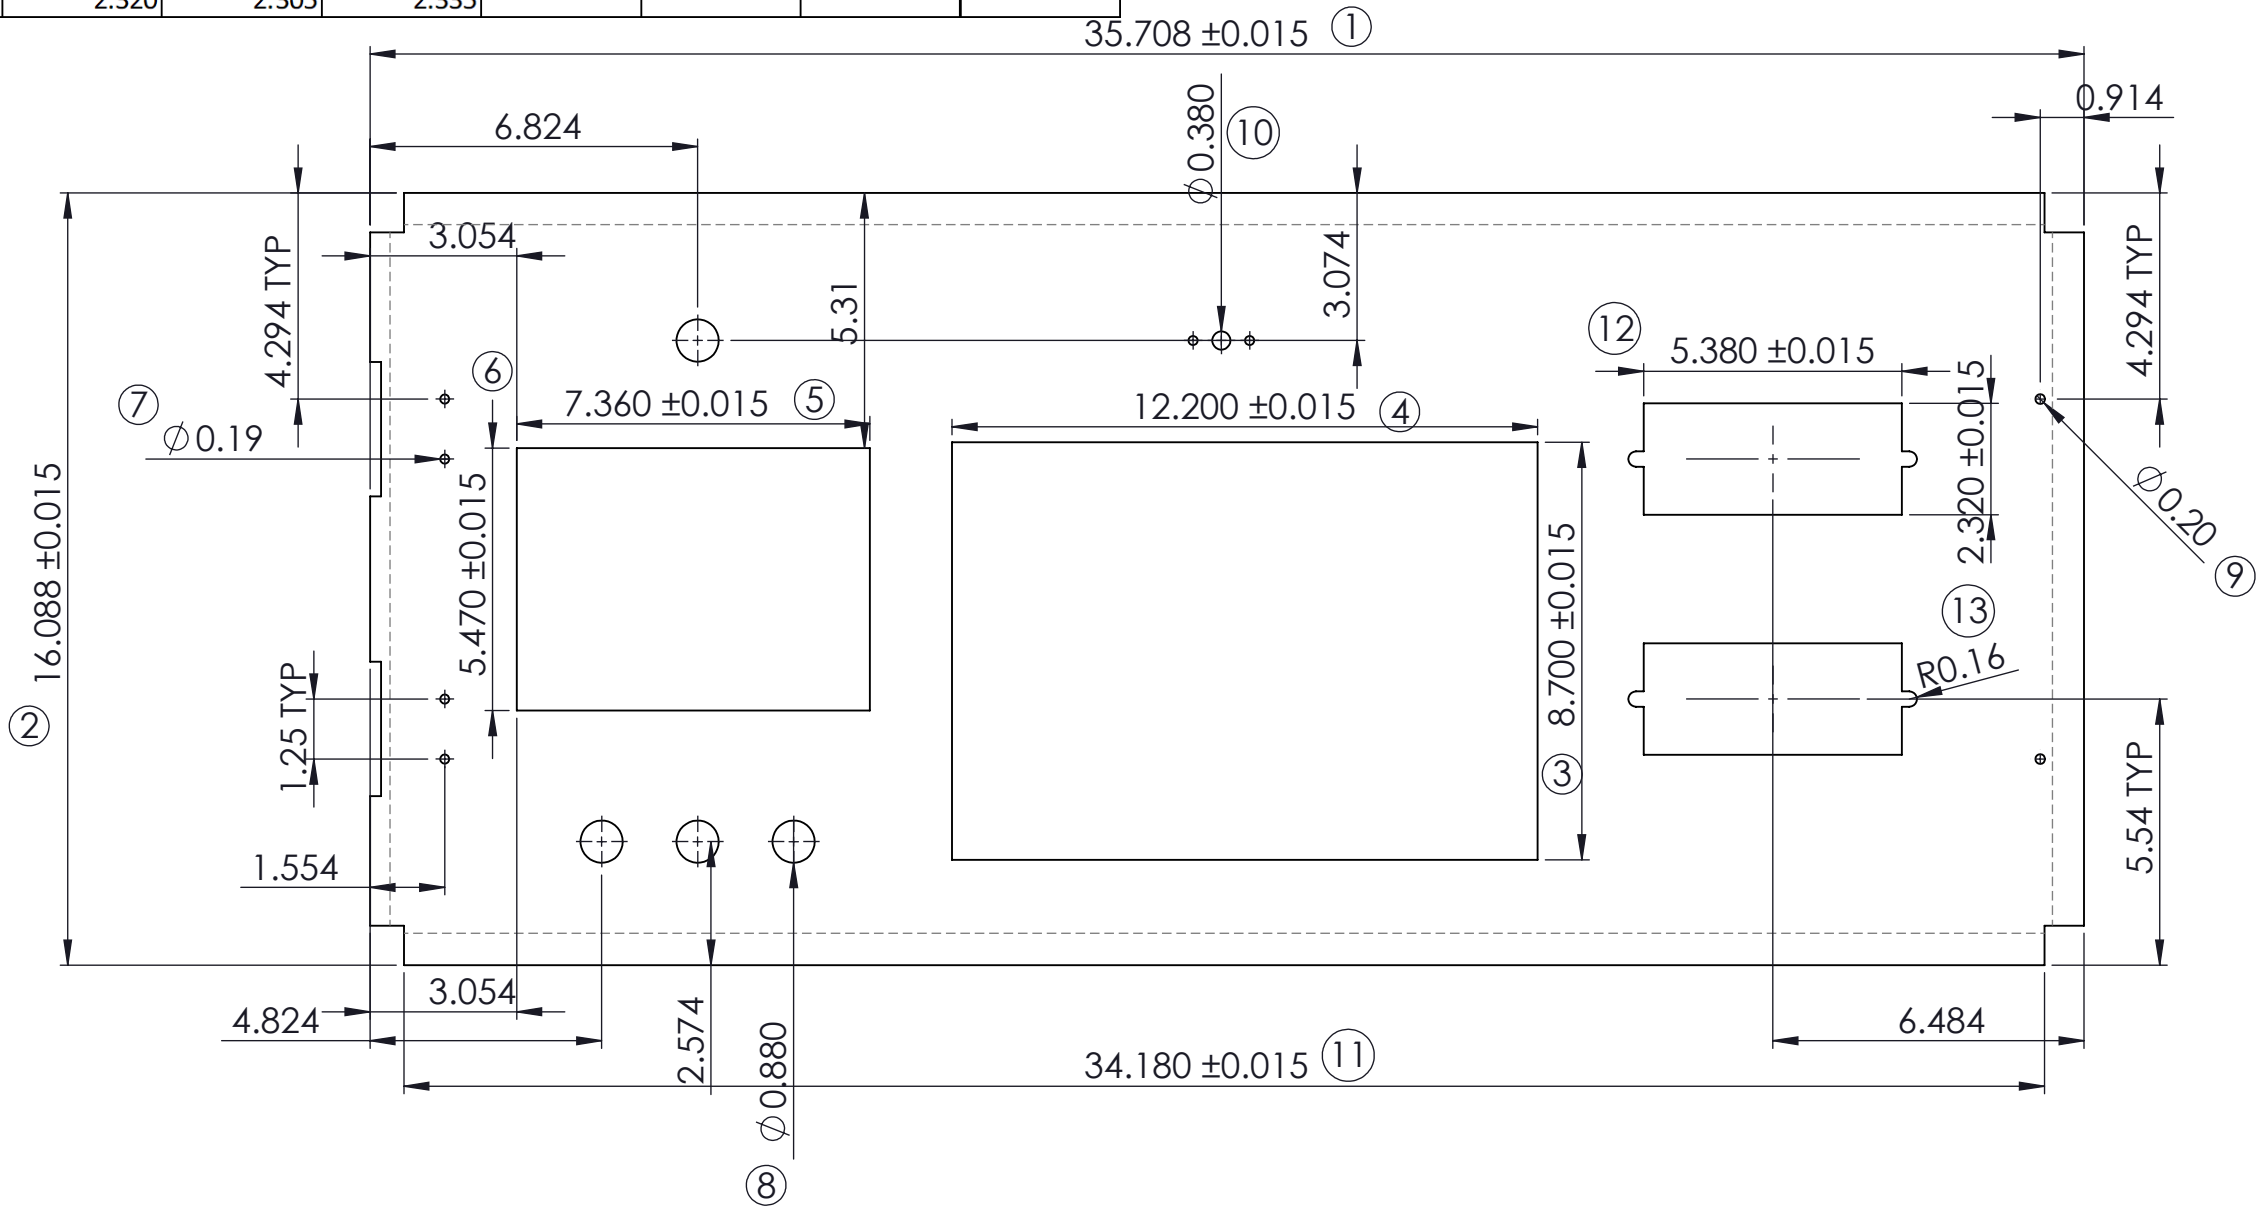

38W X 15H INSTRUMENT DOOR

Dwn No:
PP22114-06-(12gacr ANSI-61) - K48 - V1-R0

Rev:
00

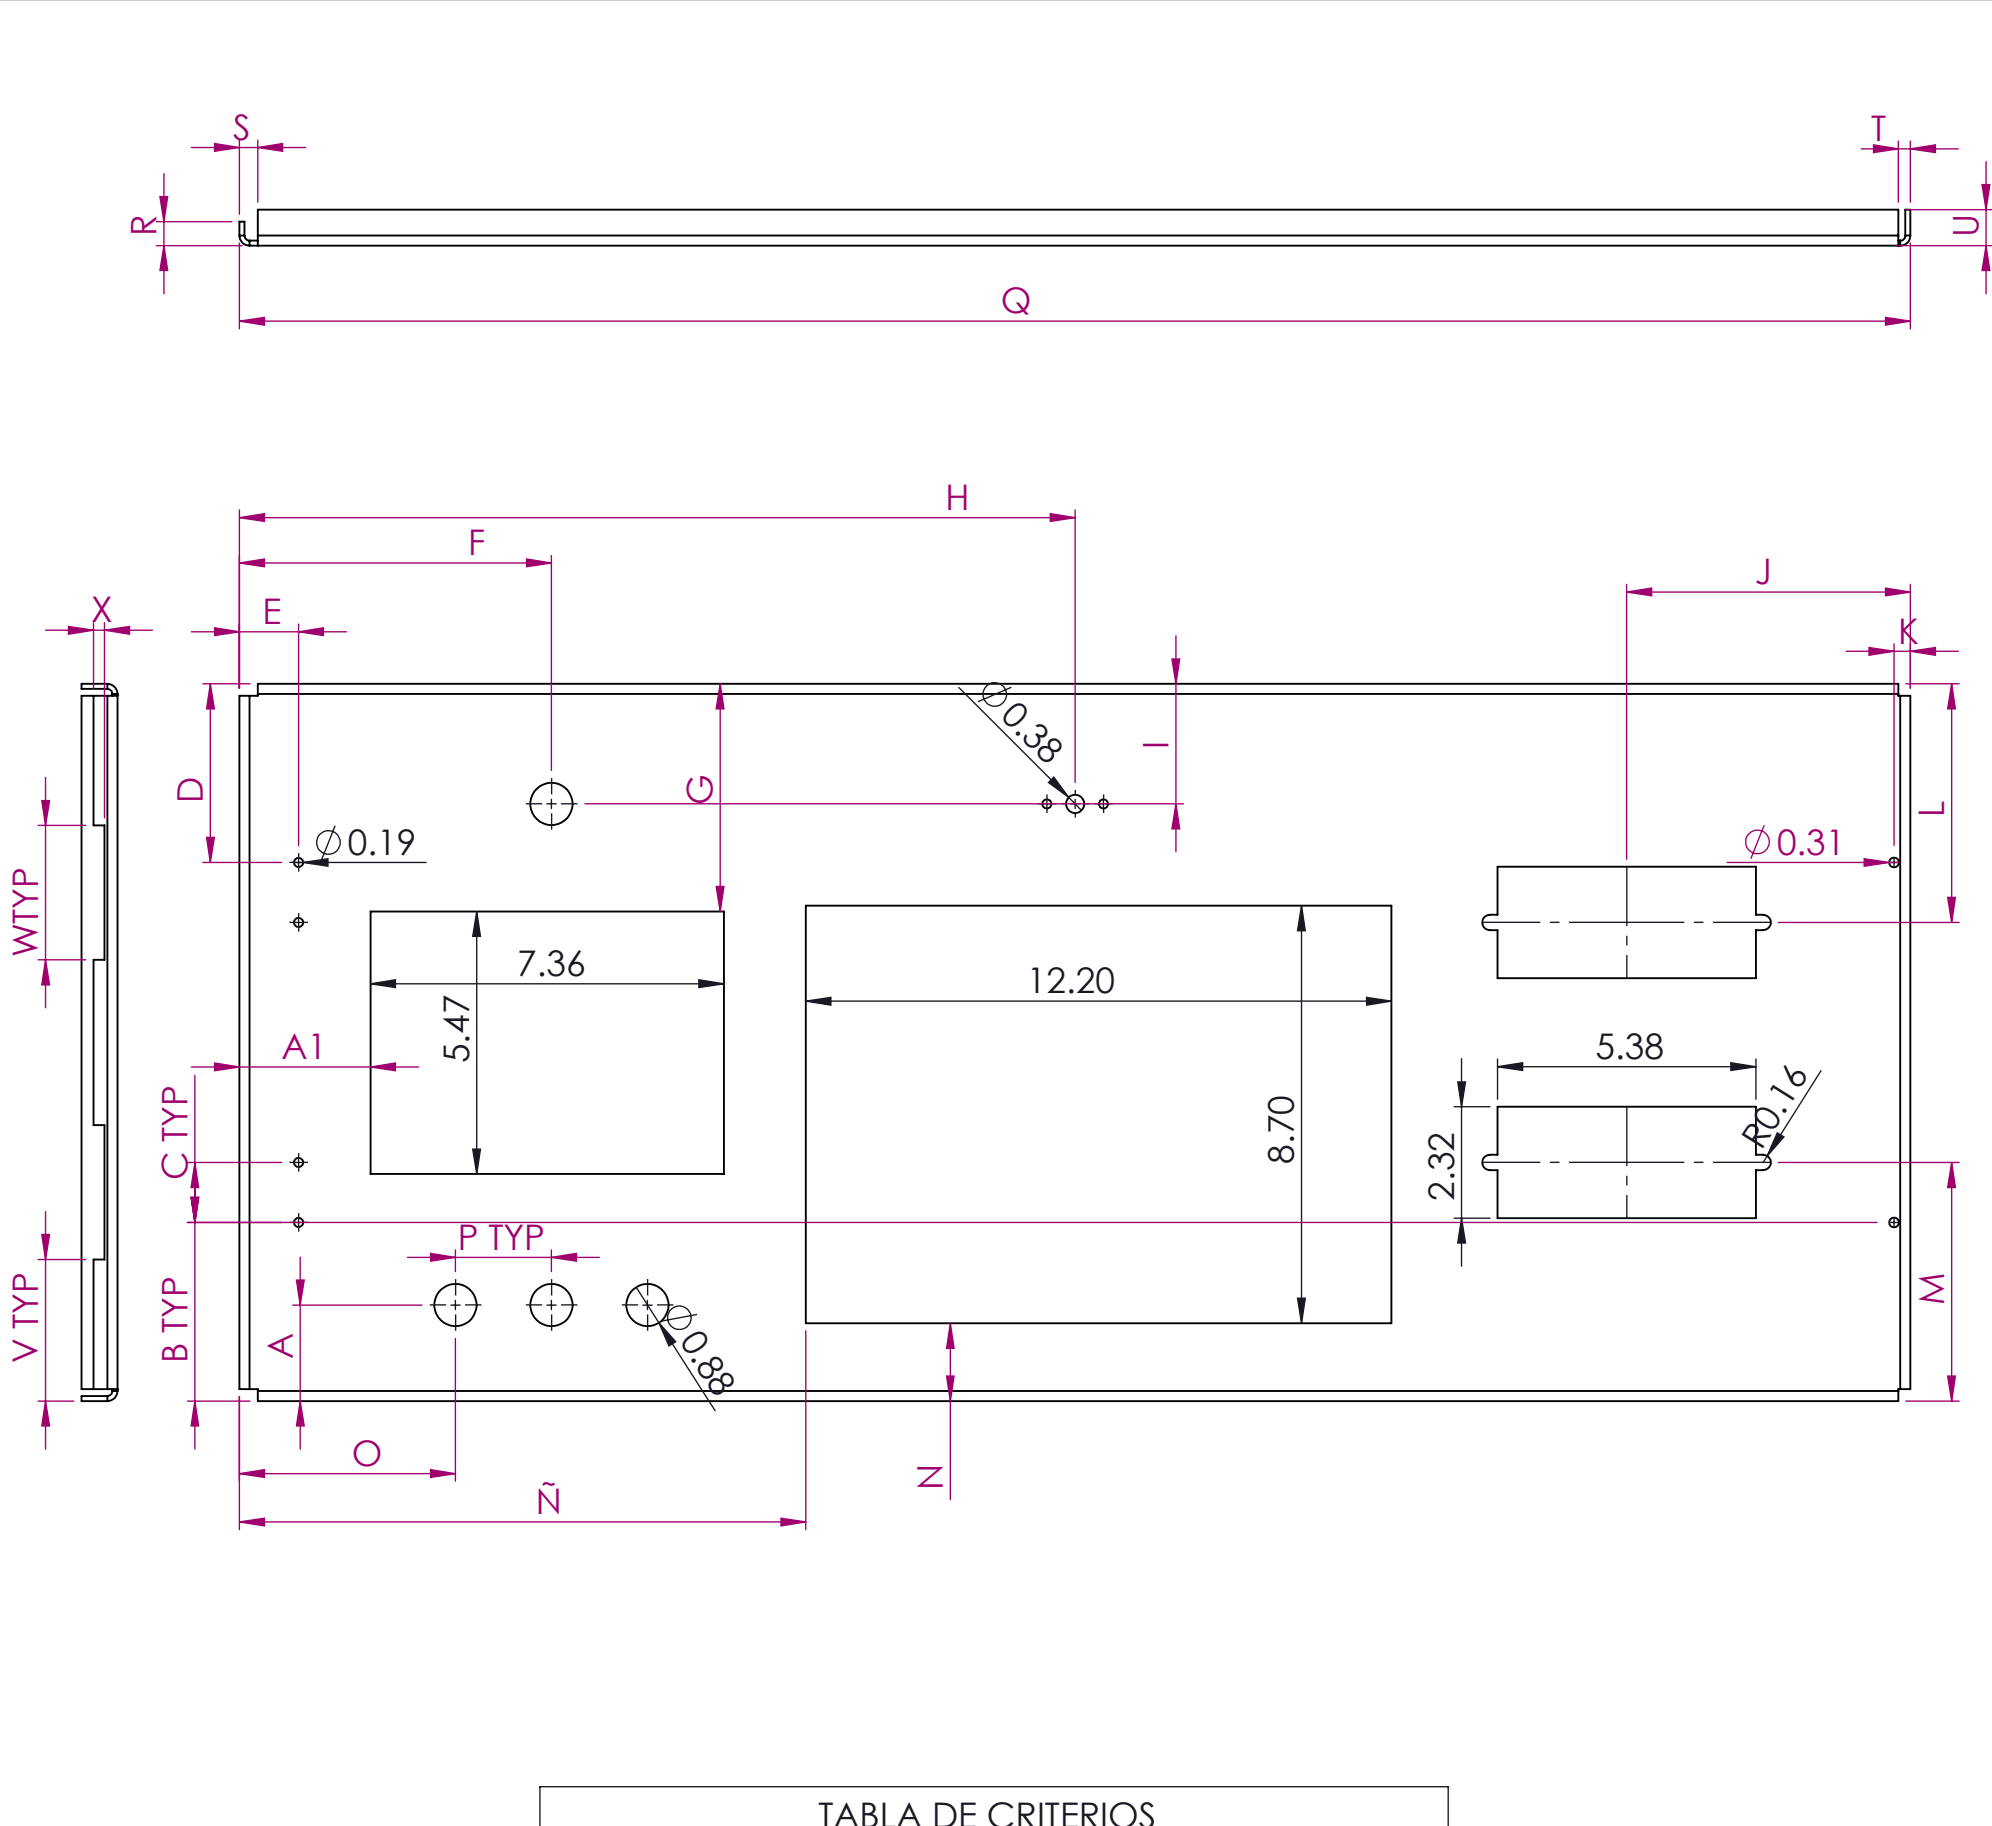

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	2.000	1.985	2.015				
B	3.720	3.705	3.735				
C	1.250	1.235	1.265				
D	3.720	3.705	3.735				
E	1.230	1.215	1.245				
F	6.500	6.485	6.515				
G	4.740	4.725	4.755				
H	17.410	17.395	17.425				
I	2.500	2.485	2.515				
J	5.910	5.895	5.925				
K	0.340	0.325	0.355				
L	4.970	4.955	4.985				
M	4.970	4.955	4.985				
N	1.620	1.605	1.635				
Ñ	11.800	11.785	11.815				
O	4.500	4.485	4.515				
P	2.000	1.985	2.015				
Q	34.810	34.795	34.825				
R	0.500	0.485	0.515				
S	0.380	0.365	0.395				
T	0.250	0.235	0.265				
U	0.750	0.735	0.765				
V	2.950	2.935	2.965				
W	2.800	2.785	2.815				
X	0.230	0.215	0.245				
Y	0.250	0.235	0.265				
Z	19.940	19.925	19.955				
A1	2.730	2.715	2.745				

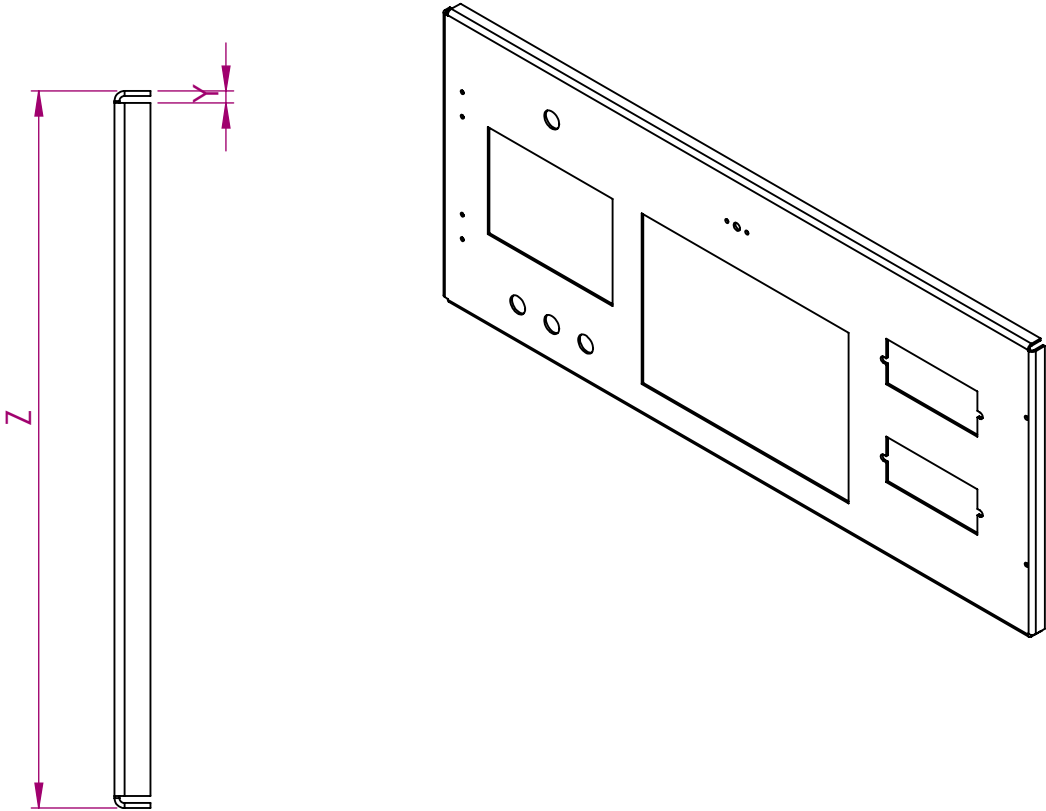


TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	16 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



38W X 15H INSTRUMENT DOOR				Dwn No: PP22114-06-(12gacr ANSI-61) - K48 - V1-R0		Rev: 00
Dwn: JRFM	21/07/2026	Chk: JRFM	21/07/2026	Apvd: JRFM	21/07/2026	Sht 1 of 1