

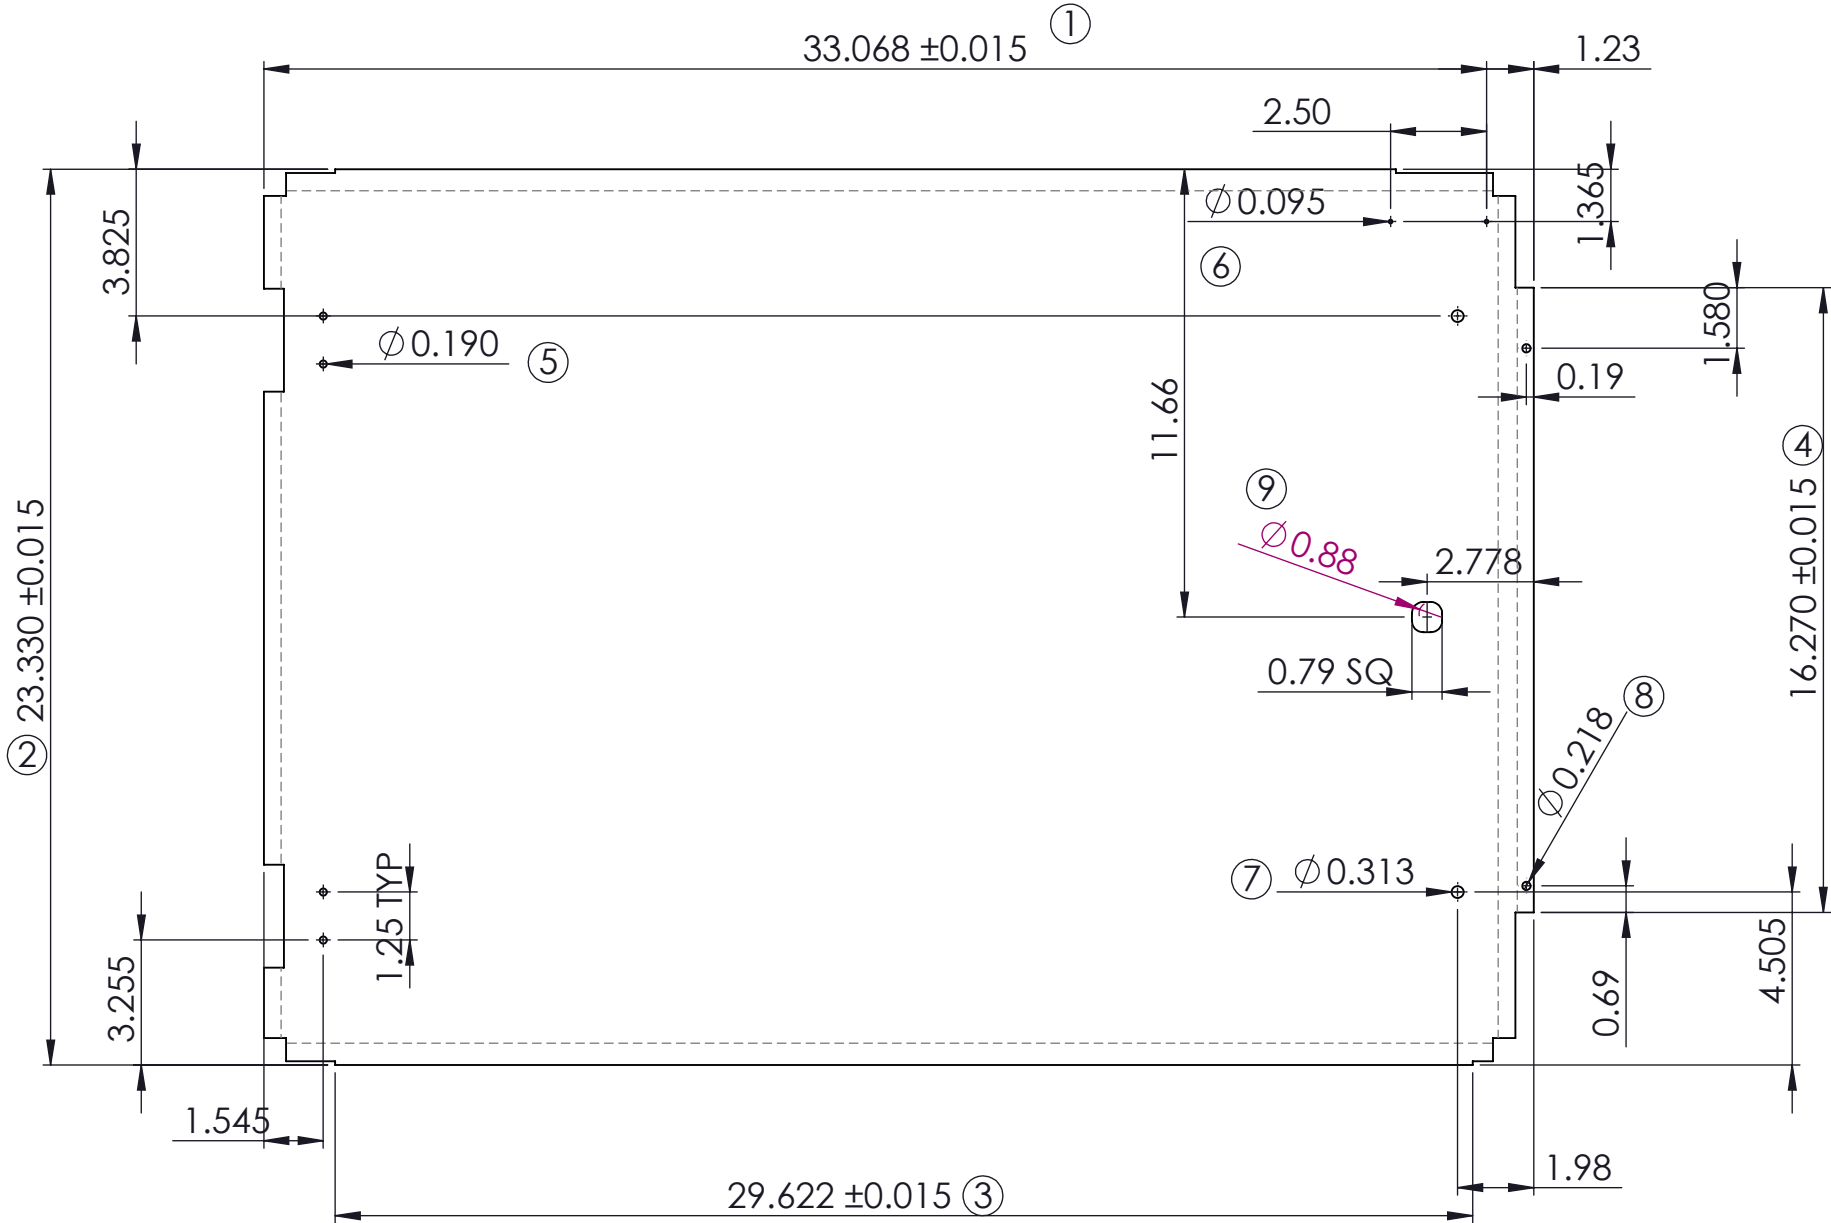



No	Resp	Dim	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
1	LASER	33.068	33.053	33.083				
2	LASER	23.330	23.315	23.345				
3	LASER	29.622	29.607	29.637				
4	LASER	16.270	16.255	16.285				
5	LASER	0.190	0.175	0.205				
6	LASER	0.095	0.080	0.110				
7	LASER	0.313	0.298	0.328				
8	LASER	0.218	0.203	0.233				
9	LASER	0.880	0.865	0.895				

REVISION	NOMBRE DFX	Fecha	Factor K	Ancho	Largo	Espesor
R0	PP8655-(12gacr ANSI-61) - K48 - V1-R0	28/07/2026	0.48	23.330	33.068	0.105

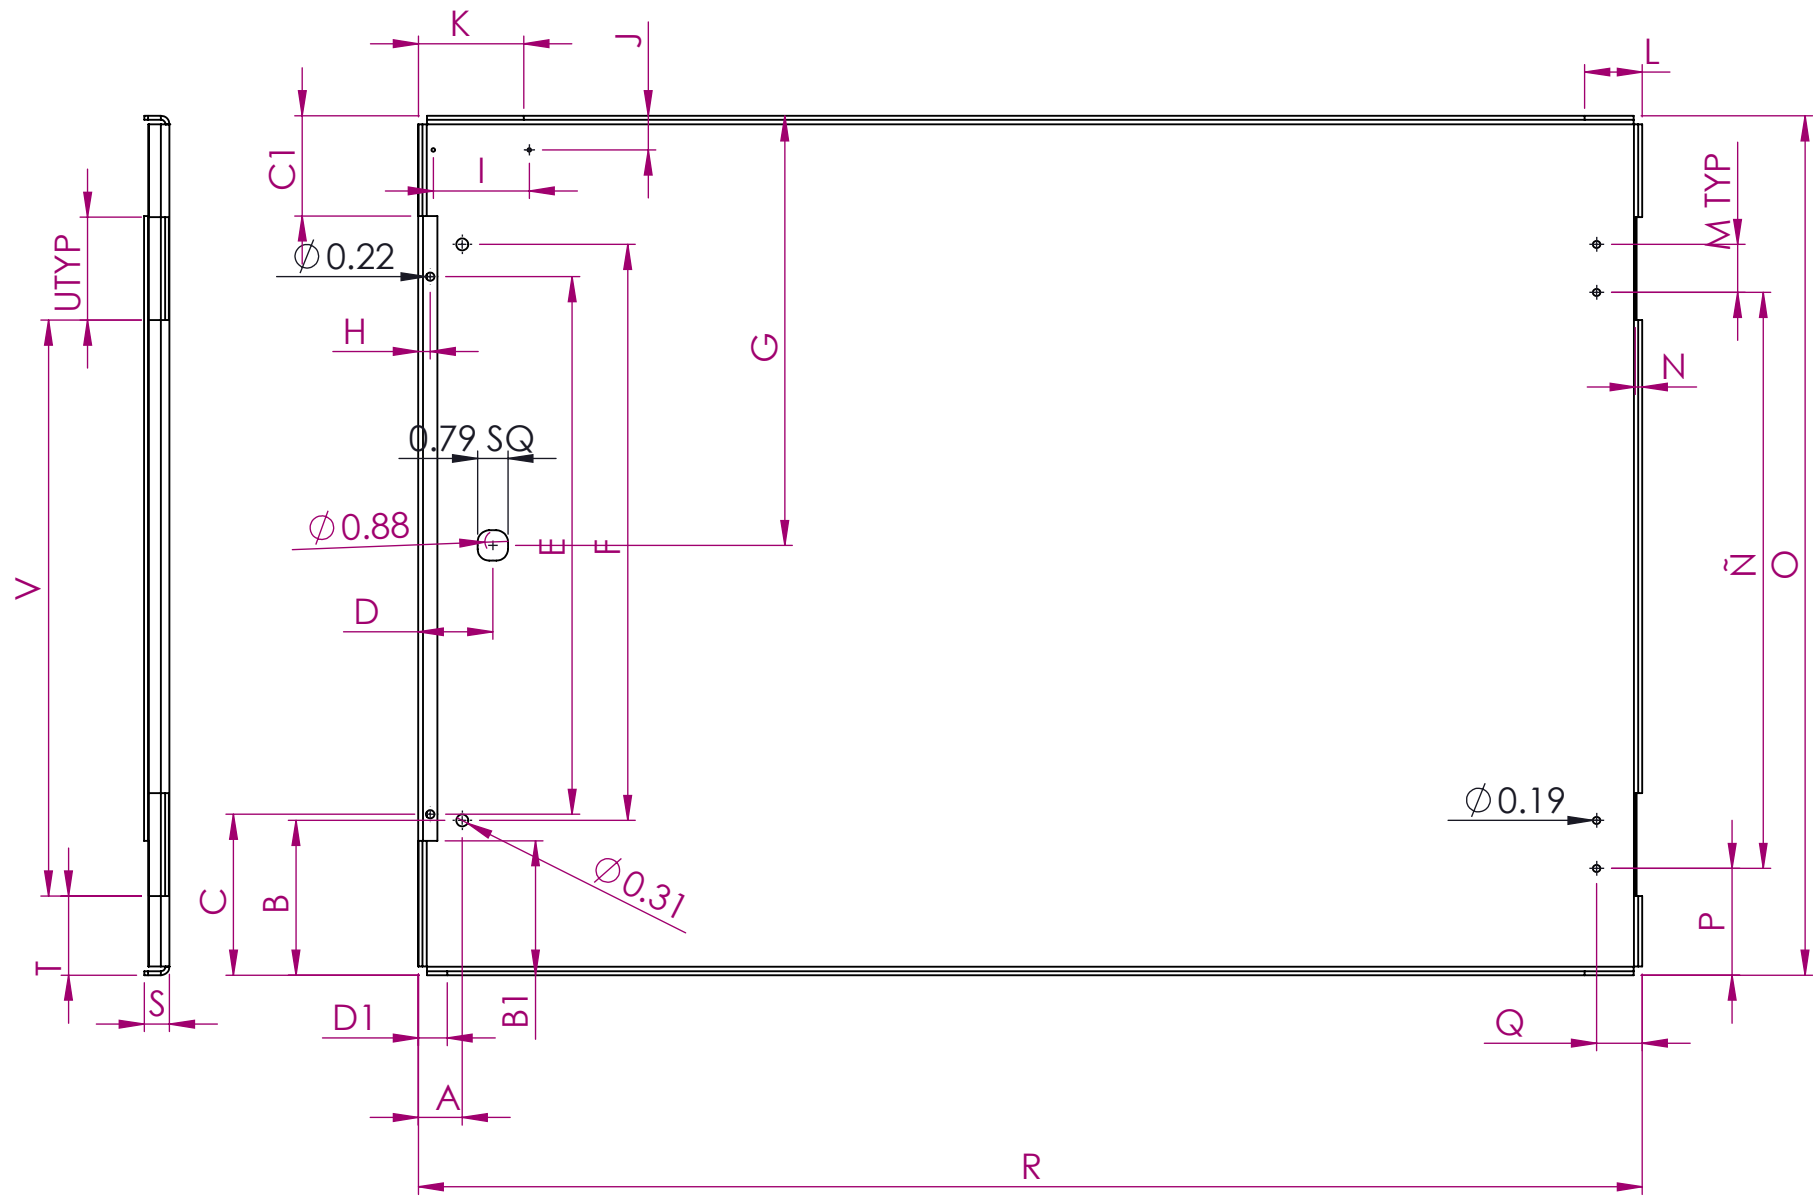

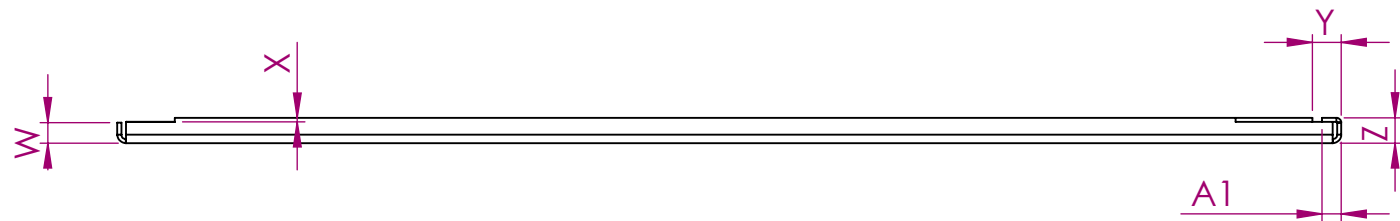

MEDIDA	DIMENSION	L.I.	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	1.144	1.129	1.159				
B	4.031	4.016	4.046				
C	4.190	4.175	4.205				
D	1.940	1.925	1.955				
E	14.000	13.985	14.015				
F	15.000	14.985	15.015				
G	11.190	11.175	11.205				
H	0.310	0.295	0.325				
I	2.500	2.485	2.515				
J	0.890	0.875	0.905				
K	2.750	2.735	2.765				
L	1.500	1.485	1.515				
M	1.250	1.235	1.265				
N	0.170	0.155	0.185				
Ñ	15.000	14.985	15.015				
O	22.375	22.360	22.390				
P	2.780	2.765	2.795				
Q	1.190	1.175	1.205				
R	31.875	31.860	31.890				
S	0.660	0.645	0.675				
T	2.062	2.047	2.077				
U	2.680	2.665	2.695				
V	15.000	14.985	15.015				
W	0.535	0.520	0.550				
X	0.100	0.085	0.115				
Y	0.750	0.735	0.765				
Z	0.650	0.635	0.665				
A1	0.500	0.485	0.515				
B1	3.500	3.485	3.515				
C1	2.610	2.595	2.625				
D1	0.750	0.735	0.765				

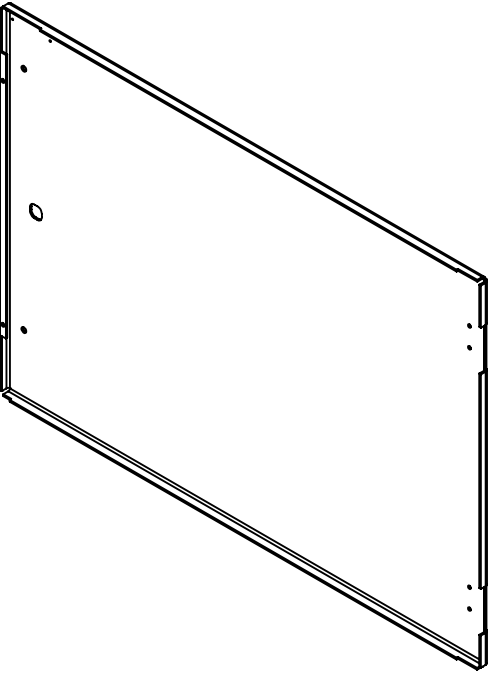

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



22.5H AUX DOOR W/SCREWS			
Dwn: JRFM	28/07/2026	Chk: JRFM	28/07/2026

Dwn No: PP8655-(12gacr ANSI-61) - K48 - V1-R0		Rev: 01
Apvd: JRFM	28/07/2026	Sht 1 of 1