

4000 Aurora Ave N, Suites 5 & 6, Seattle, WA 98103 (206) 905 9477 8am to 5pm Pacific sales@woodruffscientific.com


http://www.woodruffscientific.com

Model number(s): AC-[16,32,64]

Descriptive name: Bank with spark-gap switch, 12kV, 4uF caps, circular arrangement

Features:

- Copper (-ve) and aluminum buswork (grd)
- 12kV insulation rating
- Built for stand-alone applications
- Spark gaps rated to 6 Coulombs
- Easy maintenance / 360° access

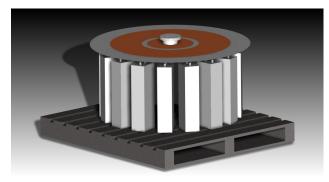

Operational ratings:

Parameter \ uF	16	32	64
Max Current (500us)	250kA	250kA	250kA*
Max Voltage	12kV	12kV	12kV

^{*} set by sparkgap switch

Operational characteristics:

Parameter \ uF	16	32	64
Inductance	<1uF	<1uF	<1uF
V_switch	130-370V	130-370V	130-370V

Options:

Enclosures (Pallet standard / Rack / Partial / Full)
Harnessing (RG8 cabling standard / Busbars / Other)

Switching (SGs standard / Ignitrons)

Charging supplies (12kV -ve standard)
Controls (Labview control system)

Sensors (Voltage dividers / Rogowskis / Thermal / Mechanical / Optical)




4000 Aurora Ave N, Suites 5 & 6, Seattle, WA 98103 (206) 905 9477 8am to 5pm Pacific sales@woodruffscientific.com http://www.woodruffscientific.com

Model number(s): AC-[16,32,64]

Descriptive name: Bank with spark-gap switch, 12kV, 4uF caps, circular arrangement

Engineering Drawing

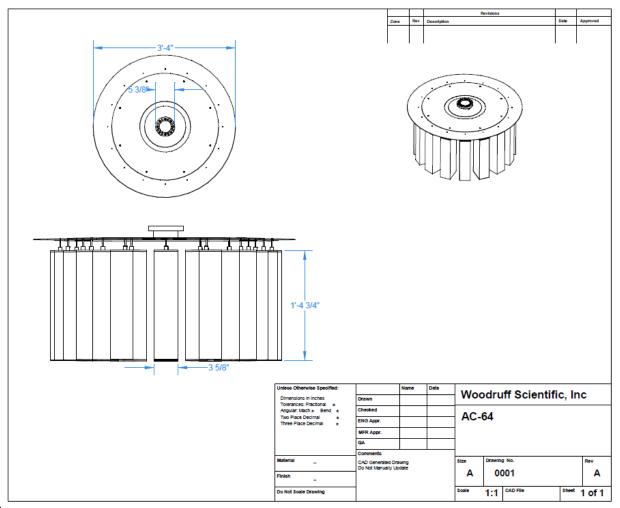


Notes:

- 1. Mounting holes are sized as a clearance fit for a 1/4-20 screw
- 2. For higher power operation in steady state, attach coils to suitable heat sink
- 3. Electrical connections to the coil are made with 1/4" lugs, soldered to coil winding



4000 Aurora Ave N, Suites 5 & 6, Seattle, WA 98103 (206) 905 9477 8am to 5pm Pacific sales@woodruffscientific.com http://www.woodruffscientific.com

Model number(s): AC-[16,32,64] **Descriptive name:** Bank with spark-gap switch, 12kV, 4uF caps, circular arrangement

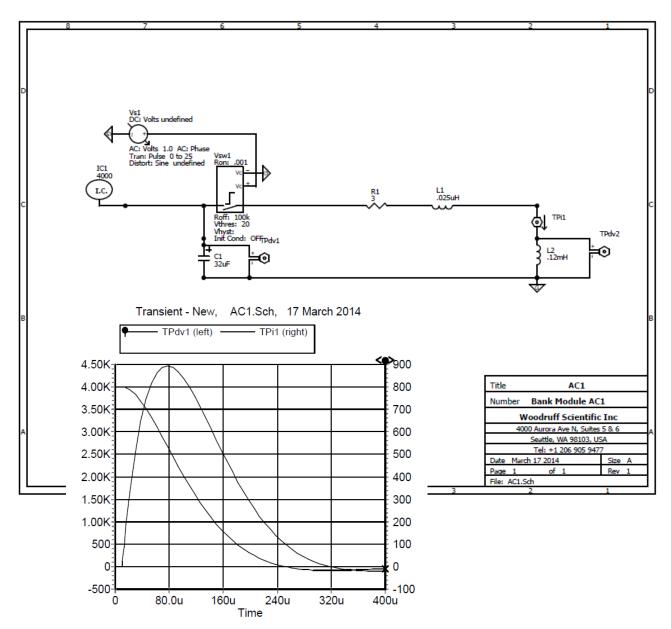



4000 Aurora Ave N, Suites 5 & 6, Seattle, WA 98103 (206) 905 9477 8am to 5pm Pacific sales@woodruffscientific.com http://www.woodruffscientific.com

Model number(s): AC-[16,32,64]

Descriptive name: Bank with spark-gap switch, 12kV, 4uF caps, circular arrangement

