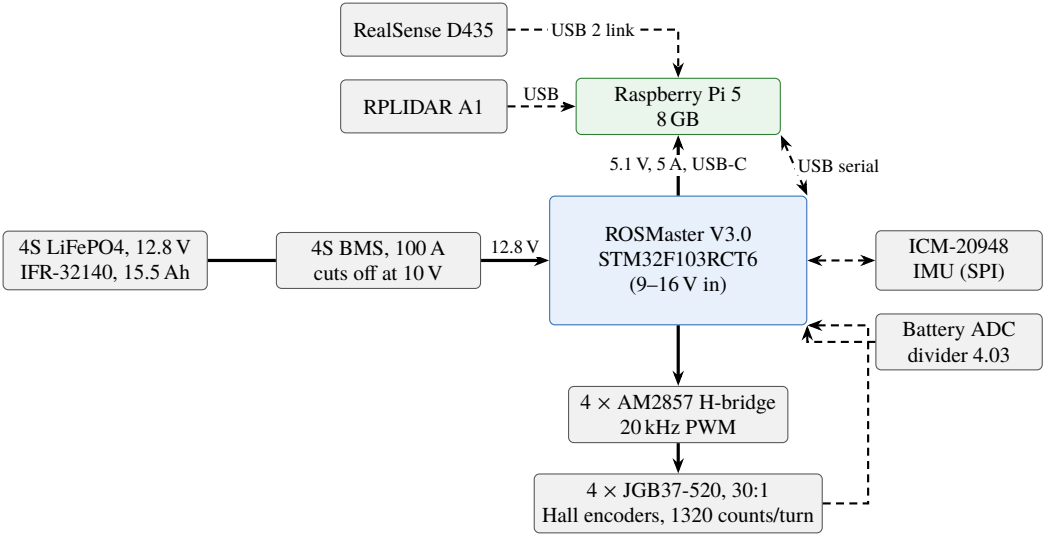
RealSense D435
USB 2 link
RPLIDAR A1
USB
Raspberry Pi 5
8 GB
5.1 V, 5 A, USB-C
USB serial
4S LiFePO4, 12.8 V
IFR-32140, 15.5 Ah
4S BMS, 100 A
cuts off at 10 V
12.8 V
ROSMaster V3.0
STM32F103RCT6
(9–16 V in)
ICM-20948
IMU (SPI)
Battery ADC
divider 4.03
4 × AM2857 H-bridge
20 kHz PWM
4 × JGB37-520, 30:1
Hall encoders, 1320 counts/turn