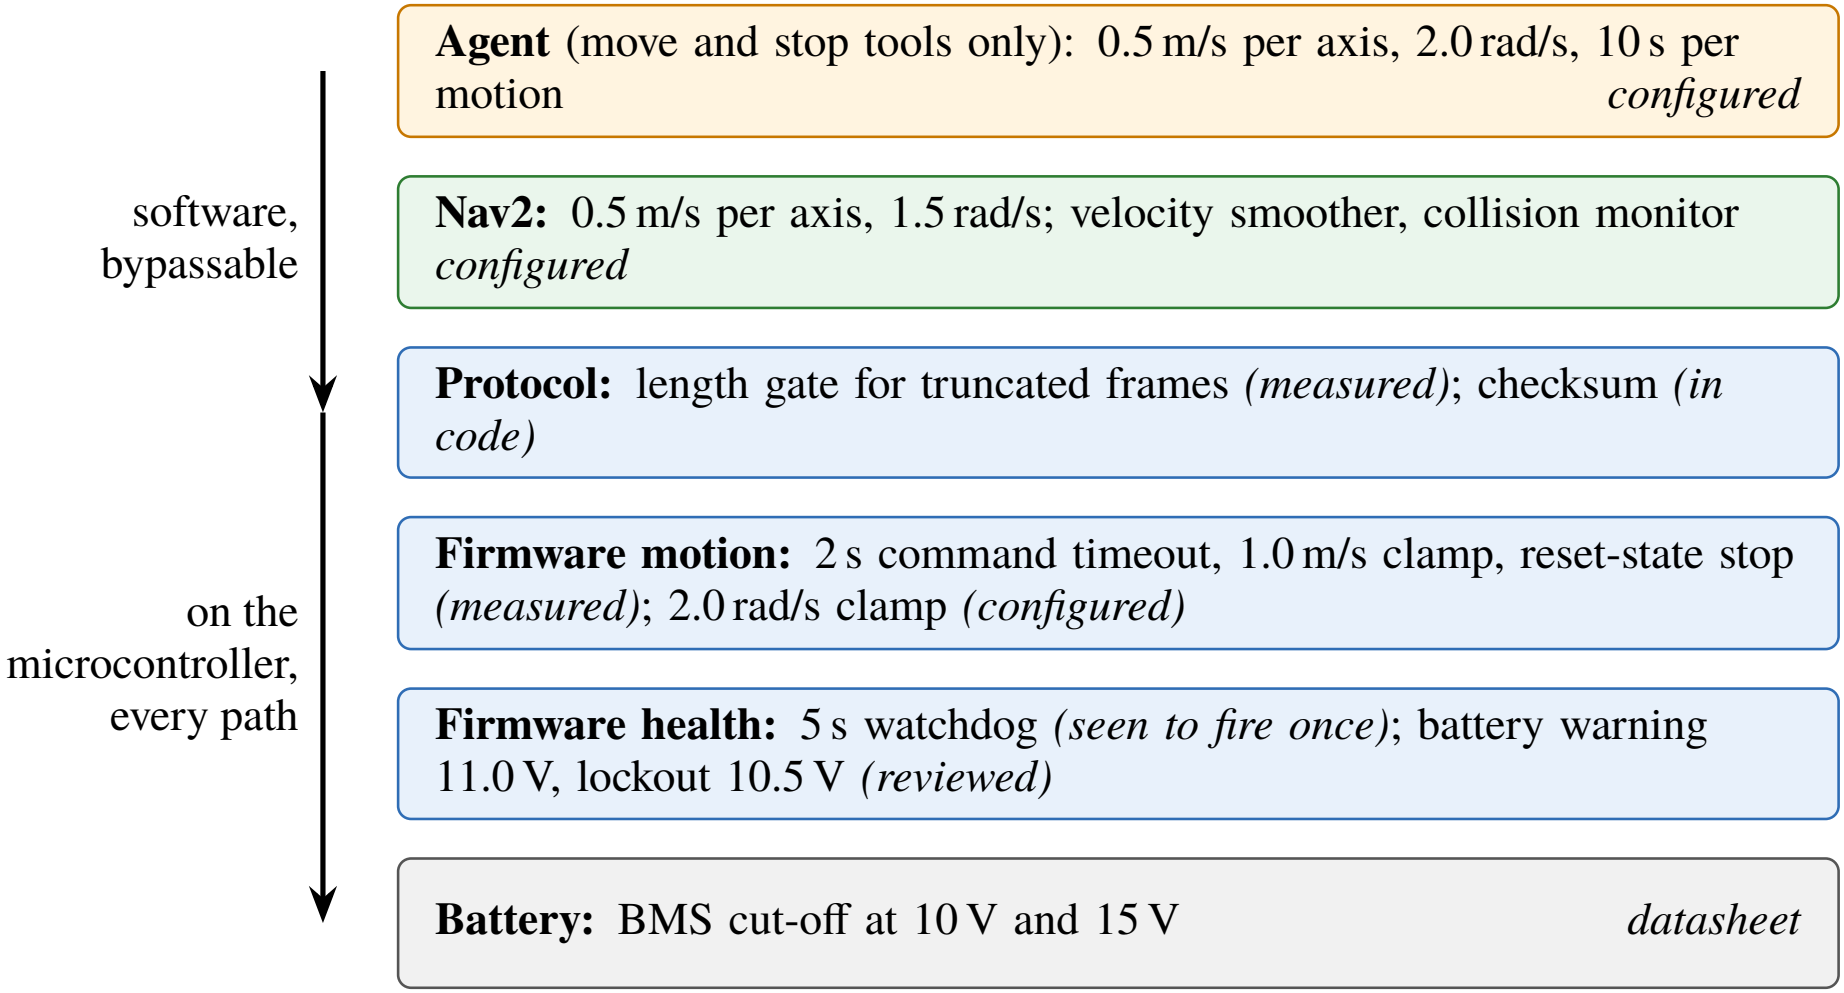
Agent (move and stop tools only): 0.5 m/s per axis, 2.0 rad/s, 10 s per motion
configured
software, bypassable
Nav2: 0.5 m/s per axis, 1.5 rad/s; velocity smoother, collision monitor
configured
Protocol: length gate for truncated frames (measured); checksum (in code)
Firmware motion: 2 s command timeout, 1.0 m/s clamp, reset-state stop (measured); 2.0 rad/s clamp (configured)
on the microcontroller, every path
Firmware health: 5 s watchdog (seen to fire once); battery warning 11.0 V, lockout 10.5 V (reviewed)
Battery: BMS cut-off at 10 V and 15 V
datasheet