



	1	2	3	4	5	6	7	8	
A	Revision History: Rev. C: C1: 1. Baseline is B541 Rev. B3 2. Dimentions are made as per requirement 3. USB & SD are made available 4. Removed JTAG & UART connections 5. Single RGB LEDs & Red power indicator 6. USB protections U1 are provided C2: 1. Switches footprints are corrected C3: 1. IO0 taken on header pins & default keep as pulled up 2. SW2 Connected to IO38								A
B									B
C									C
D									D
	1	2	3	4	5	6	7	8	


ESP32 PERIPHERALS

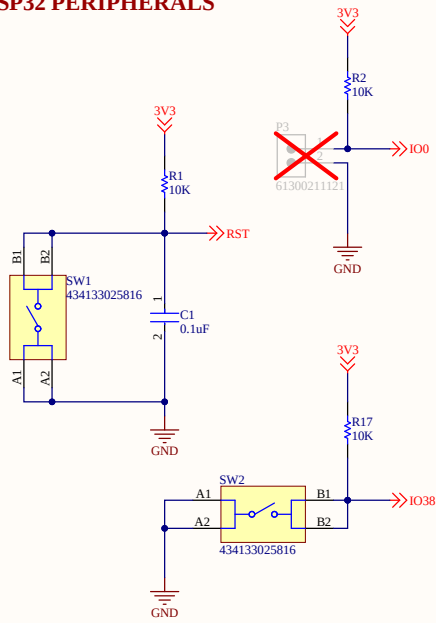


ESP32-S3 CONTROLLER

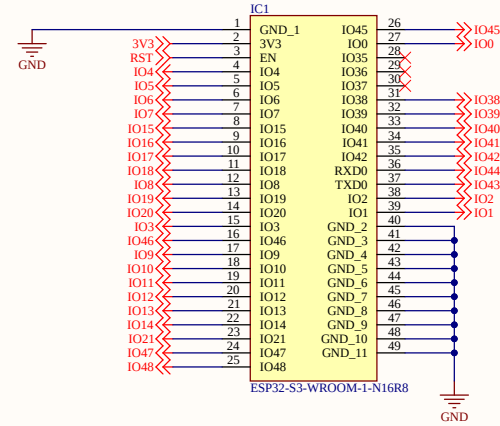


SD CARD

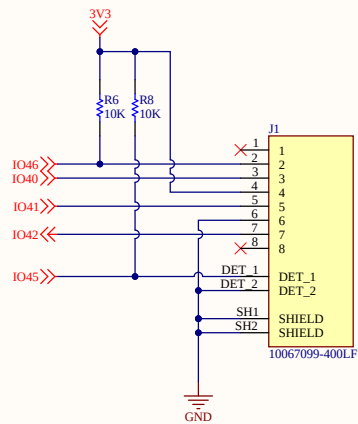


USB CONNECTOR

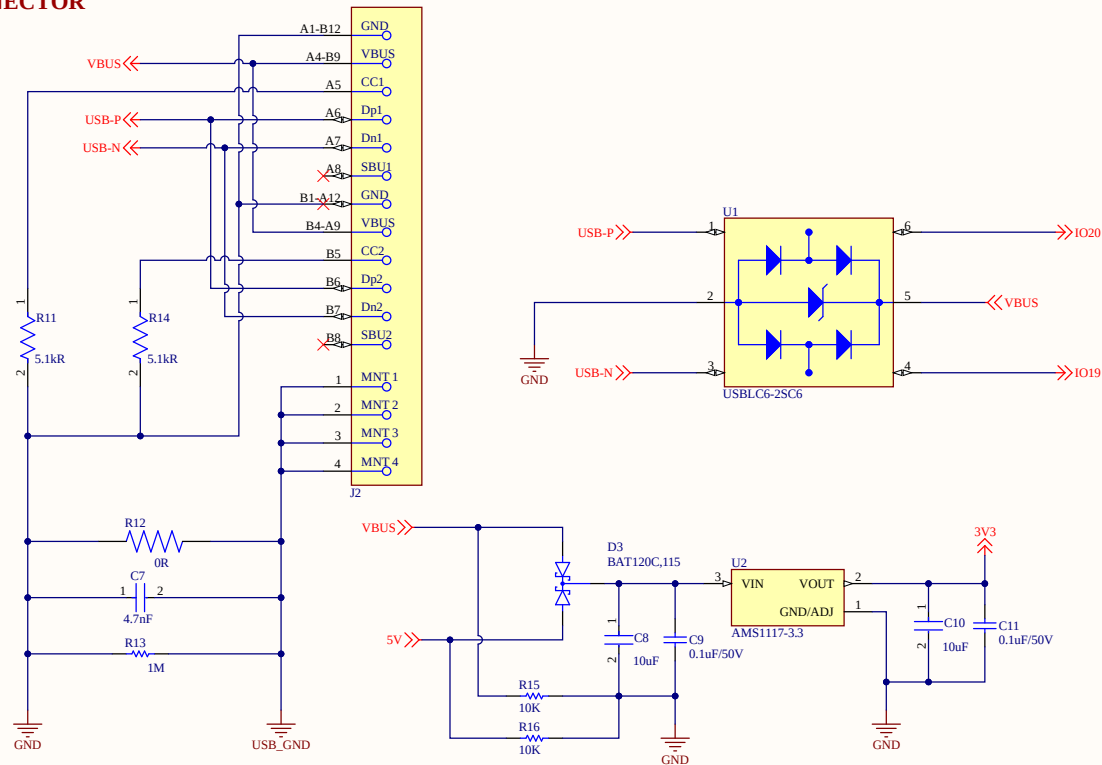

RTC

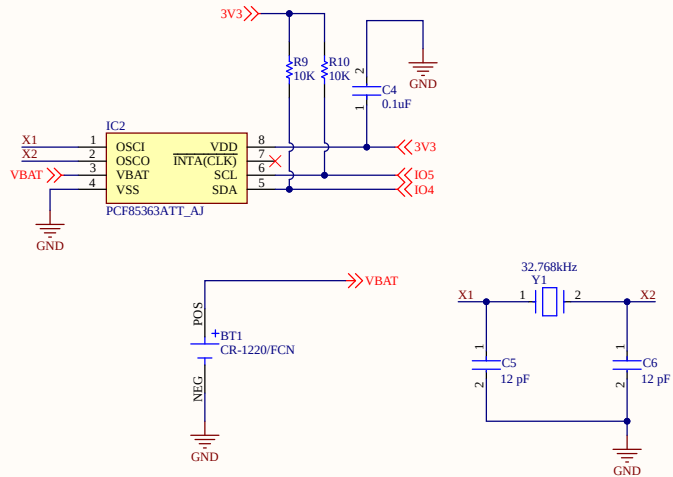

MEETING CONNECTOR

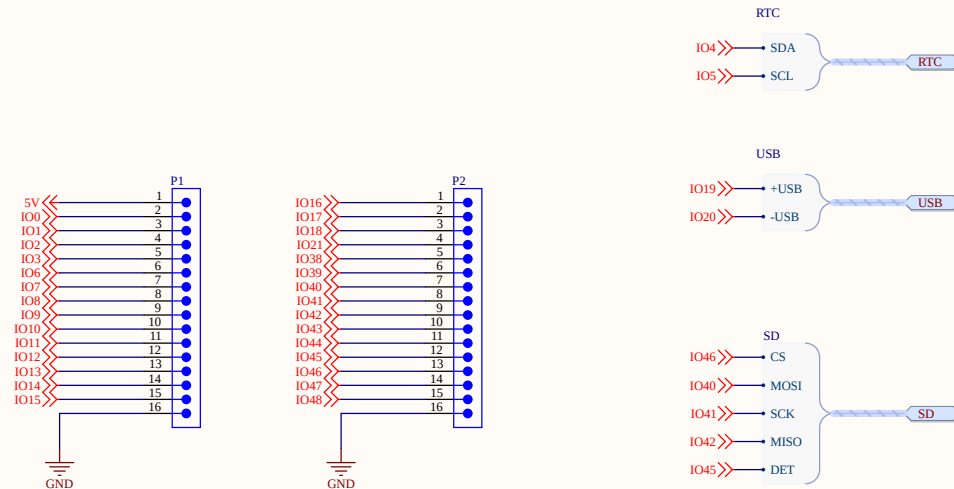

SUPPLY INDICATOR

