


POWER AND BATTERY GAUGE






U2 pins: 1 Vcc, 2 GND, 3 SCL, 4 SDA, 5 Vin−, 6 Vin+
INA219 0x40, 0.1R shunt, high side. Vcc to 5V only.
No direct +9V_SW to VIN wire (bypasses shunt).

BATTERY DIVIDER (A1, FALLBACK)

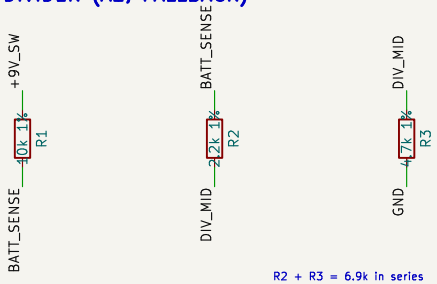

R2 + R3 = 6.9k in series


MICROPHONE (A0)

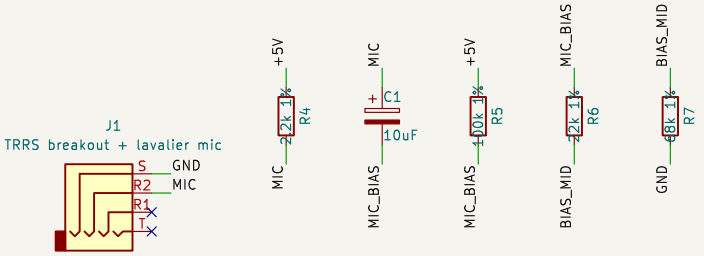


R6 + R7 = 90k in series

As built per protoboard notes: A0 on mic node (row 12). TO VERIFY vs. older sheet, which showed the 100k/90k divider biasing the mic.

CONTROLLER

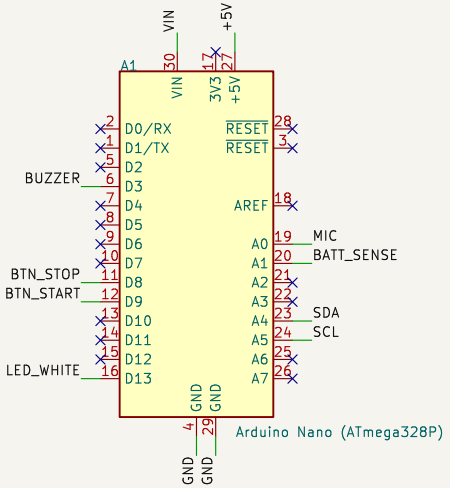


DISPLAY





U1 pins: 1 GND, 2 VCC, 3 SCL, 4 SDA. I2C 0x3C

Power flags




BUTTONS, BUZZER, LED





Buttons use the Nano internal pull-ups





TO VERIFY: built-in resistor (no resistor on the board)

DRAFT — items marked TO VERIFY need checking on a real unit
github.com/jfkure/shot-timer-mk1 — CERN-OHL-S-2.0
Matches firmware v1.7.5 and the protoboard build (INA219 added 10/16/2026)
Designer: Josue F. Kure
Huckleberry Innovations LLC

Sheet: /
File: shot-timer-mk1.kicad_sch

Title: Shot Timer Mk1 Schematic

Size: A4	Date: 2026-10-18	**Rev: 1.7.5**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1