


Cross Flow Turbines

[Cross flow turbines](#) use blades placed perpendicular to water flow either horizontally or vertically. These blades can look similar to that of a watermill, or have a helical structure. Helical structures have been developed and tested at nearly 30-meters long such as the TidGen from Ocean Renewable Power Company (linked below), with rotor diameters of 2.8 m long and rotation speeds of up to 40rpm. The movement of the blades with ocean currents and tides generate electricity. The blades can either be open, placed within a frame, or shrouded.

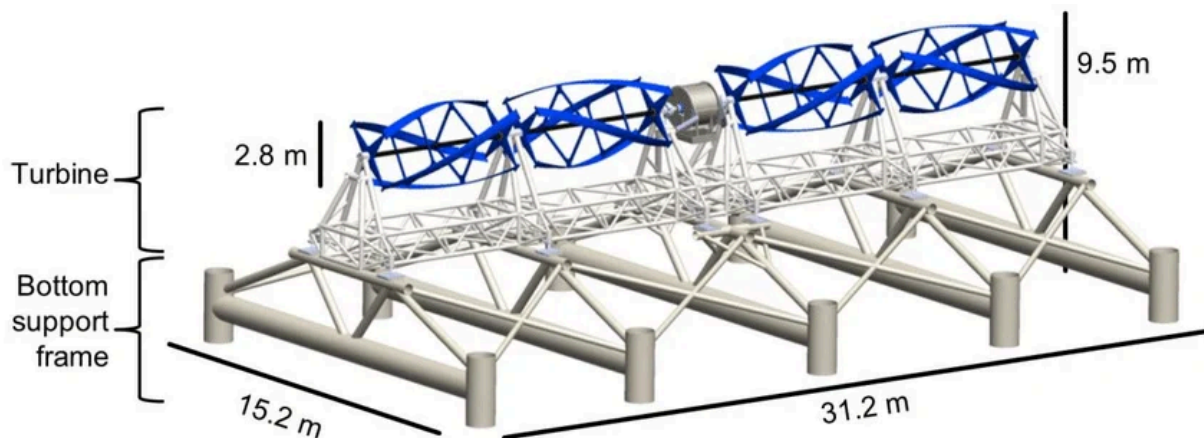

[TidGen](#) from Ocean Renewable Power Company


These devices are meant to be bottom mounted, attached to an existing structure, or mounted to a floating platform. Floating platforms can use single-point or multi-point mooring systems that are anchored to the ground and generally taut to keep the device in a rigid position within the water column.



Bottom-mounted [APL Turbine-Lander](#) by UW Applied Physics Laboratory



[Bottom-mounted H300](#) by Norwegian Ocean Power (reference the person in bottom right for scale)

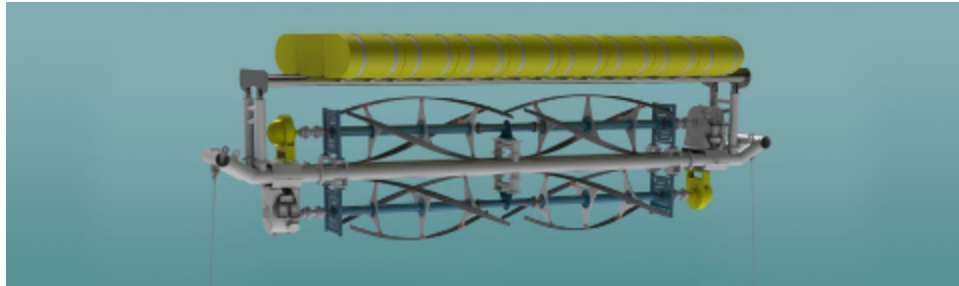

Submerged floating [TidGen 80 system](#) by Ocean Renewable Power Company using two-point taut mooring system.