TEST REPORT - MHITECH (LEVER SUS316)

Member IMC Group

Header

Customer No.	4898
Product Line	2 - IsoTurn
Industry	A1 - Cars
Test Date (DD/MM/YYYY)	10/03/2026
Test Reason	2 - Tool life
Stage	3 - Completed
Test Result	1 - Positive
Branch	SEOUL

Machine Information

Type	3 - Turning Machine
Brand & Model	XD 20J
Adaptation	
Max. RPM	

Cutting Condition

	Actual	Proposal 1	Proposal 2	Proposal 3	Proposal 4	Proposal 5
Manufacturer	218 - ZCC	1 - Iscar				
Tool	LOCAL 초경 보링툴	PICIN E05-T20-SCLCR-03				
Insert	LOCAL 초경 보링툴	CCGT 03X101-F1P				
Carbide Grade		IC908				
External Starting Diameter (mm)	8.02	8.02				
Internal Starting Diameter (mm)	4	4				
Cutting Speed (m/min)	**100**	**100**				
Spindle Speed (rpm)	4000	4000				
Feed (mm/rev)	0.10	0.10				
Depth of Cut (mm)	0.3	0.3				
Number of Passes	6	6				
Length of Cut (mm)						
Parts per Cutting Edge	1	2				
Wear	1 - Flank Wear	1 - Flank Wear				
Reason for Stopping the Test	2 - Wear	2 - Wear				
Remark	T.L 15,000EA 신품 3만원대 (재연마 3회)	T.L 15,000EA				

Material & Fixture

Part Name	GAMMA LEVER
Raw Material	14 - Pre-Machined
Group	13 - Stainless steel and cast steel
Std. Code	8 - JIS
Material	SUS 316
Hardness	
Unit	HRC
Rigidity	2 - Semi Stable

Test Result

1. 보링바 솔리드 타입 대비 원가절감 차원으로 PICCO INDEX 인서트 타입 적용 성공
2. 인서트 150EA / 홀더 10EA 발주
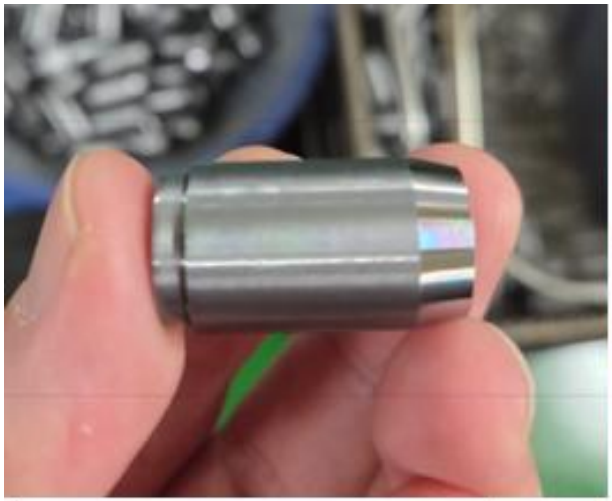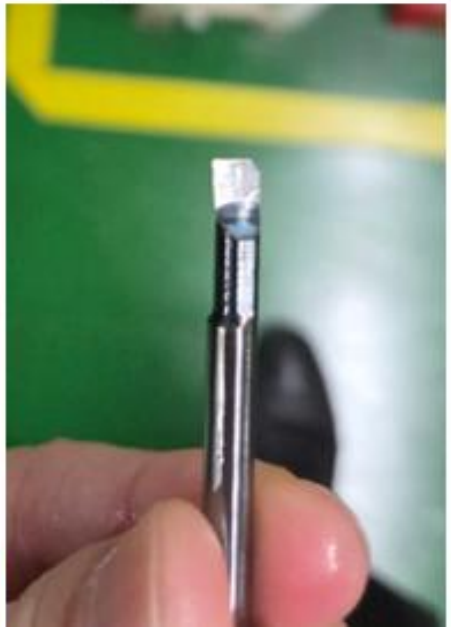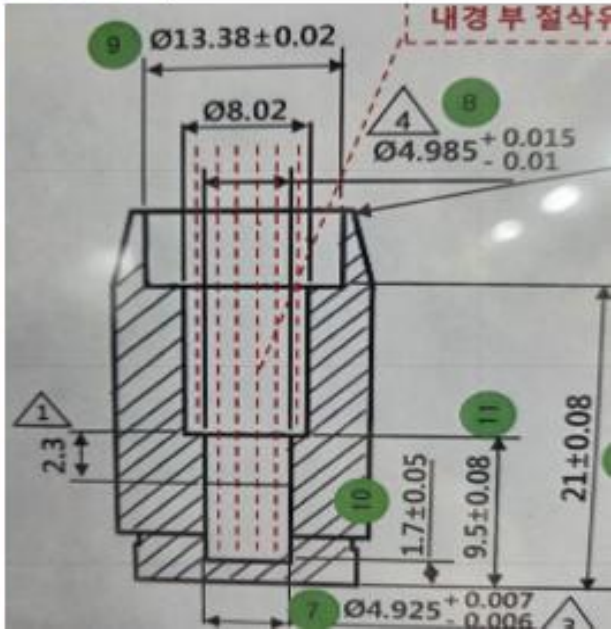
TEST REPORT - MHITECH (LEVER SUS316)