

1 2 3 4 5


A

A


(Mostly) SMD Version:
 C11, C12
 D11, D12 – (optional, untested)
 J1 – 3.5mm jack THT
 Q11, Q12 – SI2300 (2N7000 is untested)
 R11, R12
 S1, S2 – tack-soldered as SMD

Thru-hole (THT) Version:
 C1, C2
 D1, D2 – (optional, untested
 – see <https://telegra.ph/CW-key-05-25>)
 J1 – 3.5mm jack
 Q1, Q2 – 2N7000 (untested)
 R1, R2
 S1, S2 – tack-soldered as SMD

- H1
M2.2
- H2
M2.2

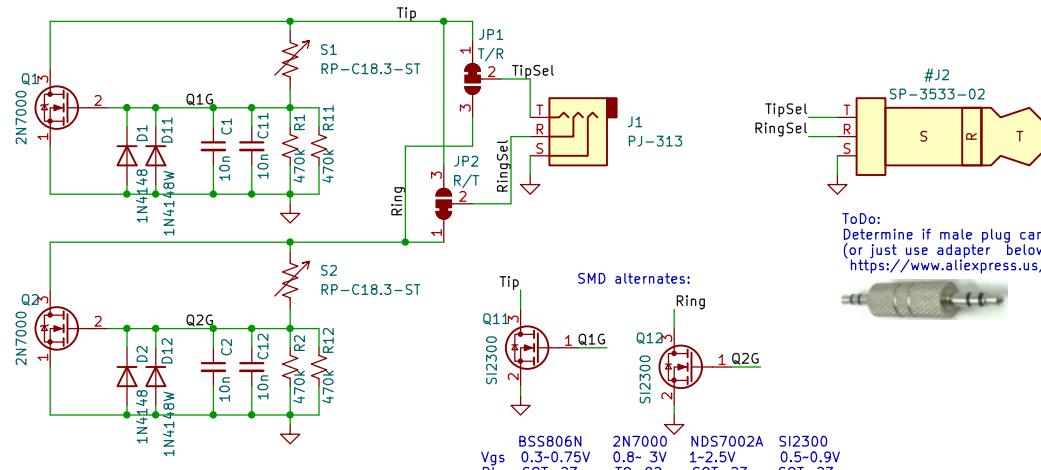

ToDo:
 Determine if male plug can fit on PCB,
 (or just use adapter below
<https://www.aliexpress.us/item/2255801052608069.html>)

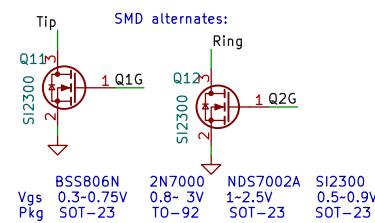

Based on VK3IL's 'Pressure Paddle':
<https://vk3il.net/pressure-paddle-v2/>
 and mods by UD6ARJMay, <https://telegra.ph/CW-key-05-25>
 Artwork (C)2025 AC8ES

Sheet: /
 File: fsrKeyer.kicad_sch

Title: Paddle Keyer

Size: USLetter Date: 2025-10-31

KiCad E.D.A. 9.0.6

Rev: 0.1

Id: 1/1

C

C

D

D

1 2 3 4 5