



Job Safety Training Outline

Built to align with DAFI 91-202 paragraph 14.1 requirements.

Unit: 402d MXSG

Work Center: MXSS ADMINISTRATION

Office Symbol: CL/CCQ

Supervisor: Randy L. Bowen, NH-03, Technical Advisor

Phone: 472-0253

Reviewer: Not entered

Review Date: Not entered

Effective Date: 2027-01-01

WORK CENTER OVERVIEW

1. **PURPOSE:** This outline aims to provide Initial/Annual Recurring Job Safety Training and Job Specific Training to employees assigned to the Warner Robins Air Logistics Complex (WR-ALC). Supervisors will provide and document safety training to all newly assigned employees on the hazards of their job before they start work and immediately when there is a change in equipment, processes, work environment, or safety, fire, and health requirements. The supervisor shall cover all aspects of workplace safety with respect to physical safety, fire safety, and health hazards. This JSTO has two sections; Mandatory Items and Shop Specific Items. Each area may be tailored to adequately address the specific concerns of an employee's workplace. Once training is completed, annotate training on the DAF Form 1286, Safety Education-Training Class Roster, or equivalent form IAW WR-ALCI 91-205, Documentation of Safety Training, Attachment 3. Route documentation to the squadron training office or group training manager for an update in Training Scheduling System Production Acceptance Certification (TSS/PAC). Supervisors will review and update the JSTO annually and when there is a change in equipment, processes, or safety, fire, and health requirements, and document the review on this page. Reference: DAFI 91-202, Chapter 14 and AFI 91-202 AFMCSUP, Chapter 14.

REQUIRED TRAINING TOPICS

Workplace Hazards

Personal Protective Equipment

Emergency Action and Fire Prevention

Reporting Unsafe Conditions

Reporting Mishaps and Occupational Injury/Illness

CA-10 and LS-201

DAF Traffic Safety Program


DAFVA 91-209

DAFSMS Responsibilities

- **Hazards and controls:** Address task hazards, environmental hazards, governing instructions, and hierarchy of controls including elimination, engineering, substitution, and administrative controls.
- **PPE:** Cover required protective equipment, wear/use procedures, cleaning, maintenance, storage, disposal, and supervisor notification concerns.
- **Emergency response:** Cover emergency action, fire prevention, alarms, AEDs, extinguishers, evacuation, shelter, active shooter response, and emergency contact procedures.
- **Reporting:** Explain unsafe condition reporting, injury/illness reporting, DAF Form 457, SAFEREP access, and anti-retaliation protections.
- **Program awareness:** Include CA-10 / LS-201 location, traffic safety program requirements, DAFVA 91-209 location, and DAFSMS responsibilities.

Hierarchy of Controls

Apply these controls from most effective to least effective when reducing workplace hazards under DAFI 91-202 paragraph 14.1.2.1.4.

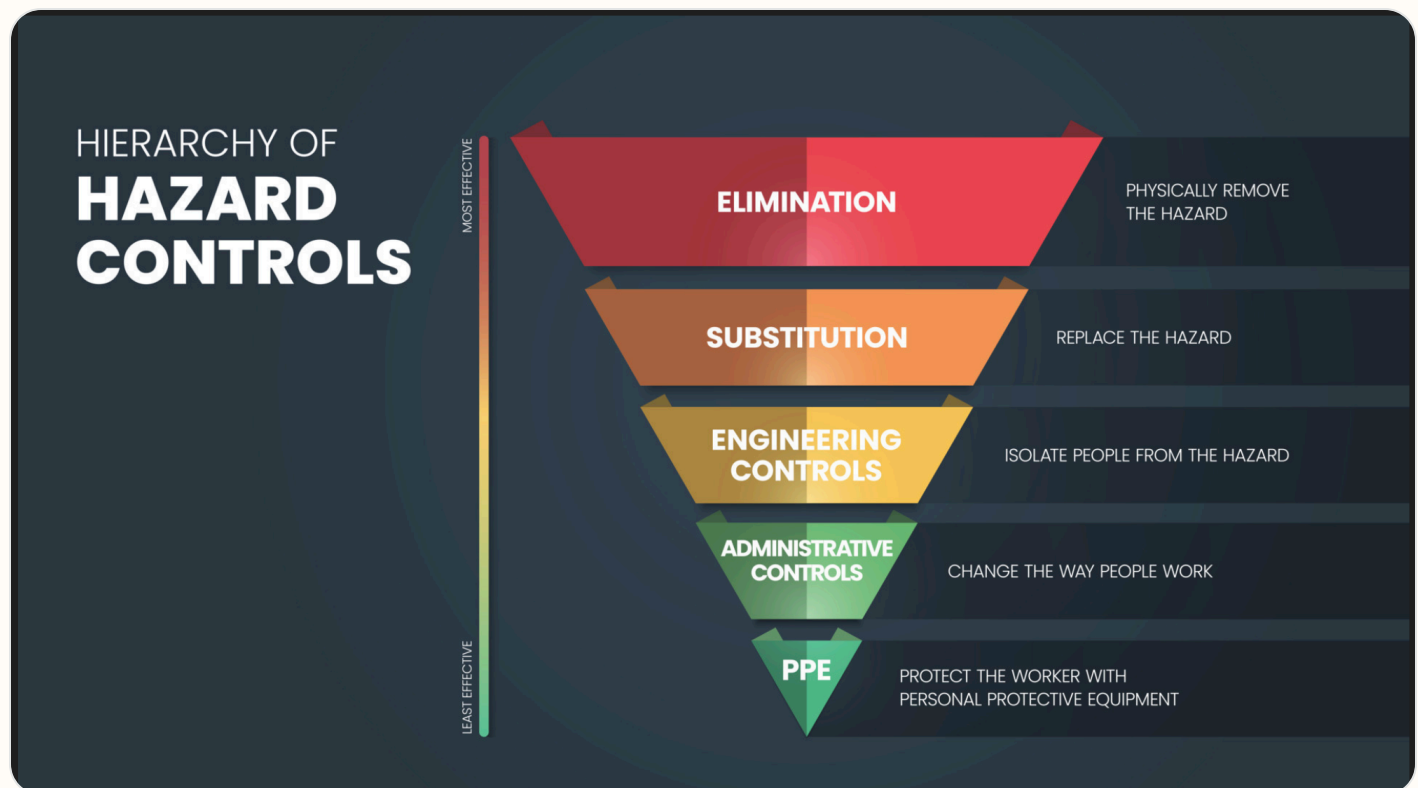

Use the highest level of control feasible first. PPE should protect workers only after elimination, substitution, engineering, and administrative controls have been considered.

Active Shooter Response

In the event of an active shooter, individuals should employ the **Avoid, Deny, Defend** response method. This strategy is adaptable to the specific situation and environment.

Responses to an Active Shooter include:

Avoid (RUN),

Deny (HIDE),

Defend (FIGHT)

Adapt your response to the weapons used:

Ricocheting bullets

Shrapnel and secondary missiles

Cover vs Concealment

An active shooter situation may be over within 15 minutes, before law enforcement arrives.

Avoid (Run): The first and preferred course of action is to evacuate the area if a safe route is available. Maintain awareness of your surroundings and have an escape route planned. Leave your belongings, evacuate regardless of whether others follow, and do not attempt to move wounded people. Once you have reached a safe location, call 911 and provide any information you have.

Deny (Hide): If you cannot evacuate, your next priority is to deny the attacker access to your location. This involves more than just hiding; it means securing your position. Lock and blockade doors with heavy furniture, turn off lights, silence your phone, and remain out of the shooter's view. Remember that concealment only hides you, while cover can offer protection from bullets.

Defend (Fight): As a last resort, when your life is in immediate danger, you must be prepared to defend yourself. Act aggressively and take action against the shooter. Improvise weapons from your surroundings and commit to your actions. Taking action may be risky, but it could be your best or only chance for survival.

When law enforcement arrives: Remain calm, follow all instructions, keep your hands visible with fingers spread, and be prepared to provide information about the shooter's location, number, and description.

DAFSMS FRAMEWORK

DAFSMS uses four pillars and the DAFSMS framework to structure the mishap prevention program through continuous improvement and the Plan-Do-Check-Act model.



Policy and Leadership

Provides the structure for a proactive mishap prevention program through policy, active leadership engagement, and clearly defined responsibilities at every level.

Risk Management

Integrates hazard identification, assessment, and control decisions into daily operations to reduce mishaps and strengthen safety culture.

Assurance

Uses evaluations, monitoring, reviews, and data to confirm the mishap prevention program is implemented and improving over time.

Promotion, Education, and Training

Ensures Airmen and Guardians receive safety awareness information, embedded training, effective risk controls, and active engagement in mishap prevention.

1. Purpose. DAFSMS utilizes the four pillars and the DAFSMS framework to structure the mishap prevention program. Activities associated with each pillar set policy, identify and mitigate hazards and risk, and reduce the occurrence and cost of injuries, illnesses, fatalities, and property damage through continuous improvement and the PDCA model.

2. Policy and Leadership. Safety policy provides the structure for a sound and proactive mishap prevention program. Active leadership involvement in implementation and execution is critical at all levels of command.

3. Risk Management. Ensure the RM process is fully integrated into all safety-related activities to enhance mishap prevention and sustain a proactive safety culture. Refer to DAFI 90-802 and DAFPAM 90-803 for additional detail.

4. Assurance. Safety assurance is how commanders determine whether mishap prevention elements are implemented and guides continuous improvement through evaluation, monitoring, and review.

5. Promotion, Education, and Training. Ensure Airmen and Guardians are provided safety awareness information, organizations have embedded ongoing training into the mishap prevention program, effective risk controls are implemented, and personnel remain actively engaged.

Report it on SAFEREP



HAZARDS ARE EVERYWHERE.



WHAT ARE **YOU** DOING TO
PREVENT INJURY OR DEATH?

More info about SAFEREP
www.safety.af.mil/home/saferep

SAFEREP is the Department of the Air Force's (DAF) premiere digital safety reporting tool and mobile app. It allows Airmen and Guardians to easily report hazardous conditions, near-misses, unintentional errors, or safety concerns across all disciplines, including workplace, traffic, industrial, flight, weapons, and space safety, directly from their devices anytime and anywhere.

Fully integrated with the Air Force Safety Automated System (AFSAS), it replaces the earlier Airman Safety App and serves as the DAF's only fully digital safety reporting avenue. Users simply answer a short series of questions to submit reports that reach the appropriate Major Command (MAJCOM) safety office quickly and efficiently.

Key Benefits for Job Safety Training:

- **Empowers everyone:** Turns every Airman or Guardian into a proactive sensor for hazard identification, encouraging a strong safety culture where people feel comfortable speaking up without barriers like paperwork or word-of-mouth delays.
- **Prevents mishaps:** Enables early mitigation of risks before they lead to incidents, capturing minor events and near-misses that offer the greatest prevention potential.
- **Simple and accessible:** Mobile-first design makes reporting fast, more efficient than traditional methods, and available on the spot through the app on Google Play and the Apple App Store.
- **Broad coverage and integration:** Supports multiple safety areas and includes specialized features such as Aviation Safety Action Program reporting, improving visibility, tracking, and overall risk management across the force.

This tool strengthens operational readiness by fostering a proactive, data-driven approach to safety. You can download it from the app stores or access it through the official SAFEREP site for more details.

SAFEREP portal: <https://saferep.safety.af.mil>

Learn more: <https://www.safety.af.mil/Home/SAFEREP/>

REPORTING UNSAFE EQUIPMENT, CONDITIONS, OR PROCEDURES

Employees must report unsafe equipment, conditions, or procedures to their supervisor immediately. This includes any hazard that could injure personnel, damage equipment, or create an unsafe work process.

Personnel must also be notified that unsafe conditions, work-related injuries, and illnesses may be reported **without fear of retaliation**. Immediate supervisor involvement remains the primary reporting path, with SAFEREP and formal hazard-report channels available when needed.

What To Report

- Unsafe equipment that is broken, damaged, unserviceable, or missing required guards or controls.
- Unsafe conditions or procedures that create a hazard to personnel, operations, or facilities.
- Work-related injuries, illnesses, near-misses, and hazards needing immediate attention.

Immediate Actions

- Notify the supervisor or responsible area lead immediately.
- If the hazard can be safely controlled, stop use and isolate the equipment or area until corrected.
- If the danger is imminent to life or health, evacuate the area and activate emergency response procedures.

Tag use examples: Use the appropriate danger, caution, out-of-order, or do-not-start tag to keep unsafe equipment out of service until the hazard has been corrected and the responsible supervisor authorizes return to use.



Escalation: If the issue cannot be resolved at the lowest level, elevate it through the unit safety representative, DAF Form 457 process, or SAFEREP as appropriate.

USE OF PORTABLE FIRE EXTINGUISHERS



Portable fire extinguishers are intended for small, incipient-stage fires only. Personnel should use an extinguisher only when they have been trained, the fire is small and contained, the correct extinguisher is available, and there is a clear evacuation path behind them.

Use the **PASS** method when operating a portable fire extinguisher: **P**ull the pin, **A**im at the base of the fire, **S**queeze the handle, and **S**weep side to side.

If the fire grows, smoke conditions worsen, or the extinguisher does not control the fire immediately, evacuate the area, activate the local emergency response process, and report the incident to emergency services and supervision.

WORK AREA HAZARD ANALYSIS

JHAs are conducted on all work processes, where appropriate, to identify potential hazards, determine appropriate Personal Protective Equipment (PPE) and include preventative measures in procedures to

mitigate hazards. Part of the JHA process overlaps Bioenvironmental (BE) efforts to link tasks to hazards and identifying Occupational and Environmental Health PPE requirements. The JHA shall involve BE to avoid duplication of effort and to ensure proper awareness of process changes. Note: A JHA is not required when existing guidance adequately ensures all safety requirements of an operation or process. Hazardous Noise: Some tools and equipment used to perform assigned tasks generate hazardous noise. Employees exposed to high noise levels will familiarize themselves with the damaging effects that high noise levels can cause to the human body and wear the proper ear protection to prevent damage. Hearing protection is required in all noise hazard areas and will be worn when using equipment such as band saws, sanders, pneumatic grinders, pneumatic drills, and other noise-producing tools and powered equipment.

Handling of Hazardous Chemicals/Waste: PPE will be used while handling all hazardous chemicals, including adhesives, primers, paints, methylene chloride, fillers, glues, composites, and sealants in accordance with the appropriate Safety Data Sheet (SDS). Adequate ventilation may be required while handling chemicals. Employees shall read and understand the appropriate and most current SDS and work center HRA before handling any chemical. Employees may obtain SDSs from their supervisor, the pharmacy from which they received the chemicals, or online. All employees will follow proper disposal procedures.

Lifting Heavy Objects: Use mechanical lifting devices to move heavy objects when possible. Always use proper posture when lifting any heavy or bulky object. Always bend at the knees and keep a straight back. Place feet close to the item and apart to maintain balance. Use team lifting when items are too heavy for one person or when items are lifted from an awkward position or location. Always watch for pinch points and be certain to wear proper hand protection. There are three basic methods of lifting, straight back with bent knees, freestyle, and kinetic. Each has advantages and limitations. The kinetic method is the most widely accepted and taught because it provides more stability for the worker while reducing the load on the back muscles and intervertebral disk. Safe lifting training is an annual training requirement. The supervisor should brief the following instructions on how to lift correctly:

- Feet Position: Place feet far enough apart for balance, with one foot to the rear of the object and the other foot slightly ahead of the other and to the side of the object.

- Body Position: Crouch close to the load. Stay close to the load to minimize strain on the lower back. Before beginning the lift, be sure the back is straight as possible and back muscles are tightened. These steps prepare the body to accept the load.

- Hand Protection: Pick up materials with a full palm grip. Do not attempt to pick up weights with a fingertip grip. Ensure the load is free of grease or sharp points which could cause injury. Use suitable gloves when necessary.

- Protect the Back: Always keep the back as straight as possible. It may not be possible to keep the back in the vertical plane but avoid arching the back. Keep the back muscles tightened throughout the duration of the lift. Do not relax the back until the load is released. Bend from the hips and not from the middle of the back.

- General Principles: With the arms, slide the object toward the body to give it some motion (kinetic energy). At the same time, use the legs to lift the object and bring the back to a vertical position. Keep the object close to the body while lifting.

- Team Lifting: When required to manually move heavy or unusually shaped items, always seek and obtain assistance. When two or more people are required to move or carry an object, adjust the load so each person carries an equal part. Test lifts should be made before proceeding. The key to lifts using two or more personnel is to make every move in unison. The supervisor and workers are responsible for assessing all available methods to safely handle materials described above and use mechanical assistance whenever possible.

Carrying Methods: Acceptable carrying methods differ, based upon the type of material, distance, and number of workers. Workers should be instructed during initial training in each procedure (for example, neck, shoulder, side tray, two-person, and under-arm carry methods, etc.).

-

Avoid Twisting: Twisting can overload the spine and lead to serious injury. Make sure feet, knees, and torso are pointed in the same direction when lifting.

Metal/Fiberglass Handling Hazards: Any time employees work around metal or fiberglass, they are subject to cuts, nicks, and scrapes. Be cautious of the bleed out from resin which can leave a sharp edge which presents a laceration hazard. Always deburr the edges of the material to take the razor edge off, and always wear gloves when handling sharp materials.

Air Borne Dust: Employees may be required to sand a variety of sealants, corrosion, and composites. Employees should utilize sanding booths to minimize dust in the shop area. When sanding specific components, employees must wear a respirator and eye protection. Refer to the shop workplace HRA for guidance. If controls are absent or condition of controls are unknown, consult the local Bioenvironmental Engineering (BEE) office or WR-ALC/SE Staff.

High Temperatures: Employees may be required to operate portable cookers, autoclaves, and ovens to cook/bond repairs. Always wear the proper PPE to prevent burns.

Electrical Equipment: Ensure machines powered by electricity are properly disconnected from the power source before performing equipment maintenance. Employees will use a variety of heat lamps, blow dryers, portable cookers, and heat blankets. Always check for frayed electrical cords or damaged plugs. Ensure that malfunctioning equipment has been properly Locked Out and Tagged Out and only authorized employees repair electrical equipment or removed from service and disposed of correctly. Refer to 29 CFR 1910, Subpart S and DAFMAN 91-203, Chapter 8.

Slippery Surfaces: The floors and aisles can pose a potential slipping hazard when a spill or rain occurs. Always wipe up non-hazardous spills immediately. Oil leaks from forklifts and tugs can also be a slipping hazard in the shop; always clean up any spill or leak immediately. Always use caution when in areas where wet or small media is introduced in a process.

Congested Areas: Congested areas have the potential to create falling/tripping hazards. Be aware of these hazards and clean all areas during and after maintenance. Route lines and hoses through areas less traveled and keep the tops of fixtures and cabinets free from loose tools or parts. Keep walkways clear and free of obstructions.

For additional information, refer to 29 CFR § 1910, Subpart D; DAFMAN 91-203, Ch. 7.; and WR-ALCI 91-203, Para. 2.4.1.

Hangar Doors and Overhead Doors: Always stand clear when operating doors. Never enter or exit while a door is in motion. Hazardous areas include crush and pinch points between structural beams and the doors. Highlight hazardous areas such as crush and pinch points that cannot be eliminated by engineering controls or mechanical safeguards with colored paint and signs. Reference WR-ALCI 91-203, Ch. 5; and Attachment 4, HANGAR DOOR SAFETY INSPECTION GUIDE

Vehicles: A golf cart, pick-up truck, or a passenger van/car can be operated with a valid state driver's license. An operator MUST have an AF Form 483, Certificate of Competency, to operate any vehicles on the AMXG industrial ramp or the flightline. Reference WR-ALCI 24-300, Para. 2.4.13 for additional information.

Propeller and Jet Aircraft Blasts: Employees will stay within the prescribed safe distance of 250 feet from the blasts of the aircraft. All run-up areas will be kept free of debris and foreign material. During engine operations, employees will remain at least 25 feet from intakes and propellers. Only authorized employees will be in the operating area. Reference DAFMAN 91-203, Para. 24.10.3 for additional information.

Propeller and Jet Intake Hazards: During aircraft run-up, all employees will avoid danger areas marked by the red strip on the aircraft/engine and/or fuselage. Employees will stay at least 25 feet from the front of the propellers and intakes. C-130 propellers present a hazard whether in operation or static. If bleed air is applied to the aircraft, employees will not be in the vicinity of (or go through) the static propeller arc. Employees will not stand in line with the stripe that designates the plane of the turbine wheel and propeller operation, which is painted on the fuselage or engine nacelles of aircraft. WARNING: Danger Area. Personnel will not be in the vicinity of or go through the static propeller arc of reciprocating and

turboprop aircraft or helicopters unless necessary in performing duties. Employees should always use caution to prevent head injury from ramming unnoticed propellers.

Suspended Loads: Aircraft tail sections, engines, and wing sections have been dropped while suspended by hoists, cranes, or jacks, causing extensive damage and, in some cases, injury. Never stand under a suspended load. Affected employees will thoroughly inspect the equipment suspending loads before each use, safety rules, instructions, and will adhere to IAW DAFMAN 91-203, Chapter 12, Materials Handling Equipment. The wearing of appropriate hard hats is mandatory when working around cranes/hoists. Only authorized personnel will remain in the vicinity of the operation. **Office Hazards:** Each employee is responsible for policing their workplace to reduce the potential for storage and housekeeping-related injuries. Filing cabinets will not be top loaded with heavy items leaving the bottom drawers empty; this creates a tipping hazard. Desk and cabinet drawers will not be left open and unattended. Employees will position all phones, computers, and electrical cords to prevent tripping or obstruction hazards. The last person out of the office will check to ensure that items are turned off and that no conditions exist that could cause damage if left on.

Office Ergonomics: The scientific purpose of ergonomics is to fit the work to the worker. Workstation design should be tailored to provide good lighting, sitting position, and keyboard height. These features provide less strain when working at computer workstations. Repetitive tasks such as typing may create physical problems. To avoid such problems, alternate tasks to prevent the over-exertion of a particular body part or series of parts. Schedule daily tasks with this in mind. Consult the local Ergonomics Office or WR-ALC/SE personnel to schedule an ergonomics assessment and suggest solutions for modifying the work to the worker.

Portable Ladders: Portable ladders are used in a variety of Air Force environments. To ensure employees are minimally exposed to the potential hazards of portable ladders, the following foundational training plan was developed. Refer to manufacture guidance for additional information and training. The supervisor may add additional information as required.

Falls are the primary hazard associated with the use of portable ladders. Falls may result from several unsafe acts and conditions such as:

- Ladders being set on unstable surfaces.
- Personnel reaching too far out to the sides of the ladder.
- Personnel standing too high to maintain balance.
- Personnel using defective ladders (e.g., broken rails, missing hardware)
- Improvising and using a make-shift ladder.
- Personnel carrying materials in their hands while ascending or descending a ladder or descending with their back to the ladder.
- Using a ladder with conductive side rails while working on electrical circuits.

Thorough visual inspections of ladders will be made by the supervisor when the ladder is initially received and prior to being placed in service. Workers will perform a visual inspection prior to each use. Defects or damage to look for include:

- Evidence the ladder was exposed to excessive heat (such as in a fire) or to corrosive substances.
- Side rails, steps, rungs, or related hardware that are cracked, split, or deformed.
- Nonskid base material that is loose or missing. Metal and metal-reinforced single and extension ladders will be equipped with safety shoes, spurs, spikes, or combinations thereof to prevent slipping.
- Metal and metal reinforced ladders that are not marked for electrical hazards.
- Ladders not marked with safety use instructions by the manufacturer shall be stenciled, "DANGER — DO NOT USE AROUND ELECTRICAL EQUIPMENT," in 2-inch-high red letters or the largest letters the surface will allow (minimum letter size is 1 inch).
- Rungs or steps on metal or fiberglass ladders that are not corrugated, knurled, dimpled, or in some way made skid resistant.
- Ladders with broken or missing steps, rungs or cleats, broken side rails, or other defects. Ladders with these defects will not be used.
- Pulleys, cables, and ropes which bind or are frayed.

Employees who use ladders with working height of 4 foot or more will be adequately trained in the care and use of different types of ladders. The supervisor or a designated trainer will conduct this training

when a worker is first assigned. All training will include hands-on instruction to include inspection of ladders for defects, possible electrocution hazards, proper positioning, and placement of ladders for various job sites. Additional information for ladders can be found in DAFMAN 91-203, paragraph 7.4.

RISK MANAGEMENT FUNDAMENTALS

Reference: DAFSMS and local RM program guidance.

Address hazard identification, control selection, local escalation expectations, and when RM refresher training must be completed for this work center.

Document how the work center covers RM fundamentals, where refresher files or briefing materials are stored, and how personnel access those resources.

JOB SPECIFIC TRAINING ITEMS

No job-specific modules selected yet.

REFERENCES

Enter TOs, JHAs, DAFIs, DAFMANs, local guidance, and manufacturer instructions used by this work center.

REQUIRED DOCUMENTS

- [CA-10](#)
What a Federal Employee Should Do When Injured at Work. Use this as the workplace reference for employee injury reporting and follow-up actions.
- [DAF Form 457](#)
Hazard Report. Use this form to identify, document, and elevate unsafe conditions, equipment, or procedures in the workplace.
- [DAFVA 91-209](#) **UNITS MUST FILL IN THEIR OWN DAFVA 91-209 POSTING/LOCATION INFORMATION.**
Department of the Air Force Occupational Safety and Health Program visual aid. Keep this available so personnel know the core safety rights, responsibilities, and reporting expectations.
Location Posted: Enter where DAFVA 91-209 is posted for this work center.
- [LS-201](#)
Notice of Employee's Injury or Death (Non-Appropriated Funds). Use this when applicable for NAF employee injury or death reporting.

DAF TRAFFIC SAFETY PROGRAM

Reference: DAFI 91-207. Requirements of the DAF traffic safety program include mandatory use of seat belts and helmets, speed limits, local traffic hazards, spotters while backing, and vehicle training requirements.

Additionally, brief prohibition or restrictions on electronic-device use while operating vehicles on- or off-base, and discuss motorcycle safety training requirements before riding a motorcycle.

On-Base / Vehicle Operations

- Obey posted speed limits, traffic control devices, and local roadway rules.
- Use installed seat belts and occupant restraints as designed by the

Electronic Devices / Headphones

- Do not use non-hands-free electronic devices while operating a motor vehicle.
- Stop in a safe location before using a phone if hands-free operation is not

manufacturer.

- Use spotters while backing when required by local policy, task conditions, or vehicle type.
- Complete required GOV, GVO, golf cart, low-speed vehicle, or mission-specific vehicle training before operation.

available.

- Do not wear headphones or listening devices in ways that interfere with hearing traffic, alarms, or emergency warnings.

Motorcycle / ATV Safety

- Complete required motorcycle rider training before riding on a roadway.
- Wear required PPE including helmet, eye protection, gloves, protective clothing, and over-the-ankle footwear.
- Carry proof of required training when applicable and comply with state licensing requirements.

Pedestrian / Bicycle Awareness


- Use caution at crossings, follow traffic controls, and wear visibility gear when exposed to roadway hazards.
- Use required lighting and reflective equipment during darkness, reduced visibility, or inclement weather.



Department of the
Air Force Rider

#DAFRider Timeline

Right Training ... Right Time ... Right Bike

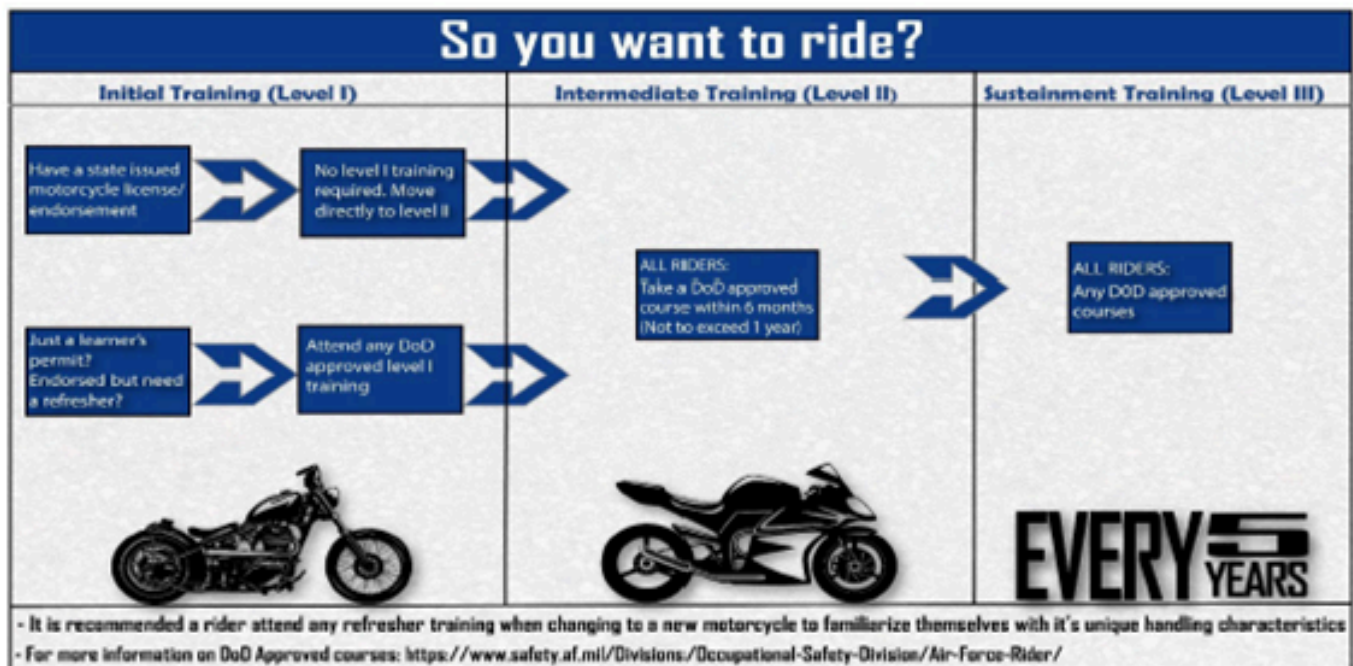

Every DAFRider should be physically capable, mentally prepared, and their motorcycle mechanically sound.

Local Traffic Hazards / Vehicle Notes:

Requirements of Air Force Traffic Safety Program (Reference: AFI 91-207).

- Seat belts will be worn when operating or riding in any motor vehicle on RAFB. Drivers are responsible for ensuring that passengers fasten their seatbelts.

Hands free cell phones are authorized for use while driving on RAFB, all other cell phone use will require the driver to pull over and stop the vehicle.

- All bicycle riders on RAFB will be required to always wear appropriate head gear.

- Speed limits are typically posted for all roads on RAFB, however, if no signs are posted 25 mph will be adhered to.

- Be vigilant of the pedestrian cross walks while operating a vehicle on RAFB and stop whenever pedestrians are present in the cross walks.

Motorcycle Safety Representatives / Traffic Contacts:

List unit or group motorcycle safety representatives, traffic safety contacts, and local rider briefing requirements.

No GVO risk assessment files uploaded.

EMERGENCY INFORMATION

- **Emergency Numbers:**

WR-ALC Safety Office 468-1708, 472-3245

On-base (Fire/Ambulance/Police) 911 (Base phone) or 222-2900 (Cell)

Aircraft Maintenance Operations Center (AMOC) 468-3567 / 468-5428

Group Communications Center (GCC) 478-468-0080

- **Medical Facility / Treatment:**

Emory Hospital - 1601 Watson Blvd, Warner Robins, GA 31093 Phone: (478) 922-4281

- **Evacuation / Muster Point:**

Emergency action and fire prevention plans applicable to the workplace:

- Brief the location and use of emergency and fire protection equipment (i.e., alarms, AEDs, and extinguishers). Refer to figure 2.
- In the event of a fire, all personnel will report to their designated assembly area so that every employee is accounted for. Failure to do so may result in a false report to the fire department.
- Fire extinguishers and fire alarm pull stations are located throughout the areas. A fire alarm is always near doors that open exterior to the building. Refer to emergency management plans for additional information. To activate the fire alarm, pull station, grab the handle and pull down sharply.
- Only use fire extinguishers to fight small containable fires. Refer to the acronym PASS to properly use a fire extinguisher:
 - Pull the pin located on the handle.
 - Aim the hose at the base of the fire.
 - Squeeze the handle to dispense agent.
 - Sweep the hose from side to side until the fire has been extinguished.
- Extreme caution must be used when fighting any fire regardless of size. Even after successfully extinguishing a fire, contact the Fire Department and advise them of the fire. Additional training for all types of fire and all types of fire extinguisher is available through the fire prevention office.
- Know installation siren signals. Listen to the radio, television, public address system, or Security Police vehicle PA system for type of emergency and action required. Be prepared to take shelter.

- **Shelter in Place:**

Building 321 Shelter in Place Locations:

- Planner's Area & Group Control Center
- Administrative Hallway
- Small Conference Room
- Break Room
- Warehouse Admin Area

Active Shooter Response. Escape, Barricade, or Fight. During an active shooter incident, there are three response options: escape, barricade, and/or fight. These choices are not in any particular order and there are no requirements to progress through one option before selecting another. The decision whether to escape, barricade, or fight is based on two factors: (1) proximity to the shooter, and (2) the accessibility of escape routes. Refer to AFTTP 3-4.6, Air Force Tactics, Techniques, and Procedures.

Not entered

BUILDING 321 EVACUATION ASSEMBLY POINTS

312

300FT

ALTERNATE ASSEMBLY AREA

300FT

WARNER ROBINS ST

SECURED AREA - FENCED (LIMITED ENTRANCE & EXIT)

B321-BOMB THREAT AND FIRE-EMERGENCY ASSEMBLY POINTS

B321 Personnel should gather immediately at the designated Primary Assembly Area noted unless instructed to go to the Alternate Assembly Area. ALL personnel should remain at the Assembly Area until notified to return to work. Supervisors will take ROLL CALL and ACCOUNT for assigned personnel.

ACCESS ROAD

GRASS AREA

300FT

PRIMARY ASSEMBLY AREA

BUILDING 321

196

RICHARD RAY BLVD


ROBINS PKWY

THIRD ST

Safety Bulletin Board Location: Not entered

List fire pull stations, extinguishers, power cutoffs, eyewash stations, AEDs, foam systems, and any local fire/emergency equipment notes.

Emergency Equipment Maps / Photos:

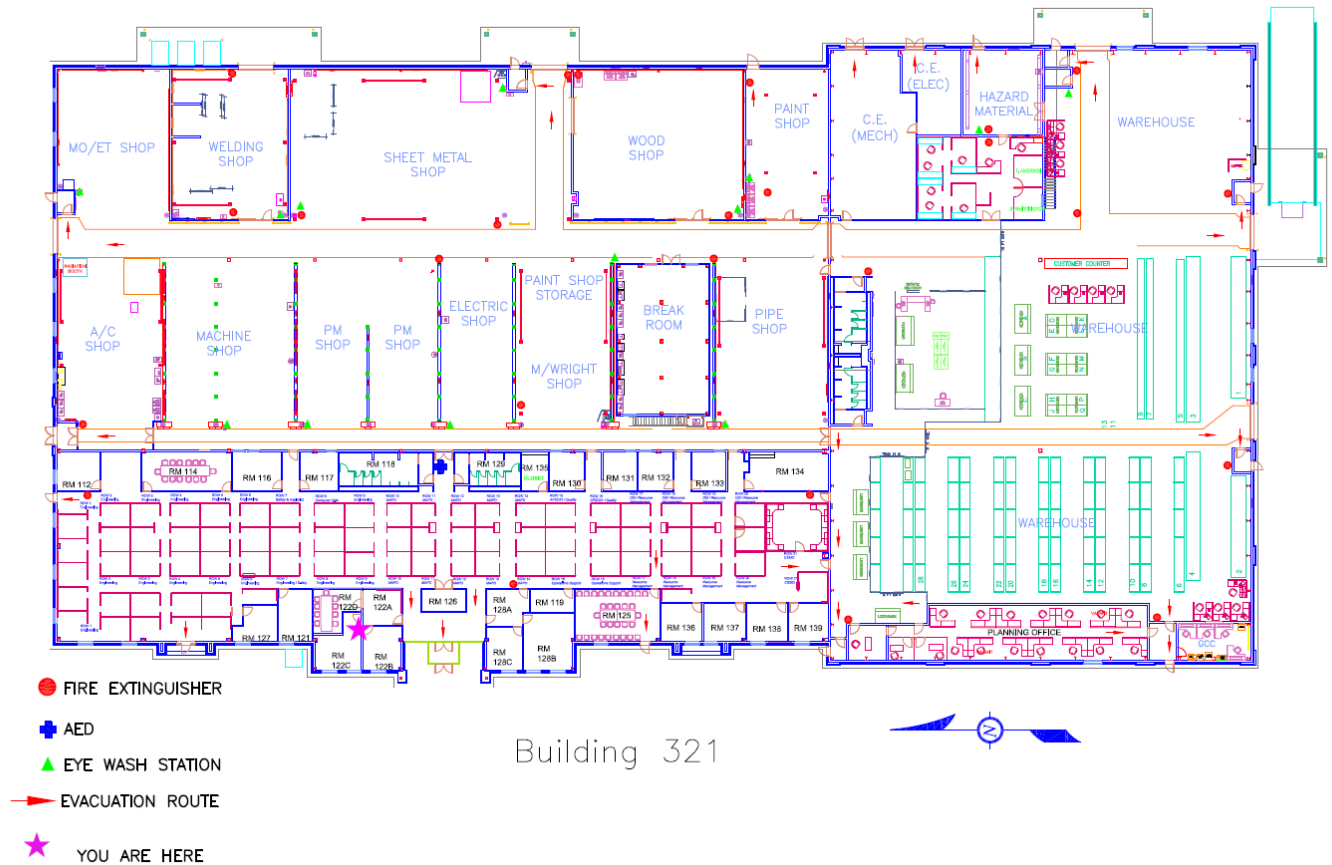

Bldg 321 EM2_Admin Rm 122.png

DOCUMENTATION AND REVIEW

Document initial, refresher, and task-specific training in the work center record, review annually or when work conditions change, and maintain records per local records management requirements.

No DAF Form 1118 files uploaded.

No Bioenvironmental Workplace Survey uploaded.

Annual Review History:

Each annual review entry is shown in the table below.

Supervisor Name	Date Reviewed	Contact Info
Randy L. Bowen, NH-03, Technical Advisor		472-0253