


See the Light
Technology Driven by
Optical Fluorescence

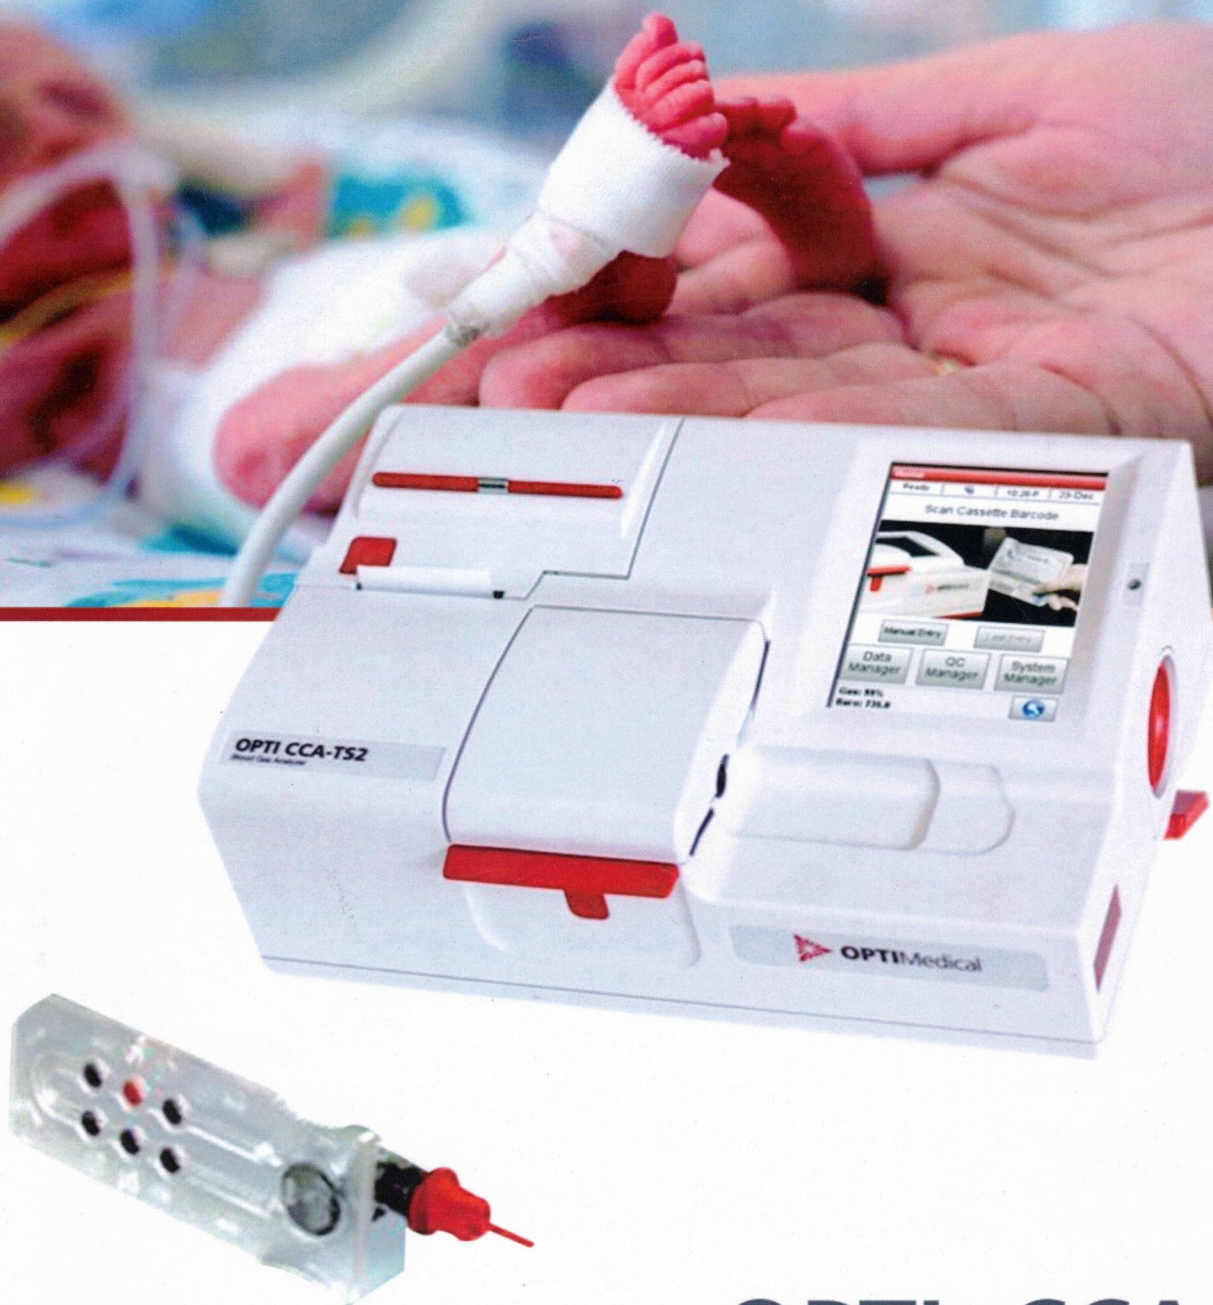

OPTI CCA-TS2
Portable/Benchtop Blood Gas Analyzer
Simple • Accurate • Reliable

OPTI[®] CCA-TS2

Upgradable, Portable/Benchtop Blood Gas & Electrolyte Analyzer with Optical Fluorescence Technology

Innovative Optical Technology

The OPTI CCA-TS2 utilizing the latest Optical Fluorescence Technology. This unique patented technology does not use traditional electrodes or contact points, which eliminates the need for costly electrode maintenance. It uses maintenance free optical sensors.

Accurate Results

Reduce pre-analytical errors with Automatic Sample Aspiration, bubble and clot detection and step by step picture instructions on the High resolution large colorful touch screen.

Significant Cost Savings

The OPTI CCA-TS2 analyzer provides lab quality results with zero standby cost. The single use consumable. Stored at room temperature, is only used during a measurement and safety locks waste inside.

Simplify Compliance

Compliance and audit trails are made easy with QC Lockouts, maintenance log and multiple levels security. Save time and reduce errors by using the built-in barcode scanner to quicker enter user ID and patient IDs.

Electrolyte Analysis (Separately)

Only electrolyte parameters (Na⁺, K⁺, Ca⁺⁺ & Cl⁻) can be also performed separately with pH & calculated parameters.

MEASURED PARAMETERS	RANGE	RESOLUTION
pH	6.6 - 7.8 pH units	0.001 pH units
pCO ₂	10 - 200 mmHg	0.1 mmHg
pO ₂	10 - 700 mmHg	0.1 mmHg
tHb	5 - 25 g/dL	0.1 g/dL
sO ₂	60% - 100%	0.1%
Na ⁺	100 - 180 mmol/L	0.1 mmol/L
K ⁺	0.8 - 10 mmol/L	0.01mmol/L
Ca ⁺⁺	0.2 - 3.0 mmol/L	0.01mmol/L
Cl ⁻	50 - 160 mmol/L	0.1mmol/L
Glucose	1.7 - 22.2 mmol/L (30 - 400 mg/dL)	0.1mmol/L (0.1 mg/dL)
Lactate	0.3 - 17.5 mmol/L (2.7-157.7 mg/dL)	0.01 mmol/L (0.1 mg/dL)
BUN (Urea)	2.8 - 112.0 mg/dL (1 - 40 mmol/L)	0.1mg/dL (0.01 mmol/L)
Barometric Pressure	300 - 800 mmHg	0.1 mmHg

CALCULATED PARAMETERS

Actual Bicarbonate (HCO₃⁻)
Standard Bicarbonate (st.HCO₃⁻)
Base Excess (BE)
Base Excess Extra Cellular Fluid (BEecf)
Base Excess Actual (BEact)
Buffer Base (BB)
Standard pH (st.pH)
Hydrogen Ion Conc. (cH⁺)
Total CO₂ (tCO₂)
Oxygen Saturation (SO₂)
Oxygen Content (O₂ ct)
Alveolar-arterial O₂ Conc. (AaDO₂)
P50
St. Ionized Calcium (pH=7.4)(nCa⁺⁺)
Hematocrit (Hct)
Anion Gap

INPUT PARAMETERS

Operator ID
Patient ID
Accession Number
Date of Birth
Sex
Temperature
Medical Record Number
Account Number
Test ID
Patient Name
Age
Attending Physician
Patient Location
Sample Collection Time
Sample Type
Puncture Site
Allen's Test
tHb Type
O2 Mode
Vent Mode
Pplat
Mvol
PIP
Litre Flow
Tvol
PS
PEEP
Rate
CPAP
FIO₂
MCHC
RQ
P50
Bilevel Pressure
I/E Ratio
Comment field

Wide Operating Temperature

The OPTI CCA-TS2 analyzer has a measuring chamber heated to 37°C. This allows for a wide operating temperature to meet the needs of colder environments such as the operating room.

Comprehensive Test Menu

To help meet exact testing needs, the OPTI CCA-TS2 has a variety of cassettes configuration available. Each cassette comes individually wrapped in cartons of 25 tests, reducing the potential for consumable waste.

Advance Communication

The OPTI CCA-TS2 analyzer now features a standard POCT 1 interface for bi-direction communication and can be interfaced to any LIS/HIS using the Ethernet.

Rechargeable Battery (Optional), Thermal Printer & Cassette Shelf Life

Longer Lasting Rechargeable Battery Backup of upto 8 hours. Allows blood gas testing when electric service is not available. Also it has built in Fast Load Thermal Printer and Long Cassette Shelf Life having 6-12 months from the date of manufacture.

Quality Control

OPTI provides tri levels Liquid Quality Controls and Electronic QC as well to check the performance of the analyzer on regular and as and when required basis.

OPERATING PARAMETERS

Minimum Sample Size: 125 µL, 60µL for B-60 cassette
Sample Type: Whole Blood, Plasma, or Serum
Sample Application: Syringe, Capillary or Comfort Sampler™
Sample Input: Automatic Aspiration
Analysis Time (Time to Results): < 120 Seconds
Ambient Temperature: 10° C - 30° C (50°F - 86°F)
Relative Humidity: 5% - 95% (Non-Condensing)
Available Languages: English & 10 others

DATA BASE

Patient Data: 500 Records
QC Data: 70 Records Per Level
SRC Data: 105 Records per Level

SECURITY

Storage for 300 Operator IDs (11) Digits) & Passwords
Associated PIN (4 Digits)
Password Protected Analyzer Setup
Operation and Delete Functions
User Definable QC Lockout Functions

MISCELLANEOUS

Power Consumption (Max.): 110 VA
Interface: ASTM, ASCII, and POCT1 protocols
(Ethernet and USB Serial)
Ports: USB Type A
Approvals: CE, UL, IVDD, FDA 510k cleared
Size: 4.7 H x 14.2 W x 9.1 D in (12.0 x 36.2 x 23.0 cm)
Weight: 4.3 kg (9.6 lbs) with rechargeable Battery Pack
Voltage/Frequency: 120 or 240 AC/50-60 Hz



Food and Drug Administration



OPTI Medical Systems, Inc.
235 Hembree Park Drive
Roswell, Georgia 30076 USA
www.optimedical.com



Exclusively Marketed in India by **Sowar Medical**
A Division of:

SOWAR Private Limited

CSC, C-9, Vasant Kunj, New Delhi - 110070
Phone : +91-11- 41767519, 41767520,
41767521, 41767522

E-mail : sowar@sowarmedical.com
info@sowarmedical.com

Web. : www.sowarmedical.com

Sales Offices :

Chennai, Bangalore, Coimbatore, Hyderabad,
Mumbai, Pune, Nagpur, Ahmedabad,
Kolkata, Guwahati, Patna, Raipur,
Bhopal, Dehradun, Varanasi, Lucknow
Ludhiana