



MCP22301 Sink Board

Table of Contents

Sheet	Description
1	Table of Contents and Block Diagram
2	MCP22301 Sink Circuitry Page 1
3	MCP22301 Sink Circuitry Page 2

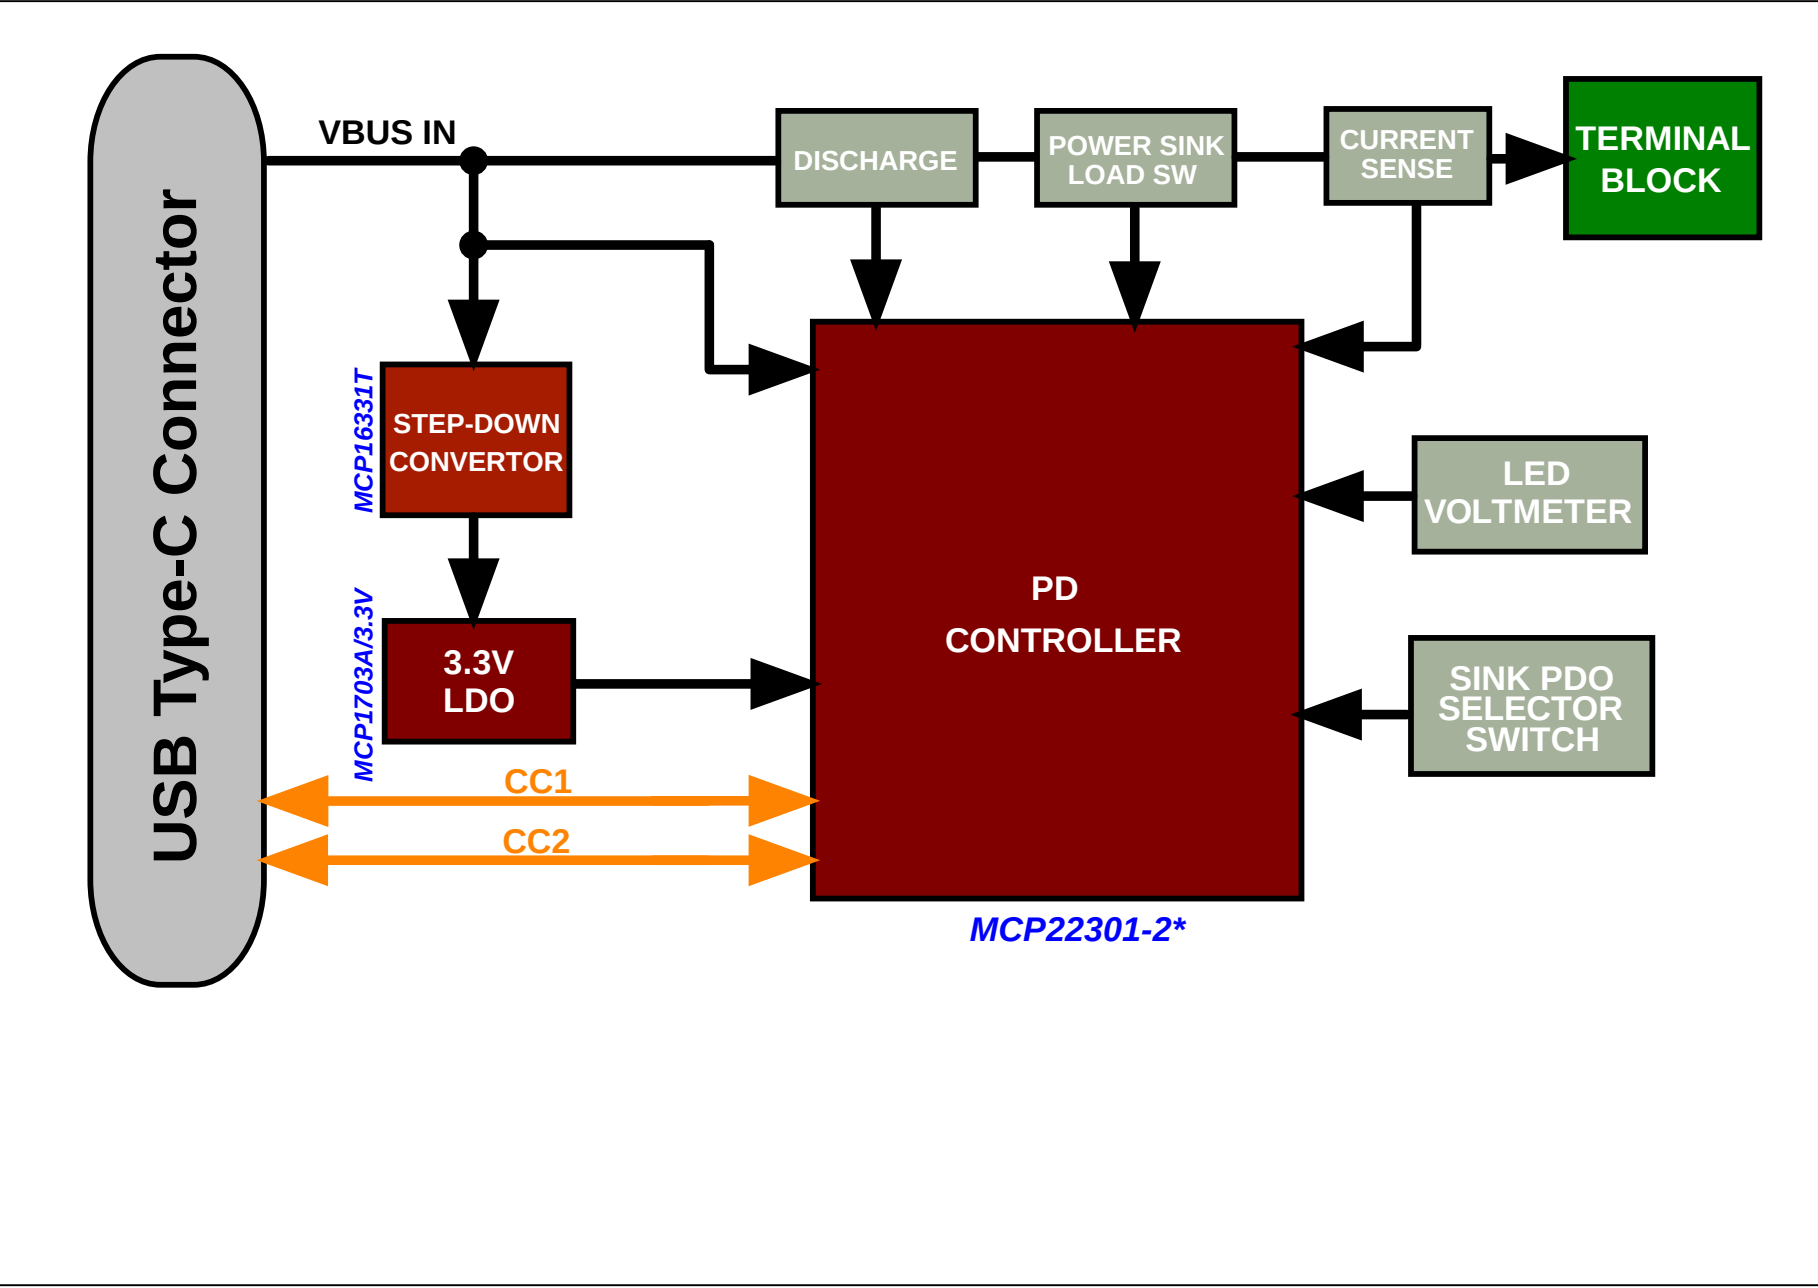

MCP22301 Sink Circuitry Page 1

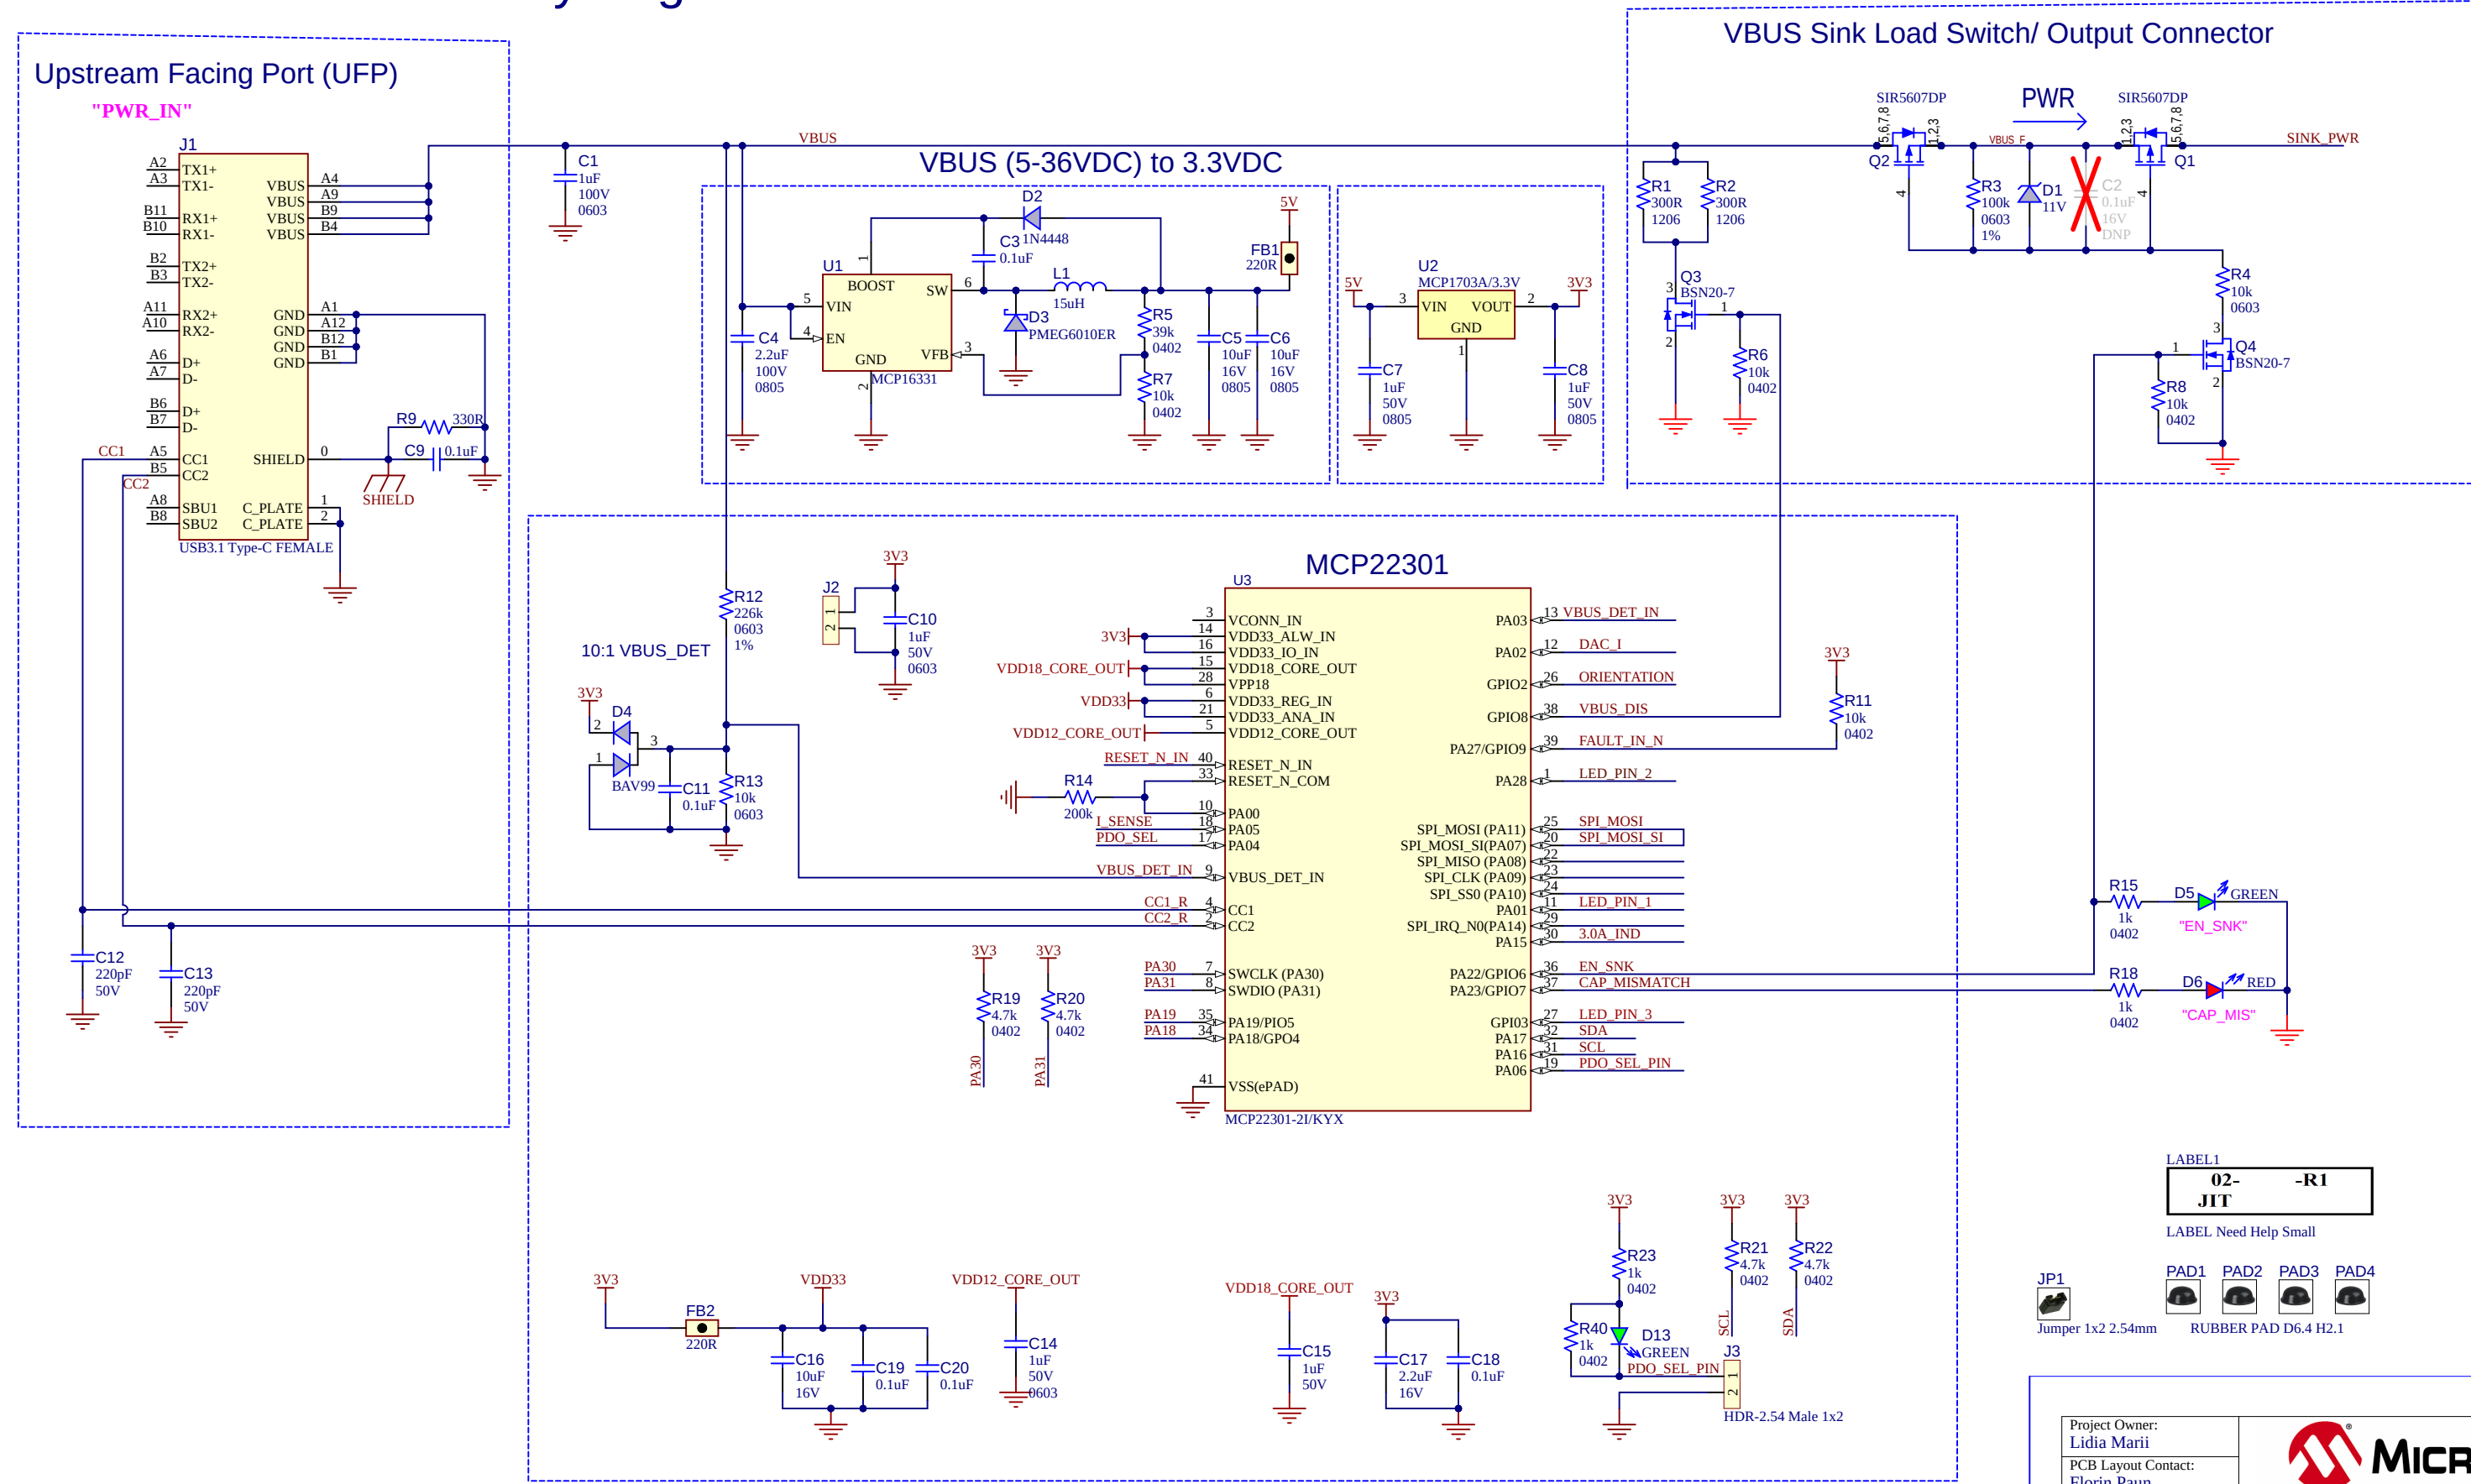

Project Owner:
Lidia Marii

PCB Layout Contact:
Florin Paun

PartNumber:
EV71V36A

Project Title
MCP22301 Sink Board

Variant: standard with DNP

Sheet Title
MCP22301 Sink Board

Size
Tabloid

SCH #:02-01257

Rev: 1

Date: 1/29/2025

Rev: 1

Sheet 2 of 3

Designed with
Altium

Altium.com

02-
JIT

-R1

Need Help Small

JP1
Jumper 1x2 2.54mm

PAD1

PAD2


PAD3

PAD4

RUBBER PAD D6.4 H2.1

MCP22301 Sink Circuitry Page 2

Sink PDO Capability Selector Switch

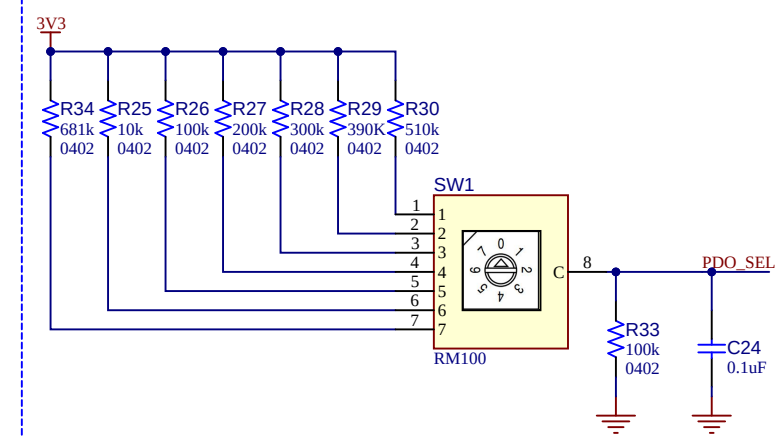


Switch Position	PDO_SEL Voltage
1	5V
2	9V
3	15V
4	20V
5	28V
6	36V
8	9V PPS
9	9V AVS
11	15V AVS
12	28V AVS
13	36V AVS

Use of the PDO Selector Switch depends on PSF application.
A recommended use-case is to use the knob to select on Sink PDO from a pre-configured list of Sink PDO options.

R25	2.99V
R26	1.64V
R27	1.09V
R28	0.82V
R29	0.67V
R30	0.53V
R34	0.42V


VBUS LED Voltmeter

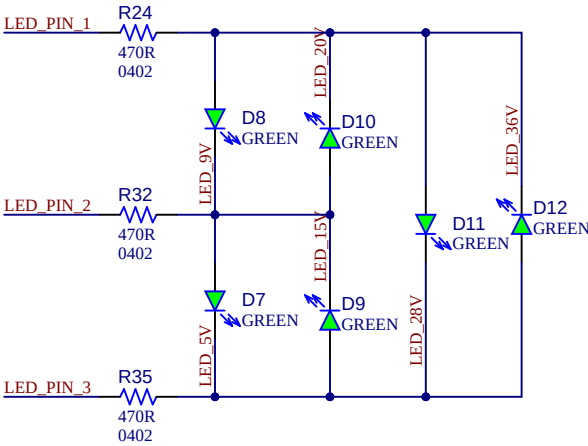

The LED Voltmeter provides a visual indication of the approximate voltage at the PD connector.


Current Sense Amplifier

A discrete current sense amplifier is not required for PSF applications.
This is an optional component which may be used to sense current draw and use that information in an application specific way (i.e.: shutdown in an overcurrent condition)

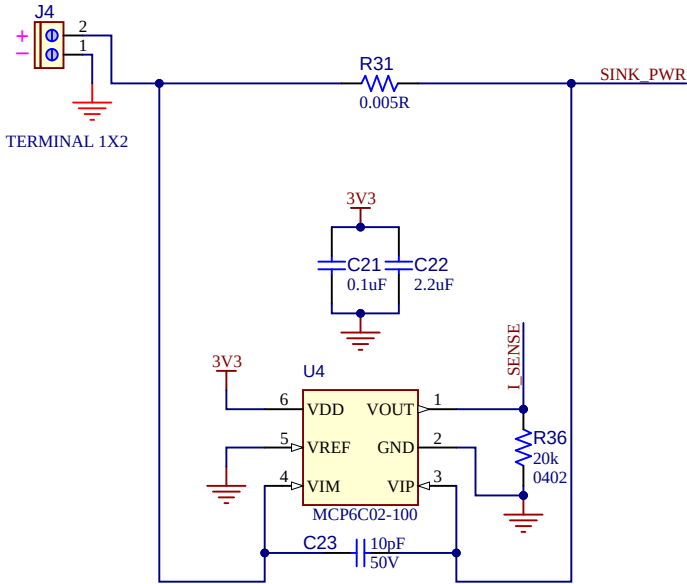

Scale: 5A = 2.5V
Gain = 100

Debug/Status

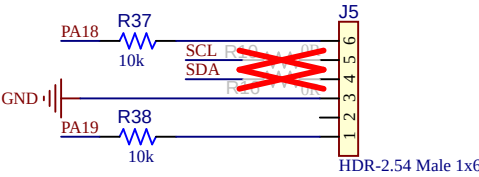

ICSP

