

NOTES

1. Concept layout for review and alignment. Placeholder geometry: not a design, not for manufacture.
2. Dimensions in millimetres; scale 1:50 on a 420 × 297 mm sheet. Third-angle projection.
3. Centre of gravity uses placeholder effective densities (cad/params/common.yaml).
4. Static margin: shortest distance from CG to the support-polygon edge; tip angle = atan(margin / CG height).
5. Docked rotor to pilot 790; UAV drawn in blue; 1.75 m person in grey.


⚠ static margin 142 mm is under the 300 mm review flag
⚠ docked rotor 790 mm from the pilot: under the 1000 mm flag

PLAN (from above, front →)

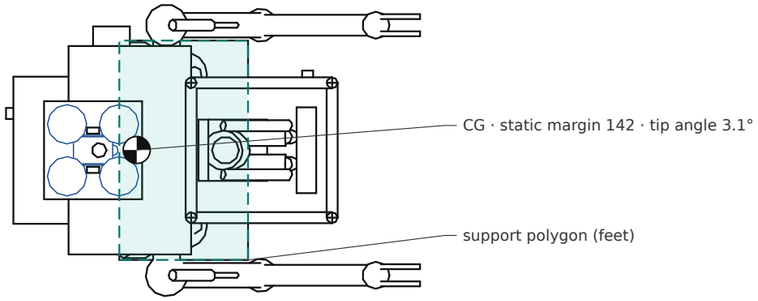


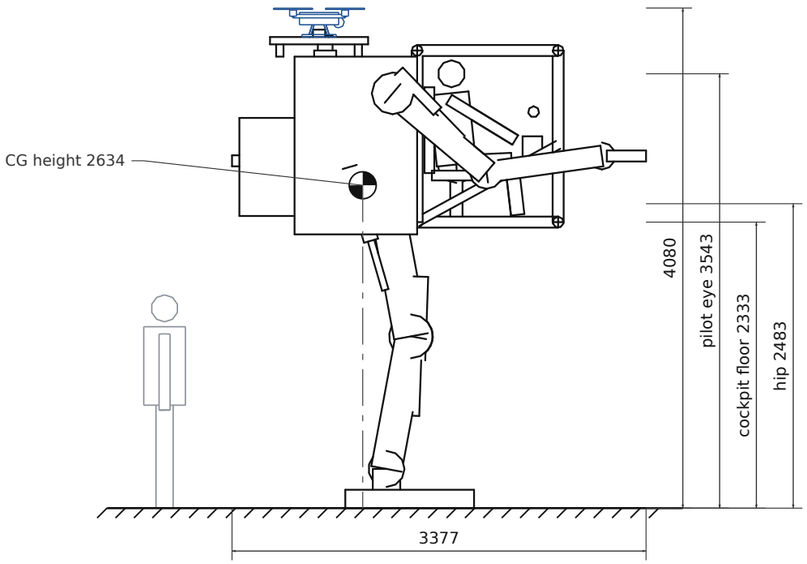

SIDE ELEVATION (from the right, front →)

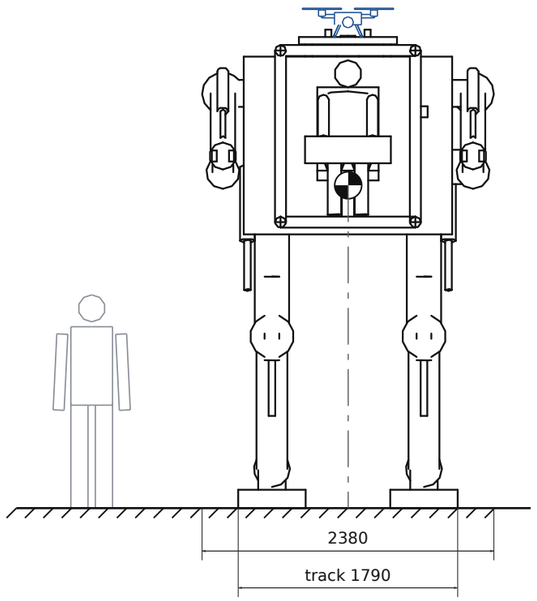

FRONT VIEW (from the front)



third-angle

PROJECT SUSANOO · SUS-M1 / SUS-A1 / SUS-I1

CL-01 · Biped, seated protected cockpit, rear backpack dock

DRAWING	SCALE / SHEET	UNITS	REVISION
SUS-CAD-001-CL-01	**1:50 · 420×297**	**mm**	**0.21-draft**
STATUS	DRAWN	SOURCE	LICENCE
CONCEPT, NOT REVIEWED	Claude (AI-drafted), I0	cad/params/CL-01.yaml	**CC BY 4.0**


Terms: AI = artificial intelligence (here, an AI assistant drafting at independence level I0) · CC = Creative Commons; CC BY 4.0 is the Creative Commons Attribution 4.0 licence used for the documentation · CG = centre of gravity · CL-nnn = concept layout (cad/params/CL-nn.yaml; CL-01 to CL-05, CL-05 the reference layout) · I0–I3 = review independence level (I0 none, e.g. the author or an AI, to I3 independent organisation) · SUS-A1 = dockable observation UAV · SUS-CAD-001 = the concept layouts document (cad/README.md); its drawing sheets are SUS-CAD-001-CL-nn · SUS-I1 = integrated mechanized walker and observation UAV · SUS-M1 = piloted walker · UAV = uncrewed aerial vehicle (drone)


NOTES

1. Concept layout for review and alignment. Placeholder geometry: not a design, not for manufacture.
2. Dimensions in millimetres; scale 1:50 on a 420 × 297 mm sheet. Third-angle projection.
3. Centre of gravity uses placeholder effective densities (cad/params/common.yaml).
4. Static margin: shortest distance from CG to the support-polygon edge; tip angle = atan(margin / CG height).
5. Docked rotor to pilot 630; UAV drawn in blue; 1.75 m person in grey.


⚠ static margin 145 mm is under the 300 mm review flag
⚠ docked rotor 630 mm from the pilot: under the 1000 mm flag

PLAN (from above, front →)

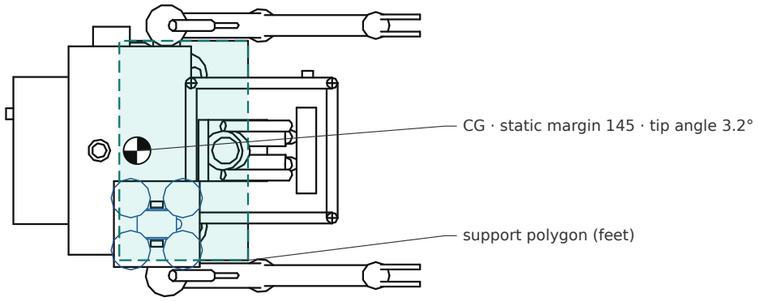


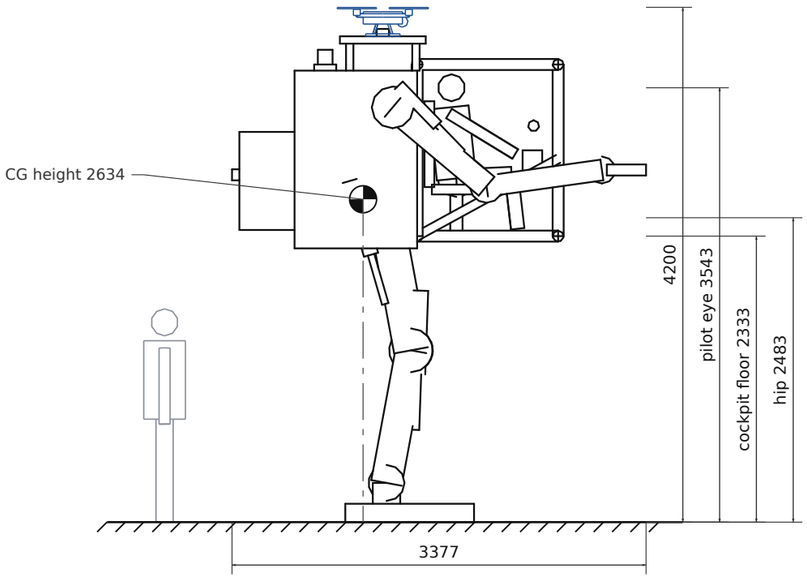

SIDE ELEVATION (from the right, front →)

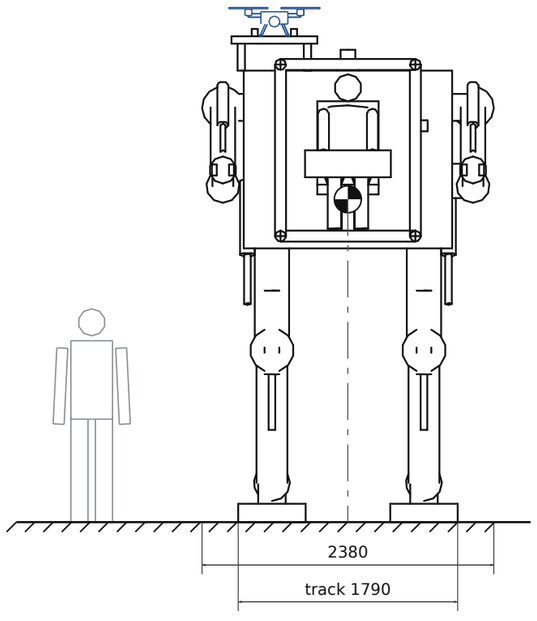

FRONT VIEW (from the front)




PROJECT SUSANOO · SUS-M1 / SUS-A1 / SUS-I1


CL-02 · Biped, seated protected cockpit, shoulder-mounted dock


DRAWING	SCALE / SHEET	UNITS	REVISION
SUS-CAD-001-CL-02	**1:50 · 420×297**	**mm**	**0.21-draft**
STATUS	DRAWN	SOURCE	LICENCE
CONCEPT, NOT REVIEWED	Claude (AI-drafted), I0	cad/params/CL-02.yaml	**CC BY 4.0**

Terms: AI = artificial intelligence (here, an AI assistant drafting at independence level I0) · CC = Creative Commons; CC BY 4.0 is the Creative Commons Attribution 4.0 licence used for the documentation · CG = centre of gravity · CL-nnn = concept layout (cad/params/CL-nn.yaml; CL-01 to CL-05, CL-05 the reference layout) · I0–I3 = review independence level (I0 none, e.g. the author or an AI, to I3 independent organisation) · SUS-A1 = dockable observation UAV · SUS-CAD-001 = the concept layouts document (cad/README.md); its drawing sheets are SUS-CAD-001-CL-nn · SUS-I1 = integrated mechanized walker and observation UAV · SUS-M1 = piloted walker · UAV = uncrewed aerial vehicle (drone)


PLAN (from above, front →)



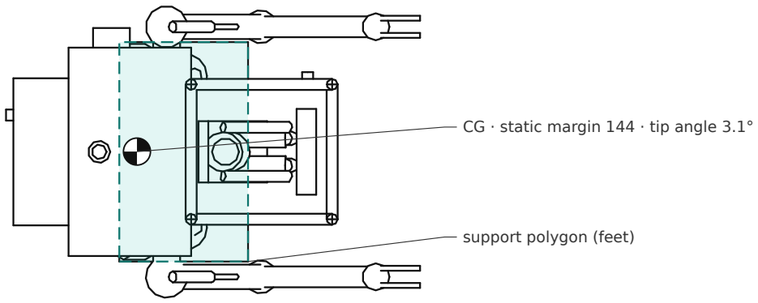

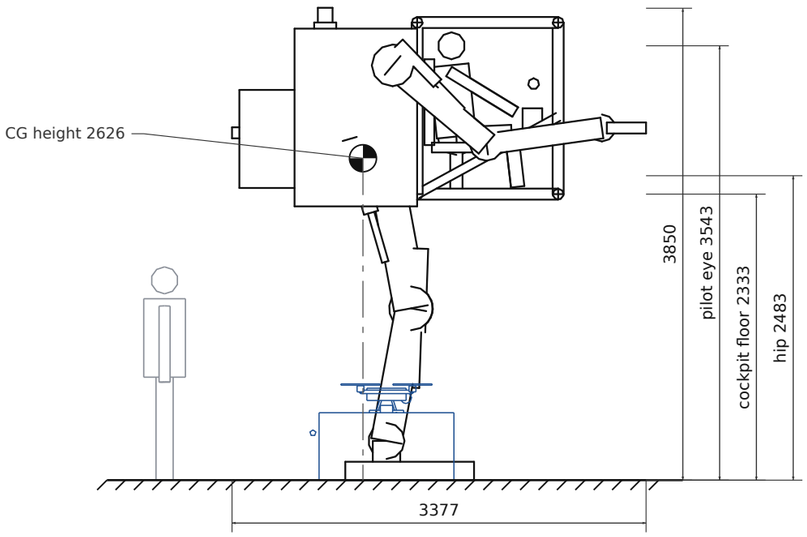

SIDE ELEVATION (from the right, front →)

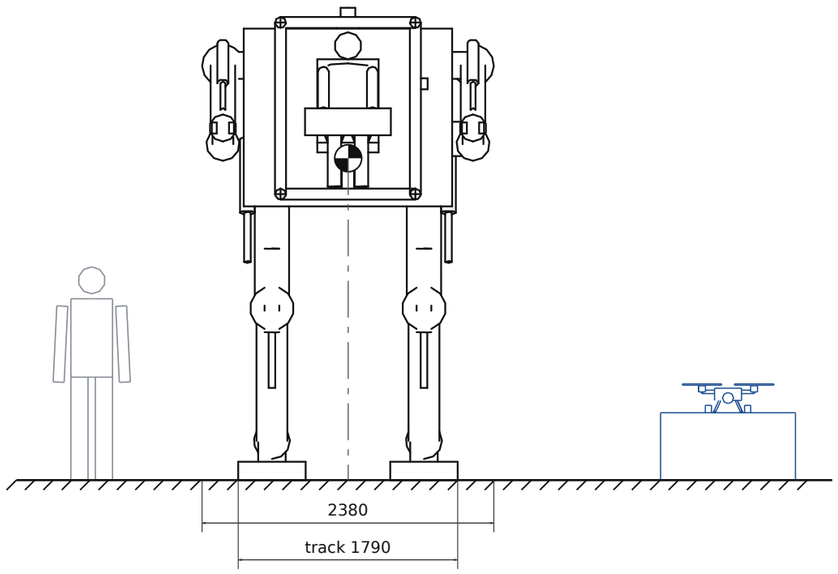


FRONT VIEW (from the front)

NOTES

1. Concept layout for review and alignment. Placeholder geometry: not a design, not for manufacture.
2. Dimensions in millimetres; scale 1:50 on a 420 × 297 mm sheet. Third-angle projection.
3. Centre of gravity uses placeholder effective densities (cad/params/common.yaml).
4. Static margin: shortest distance from CG to the support-polygon edge; tip angle = atan(margin / CG height).
5. Docked rotor to pilot 3140; UAV drawn in blue; 1.75 m person in grey.

⚠ static margin 144 mm is under the 300 mm review flag



third-angle

PROJECT SUSANOO · SUS-M1 / SUS-A1 / SUS-I1

CL-03 · Biped, seated protected cockpit, separate portable station

DRAWING	SCALE / SHEET	UNITS	REVISION
SUS-CAD-001-CL-03	**1:50 · 420×297**	**mm**	**0.21-draft**
STATUS	DRAWN	SOURCE	LICENCE
CONCEPT, NOT REVIEWED	Claude (AI-drafted), I0	cad/params/CL-03.yaml	**CC BY 4.0**


Terms: AI = artificial intelligence (here, an AI assistant drafting at independence level I0) · CC = Creative Commons; CC BY 4.0 is the Creative Commons Attribution 4.0 licence used for the documentation · CG = centre of gravity · CL-nnn = concept layout (cad/params/CL-nn.yaml; CL-01 to CL-05, CL-05 the reference layout) · I0–I3 = review independence level (I0 none, e.g. the author or an AI, to I3 independent organisation) · SUS-A1 = dockable observation UAV · SUS-CAD-001 = the concept layouts document (cad/README.md); its drawing sheets are SUS-CAD-001-CL-nn · SUS-I1 = integrated mechanized walker and observation UAV · SUS-M1 = piloted walker · UAV = uncrewed aerial vehicle (drone)


NOTES

1. Concept layout for review and alignment. Placeholder geometry: not a design, not for manufacture.
2. Dimensions in millimetres; scale 1:50 on a 420 × 297 mm sheet. Third-angle projection.
3. Centre of gravity uses placeholder effective densities (cad/params/common.yaml).
4. Static margin: shortest distance from CG to the support-polygon edge; tip angle = atan(margin / CG height).
5. Docked rotor to pilot 920; UAV drawn in blue; 1.75 m person in grey.


⚠ static margin 225 mm is under the 300 mm review flag
⚠ docked rotor 920 mm from the pilot: under the 1000 mm flag

PLAN (from above, front →)

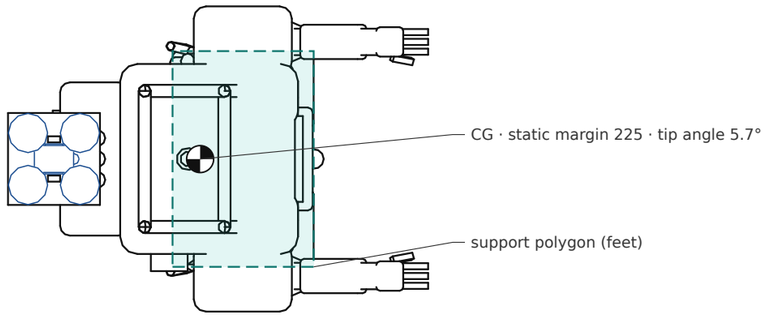


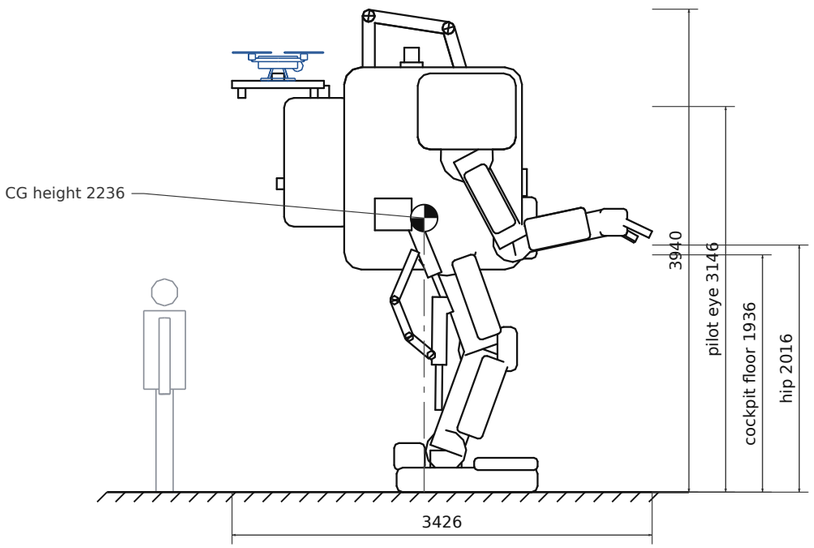

SIDE ELEVATION (from the right, front →)

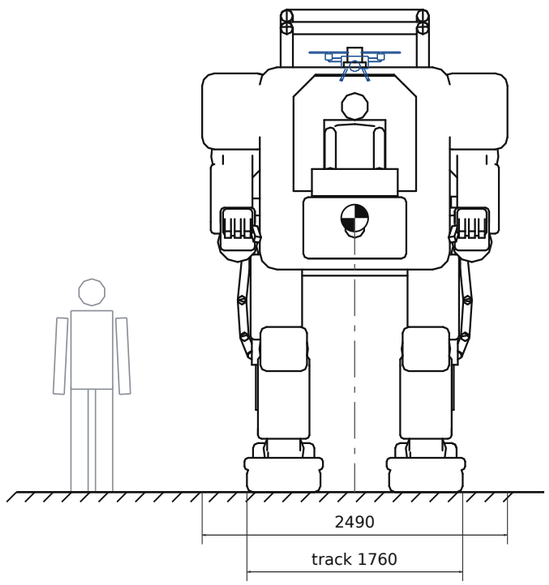

FRONT VIEW (from the front)



third-angle


PROJECT SUSANOO · SUS-M1 / SUS-A1 / SUS-I1			
CL-04 · Biped armoured pod, seated cockpit, rear dock			
DRAWING **SUS-CAD-001-CL-04**	SCALE / SHEET **1:50 · 420×297**	UNITS **mm**	REVISION **0.21-draft**
STATUS **CONCEPT, NOT REVIEWED**	DRAWN Claude (AI-drafted), I0	SOURCE cad/params/CL-04.yaml	LICENCE **CC BY 4.0**


Terms: AI = artificial intelligence (here, an AI assistant drafting at independence level I0) · CC = Creative Commons; CC BY 4.0 is the Creative Commons Attribution 4.0 licence used for the documentation · CG = centre of gravity · CL-nnn = concept layout (cad/params/CL-nn.yaml; CL-01 to CL-05, CL-05 the reference layout) · I0–I3 = review independence level (I0 none, e.g. the author or an AI, to I3 independent organisation) · SUS-A1 = dockable observation UAV · SUS-CAD-001 = the concept layouts document (cad/README.md); its drawing sheets are SUS-CAD-001-CL-nn · SUS-I1 = integrated mechanized walker and observation UAV · SUS-M1 = piloted walker · UAV = uncrewed aerial vehicle (drone)

NOTES


1. Concept layout for review and alignment. Placeholder geometry: not a design, not for manufacture.
2. Dimensions in millimetres; scale 1:50 on a 420 × 297 mm sheet. Third-angle projection.
3. Centre of gravity uses placeholder effective densities (cad/params/common.yaml).
4. Static margin: shortest distance from CG to the support-polygon edge; tip angle = atan(margin / CG height).
5. Docked rotor to pilot 1090; UAV drawn in blue; 1.75 m person in grey.

PLAN (from above, front →)

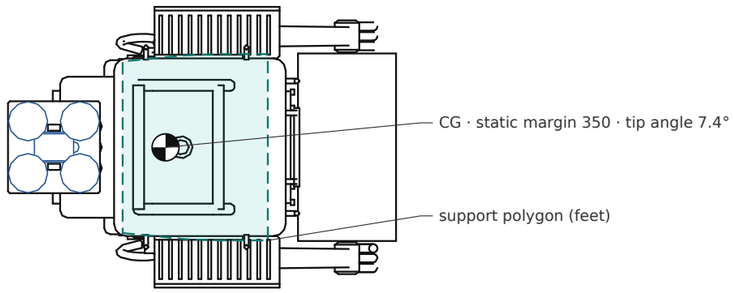


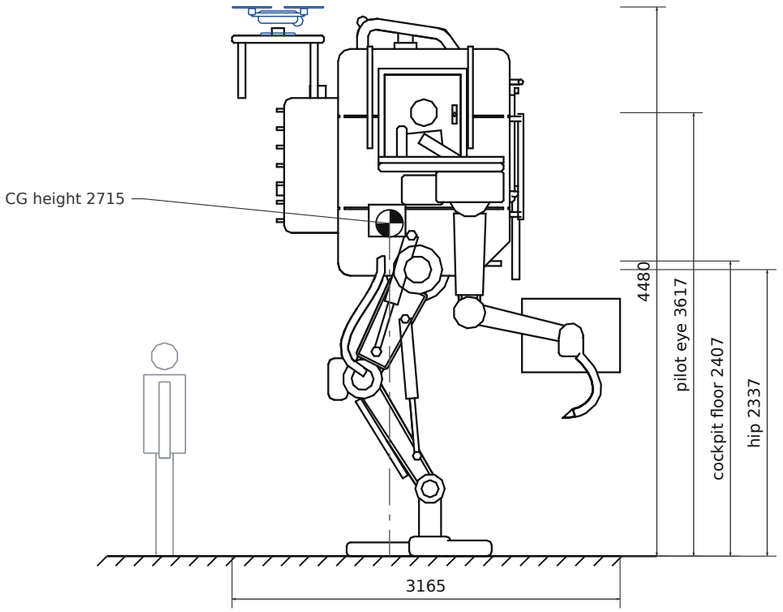

SIDE ELEVATION (from the right, front →)

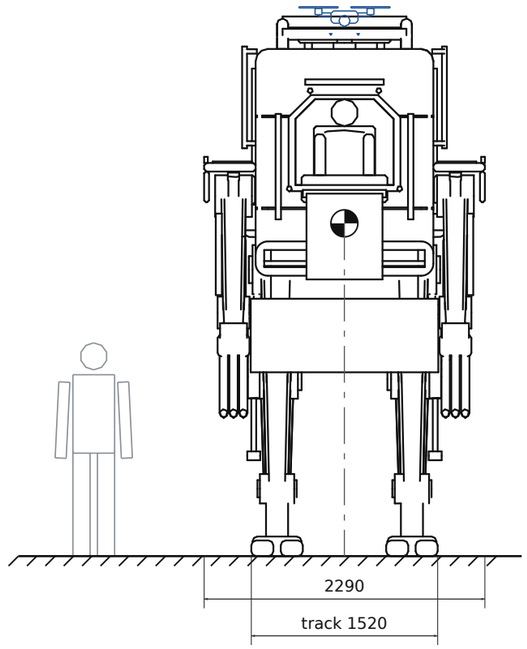

FRONT VIEW (from the front)



third-angle

PROJECT SUSANOO · SUS-M1 / SUS-A1 / SUS-I1

CL-05-carry · Reverse-jointed pod biped, claw arms, rear dock — CARRYING A LOAD


DRAWING	SCALE / SHEET	UNITS	REVISION
SUS-CAD-001-CL-05-carry	**1:50 · 420×297**	**mm**	**0.21-draft**
STATUS	DRAWN	SOURCE	LICENCE
CONCEPT, NOT REVIEWED	Claude (AI-drafted), I0	cad/params/CL-05.yaml	**CC BY 4.0**


Terms: AI = artificial intelligence (here, an AI assistant drafting at independence level I0) · CC = Creative Commons; CC BY 4.0 is the Creative Commons Attribution 4.0 licence used for the documentation · CG = centre of gravity · CL-nnn = concept layout (cad/params/CL-nn.yaml; CL-01 to CL-05, CL-05 the reference layout) · I0–I3 = review independence level (I0 none, e.g. the author or an AI, to I3 independent organisation) · SUS-A1 = dockable observation UAV · SUS-CAD-001 = the concept layouts document (cad/README.md); its drawing sheets are SUS-CAD-001-CL-nn · SUS-I1 = integrated mechanized walker and observation UAV · SUS-M1 = piloted walker · UAV = uncrewed aerial vehicle (drone)

NOTES


1. Concept layout for review and alignment. Placeholder geometry: not a design, not for manufacture.
2. Dimensions in millimetres; scale 1:50 on a 420 × 297 mm sheet. Third-angle projection.
3. Centre of gravity uses placeholder effective densities (cad/params/common.yaml).
4. Static margin: shortest distance from CG to the support-polygon edge; tip angle = atan(margin / CG height).
5. Docked rotor to pilot 1090; UAV drawn in blue; 1.75 m person in grey.

PLAN (from above, front →)

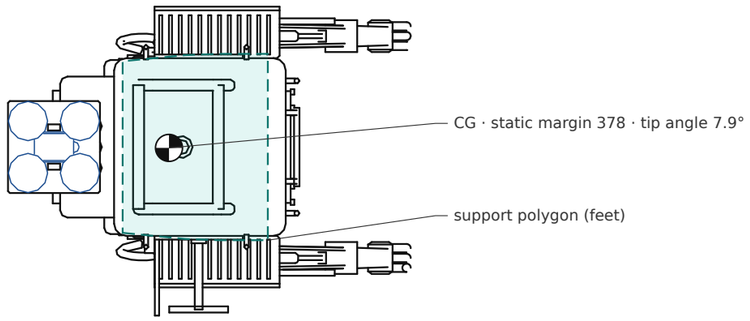

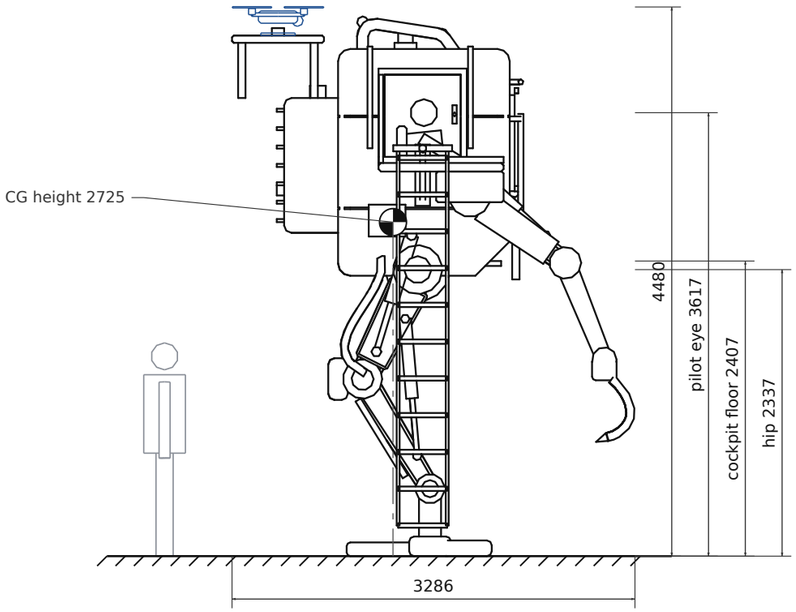

SIDE ELEVATION (from the right, front →)

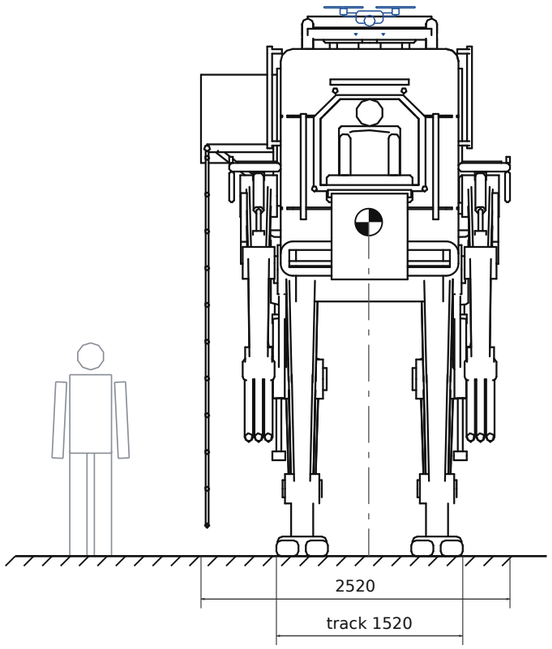

FRONT VIEW (from the front)

third-angle

PROJECT SUSANOO · SUS-M1 / SUS-A1 / SUS-I1

CL-05-emergency · Reverse-jointed pod biped, claw arms, rear dock — EMERGENCY EXIT


DRAWING	SCALE / SHEET	UNITS	REVISION
SUS-CAD-001-CL-05-emergency	**1:50 · 420×297**	**mm**	**0.21-draft**
STATUS	DRAWN	SOURCE	LICENCE
CONCEPT, NOT REVIEWED	Claude (AI-drafted), I0	cad/params/CL-05.yaml	**CC BY 4.0**


Terms: AI = artificial intelligence (here, an AI assistant drafting at independence level I0) · CC = Creative Commons; CC BY 4.0 is the Creative Commons Attribution 4.0 licence used for the documentation · CG = centre of gravity · CL-nnn = concept layout (cad/params/CL-nn.yaml; CL-01 to CL-05, CL-05 the reference layout) · I0–I3 = review independence level (I0 none, e.g. the author or an AI, to I3 independent organisation) · SUS-A1 = dockable observation UAV · SUS-CAD-001 = the concept layouts document (cad/README.md); its drawing sheets are SUS-CAD-001-CL-nn · SUS-I1 = integrated mechanized walker and observation UAV · SUS-M1 = piloted walker · UAV = uncrewed aerial vehicle (drone)

NOTES


1. Concept layout for review and alignment. Placeholder geometry: not a design, not for manufacture.
2. Dimensions in millimetres; scale 1:50 on a 420 × 297 mm sheet. Third-angle projection.
3. Centre of gravity uses placeholder effective densities (cad/params/common.yaml).
4. Static margin: shortest distance from CG to the support-polygon edge; tip angle = atan(margin / CG height).
5. Docked rotor to pilot 1090; UAV drawn in blue; 1.75 m person in grey.

PLAN (from above, front →)

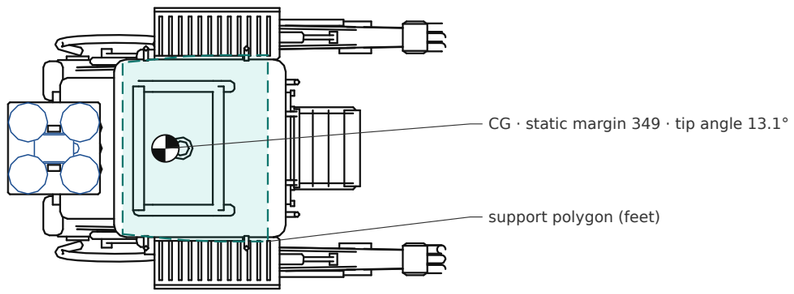

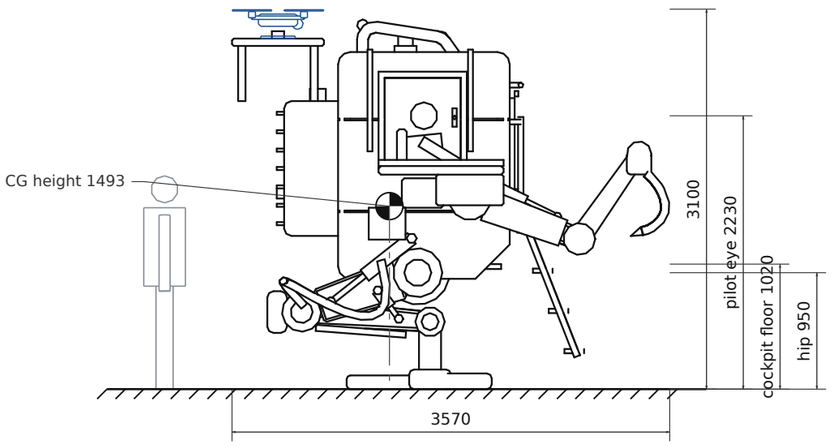

SIDE ELEVATION (from the right, front →)

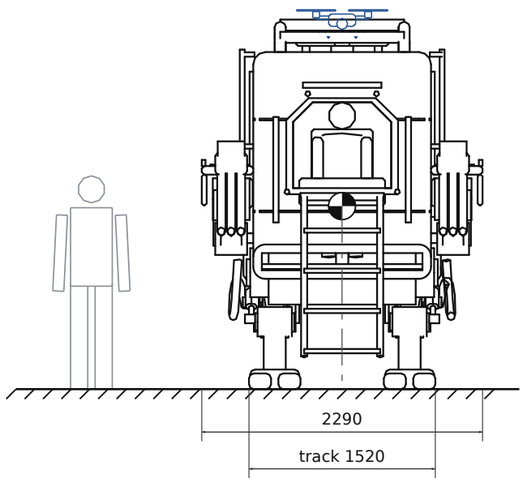

FRONT VIEW (from the front)

third-angle

PROJECT SUSANOO · SUS-M1 / SUS-A1 / SUS-I1

CL-05-kneel · Reverse-jointed pod biped, claw arms, rear dock — KNEELING FOR EGRESS


DRAWING	SCALE / SHEET	UNITS	REVISION
SUS-CAD-001-CL-05-kneel	**1:50 · 420×297**	**mm**	**0.21-draft**
STATUS	DRAWN	SOURCE	LICENCE
CONCEPT, NOT REVIEWED	Claude (AI-drafted), I0	cad/params/CL-05.yaml	**CC BY 4.0**


Terms: AI = artificial intelligence (here, an AI assistant drafting at independence level I0) · CC = Creative Commons; CC BY 4.0 is the Creative Commons Attribution 4.0 licence used for the documentation · CG = centre of gravity · CL-nnn = concept layout (cad/params/CL-nn.yaml; CL-01 to CL-05, CL-05 the reference layout) · I0–I3 = review independence level (I0 none, e.g. the author or an AI, to I3 independent organisation) · SUS-A1 = dockable observation UAV · SUS-CAD-001 = the concept layouts document (cad/README.md); its drawing sheets are SUS-CAD-001-CL-nn · SUS-I1 = integrated mechanized walker and observation UAV · SUS-M1 = piloted walker · UAV = uncrewed aerial vehicle (drone)

NOTES


1. Concept layout for review and alignment. Placeholder geometry: not a design, not for manufacture.
2. Dimensions in millimetres; scale 1:50 on a 420 × 297 mm sheet. Third-angle projection.
3. Centre of gravity uses placeholder effective densities (cad/params/common.yaml).
4. Static margin: shortest distance from CG to the support-polygon edge; tip angle = atan(margin / CG height).
5. Docked rotor to pilot 1090; UAV drawn in blue; 1.75 m person in grey.

PLAN (from above, front →)

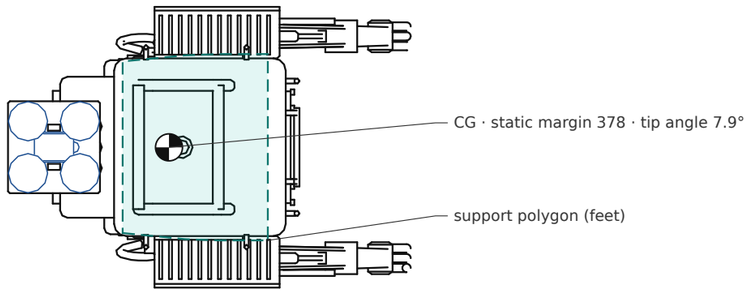

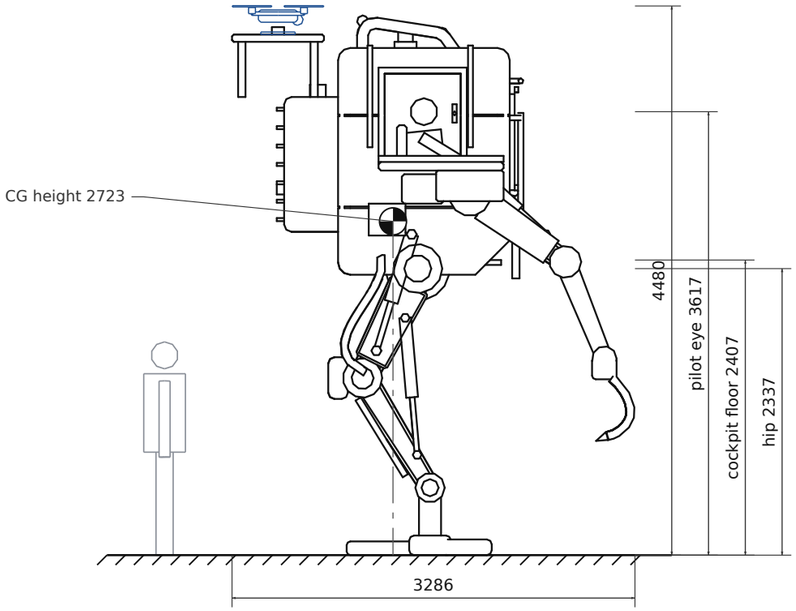

SIDE ELEVATION (from the right, front →)

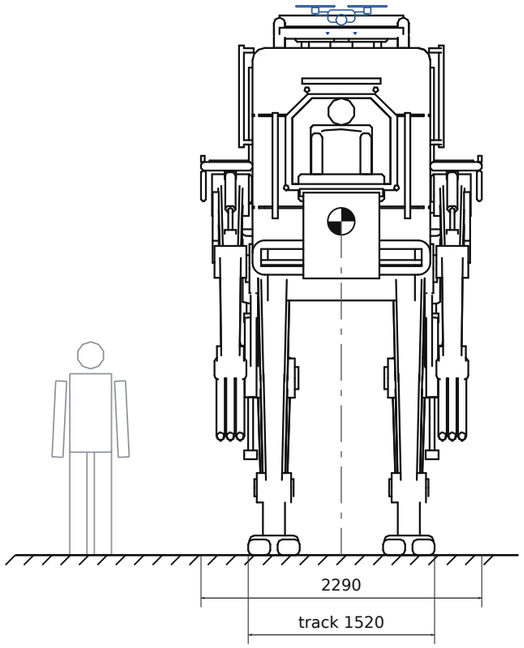

FRONT VIEW (from the front)

third-angle

PROJECT SUSANOO · SUS-M1 / SUS-A1 / SUS-I1

CL-05 · Reverse-jointed pod biped, claw arms, rear dock

DRAWING	SCALE / SHEET	UNITS	REVISION
SUS-CAD-001-CL-05	**1:50 · 420×297**	**mm**	**0.21-draft**
STATUS	DRAWN	SOURCE	LICENCE
CONCEPT, NOT REVIEWED	Claude (AI-drafted), I0	cad/params/CL-05.yaml	**CC BY 4.0**

Terms: AI = artificial intelligence (here, an AI assistant drafting at independence level I0) · CC = Creative Commons; CC BY 4.0 is the Creative Commons Attribution 4.0 licence used for the documentation · CG = centre of gravity · CL-nnn = concept layout (cad/params/CL-nn.yaml; CL-01 to CL-05, CL-05 the reference layout) · I0–I3 = review independence level (I0 none, e.g. the author or an AI, to I3 independent organisation) · SUS-A1 = dockable observation UAV · SUS-CAD-001 = the concept layouts document (cad/README.md); its drawing sheets are SUS-CAD-001-CL-nn · SUS-I1 = integrated mechanized walker and observation UAV · SUS-M1 = piloted walker · UAV = uncrewed aerial vehicle (drone)