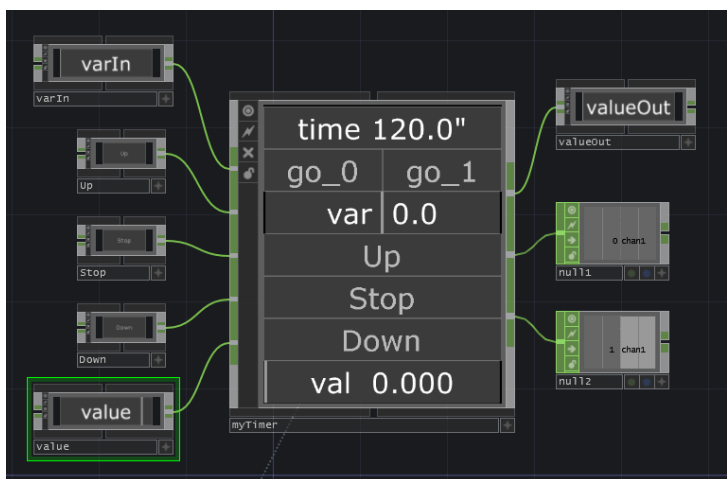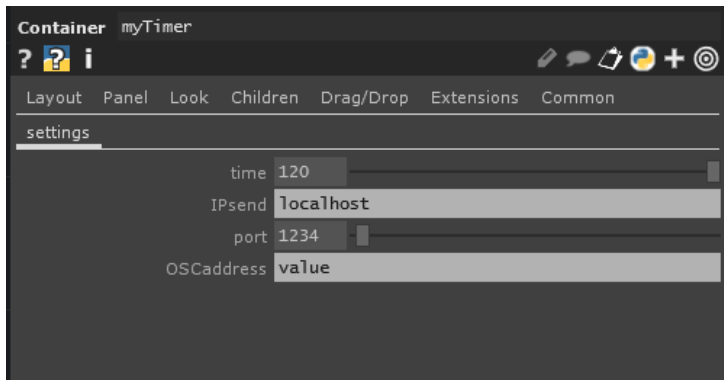# TD_myTimer version 1.0

A simple minimal timer.

- As a .tox, import it into your network.

- Adjust the time in seconds in the parameters (/settings)

- if you need OSC, write in the settings: IP target / port of the receiving software / OSC address (without the begining slash). The name of the output channel will be the same.

The output is between 0 and 1

- Time (no seting)

- Go to 0 or 1 and stop the timer

- Change the speed between -2 and +2

- Start rising

- Stop

- Start descending

- Value (geting and seting)

On the left side, there is labeled inputs:

- Variable speed

- Up

- Stop

- Down

- Value

On the right side, there is labeled outputs

- Value

- 0 arrival

- 1 arrival