

BENTONITE

PRODUCT DESCRIPTION

Bentonite is a natural, colloidal clay ranging in color from dark cream to brown. It is characterized by its high swelling capacity, absorption, high plasticity, and thixotropic properties, which provide great versatility across multiple industrial sectors.

Uses and applications:

- Due to its chemical properties, it is an excellent adsorbent, suspending, binding, and thickening agent used in various industrial applications.
- In glazes, it keeps pigments and ingredients in suspension due to its emulsifying capacity.
- In cements, it acts as a plasticizer, making mortars more workable and more impermeable.
- In water clarification processes, it is used as a coagulant, replacing commonly used aluminum sulfate.
- In soap formulations, its emulsifying power facilitates the incorporation of oils and fats, maintaining the body and translucent appearance of the soap.
- Grounding systems and sealing of seepage in lakes and ponds.

TECHNICAL CHARACTERISTIC


Physical Properties	
*Appearance	Powder material
Color	Dark cream to brown, according to standard
Water content (at 105°C)	Maximum 12%
Bulk density	1,15 - 1,25 g/mL

Chemical Properties	
* Silicon, as SiO ₂	53% – 68%
* Aluminum, as Al ₂ O ₃	18% – 23%
Water absorption (swelling capacity)	2 – 4 mL/g
* Loss on ignition at 1000°C	Maximum 12%
*pH-value	9 - 11

Particle Size Distribution	
Retained on 200 mesh (75 μm)	Maximum 12%
Retained on 325 mesh (45 μm)	Maximum 32%
* Average particle size (d10)	5 μm – 7 μm
* Average particle size (d50)	27 μm – 29 μm
* Average particle size (d90)	77 μm – 87 μm

*These properties are reported in the Certificate of Analysis upon customer request.

PARTICLE SIZE DISTRIBUTION GRAPH

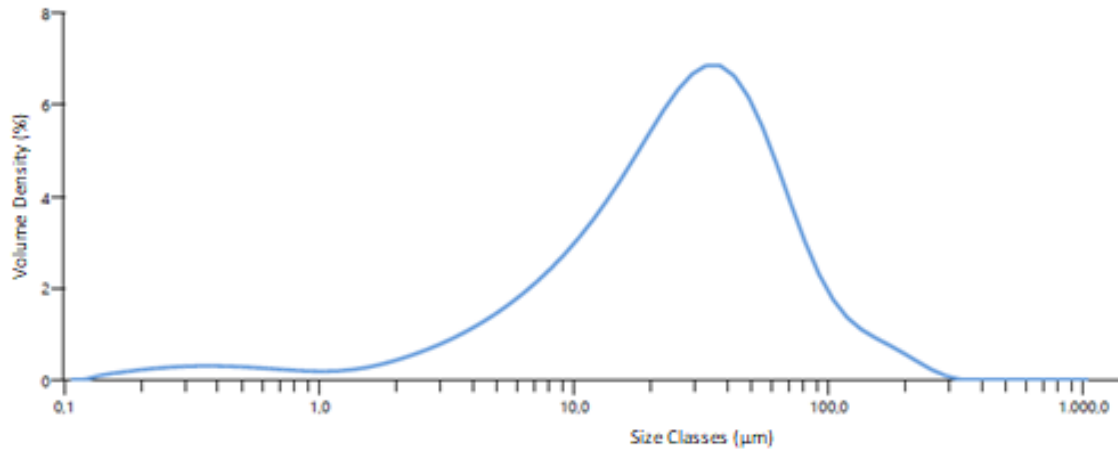

NOTE: The reported particle size distribution corresponds to the analyzed batch.

PACKAGING:

25 kg bags and 900 kg big bags

RECOMMENDATIONS

- The product should be stored in covered, dry, and well-ventilated areas, protected from ambient moisture and direct contact with the ground. It is recommended to keep the material in its original, hermetically sealed packaging and placed on pallets. These storage conditions ensure product stability and prevent agglomeration or degradation of its physicochemical properties.

SHELF LIFE

One (1) year from the manufacturing date, provided that the product is stored in its original, sealed packaging and protected from moisture.

www.impadoc.com

TECHNICAL ASSISTANCE

IMPADOC S.A. works closely with its customers through its technical team to ensure optimal knowledge and proper use of products for the construction and industrial sectors. If you have any questions or suggestions, please contact us at: asistenciatecnica@impadoc.com

The information provided in this document corresponds to data on the characteristics of the products supplied by IMPADOC S.A. and does not guarantee correct use by the customer. Sales are made subject to compliance with the product specifications and independently of the specific uses applied. If any non-compliance with the contractual conditions is detected, the customer has thirty (30) days from the date of dispatch to submit the corresponding claim, provided that the product has been stored under proper conditions.