Cache Control

HW 4 – due Friday 10/25

No class Friday 10/18
Fall break!

Philipp Koehn

~~4 April 2018~~
16 Oct 2019

Memory Tradeoff

- Fastest memory is on same chip as CPU

  ... but it is not very big (say, 32 KB in L1 cache)

- Slowest memory is DRAM on different chips

  ... but can be very large (say, 256GB in compute server)

- Goal: illusion that large memory is fast

- Idea: use small memory as cache for large memory

Simplified View

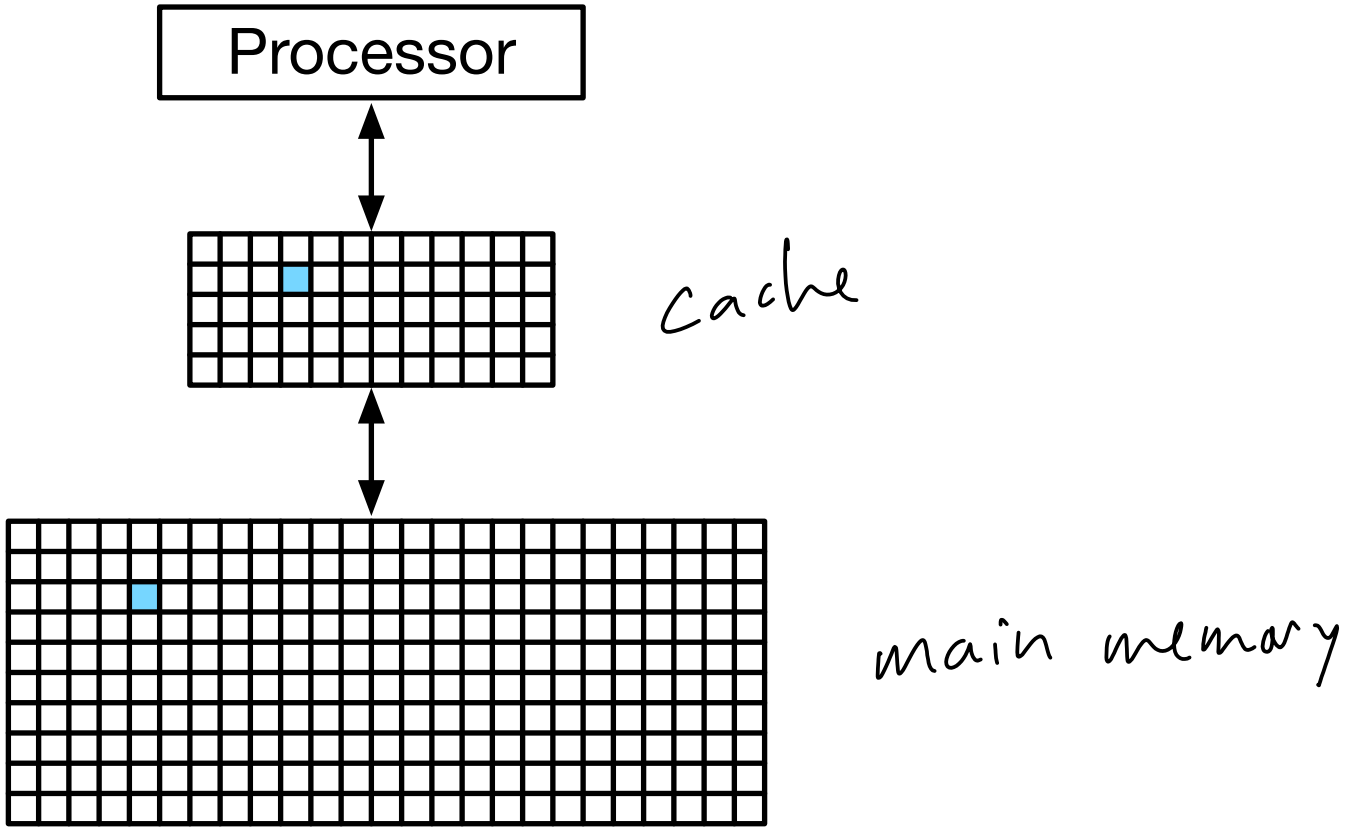

Smaller memory mirrors some of the large memory content

Direct Mapping

- Idea: keep mapping from cache to main memory simple

⇒ Use part of the address as index to cache

- Address broken up into 3 parts
  - memory position in block (offset)
  - index
  - tag to identify position in main memory

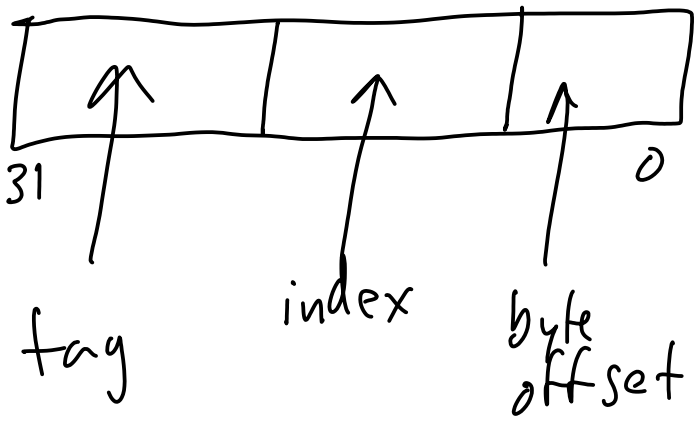

- If blocks with same index are used, older one is overwritten

eviction

Direct Mapping: Example

- Main memory address (32 bit)

  0010 0011 1101 1100 0001 0011 1010 1111

- Block size: 256 bytes (8 bits)

- Cache size: 1MB (20 bits)

"position" in cache

0010 0011 1101	1100 0001 0011	1010 1111
Tag	Index	Offset

Cache Organization

- Mapping of the address

0010 0011 1101	1100 0001 0011	1010 1111
Tag	Index	Offset

- Cache data structure

For direct-mapped "slot" = "set" (single entry)

Index 4096 slots	Tag (12 bits)	Valid (1 bit)	Data 256 bytes
000			
001			
002			
...	...	...	...
fff			

cache read

a.k.a. load

Cache Hit

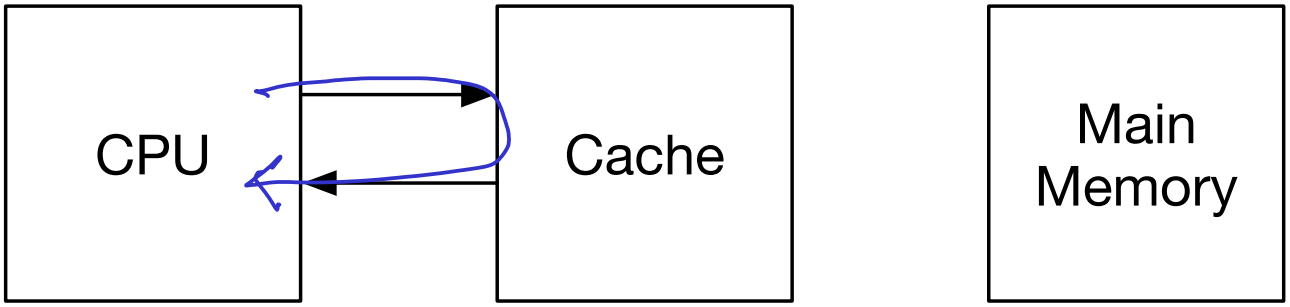

- Memory request from CPU
- Data found in cache
- Send data to CPU

Cache Circuit

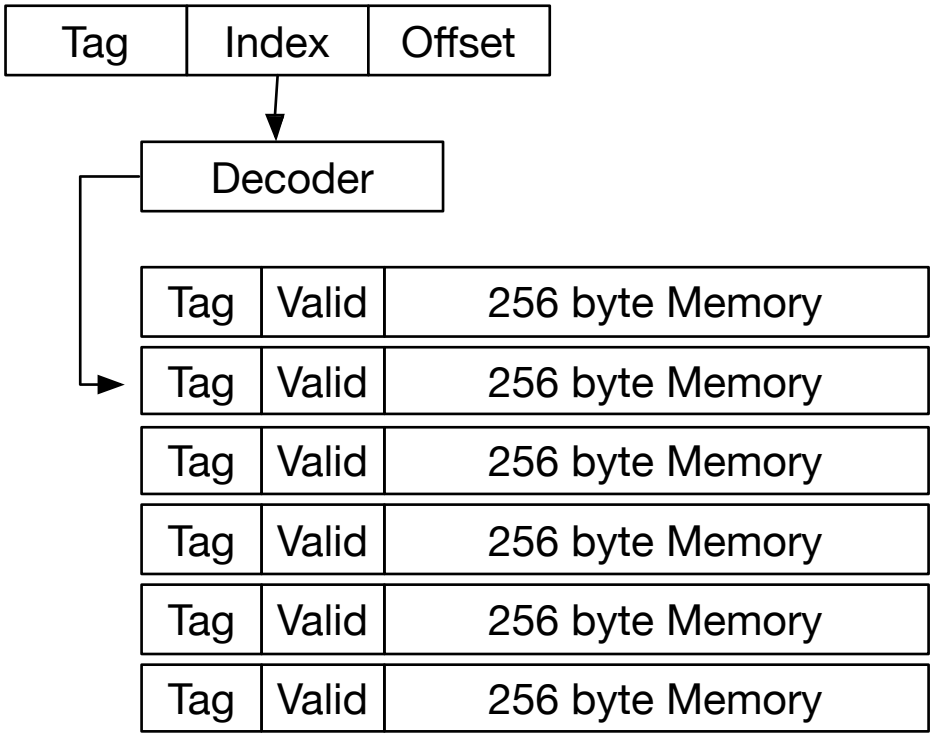

- Address split up into tag, index, and offset
- Index contains address of block in cache
- Decoded to select correct row

Cache Circuit

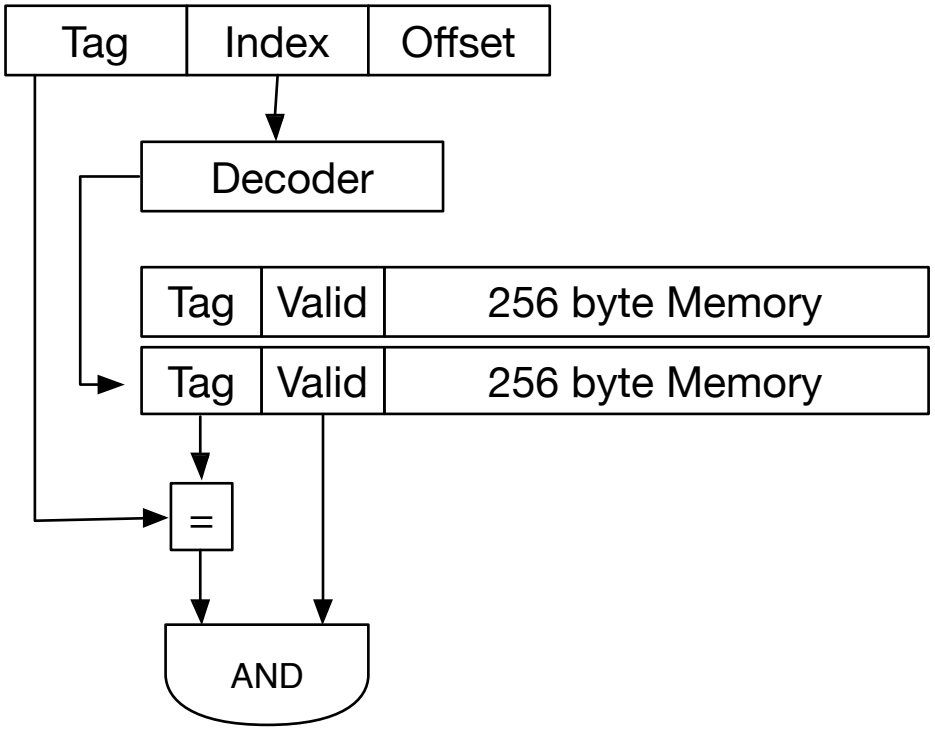

- Check tag for equality
- Check if valid bit is set

Cache Circuit

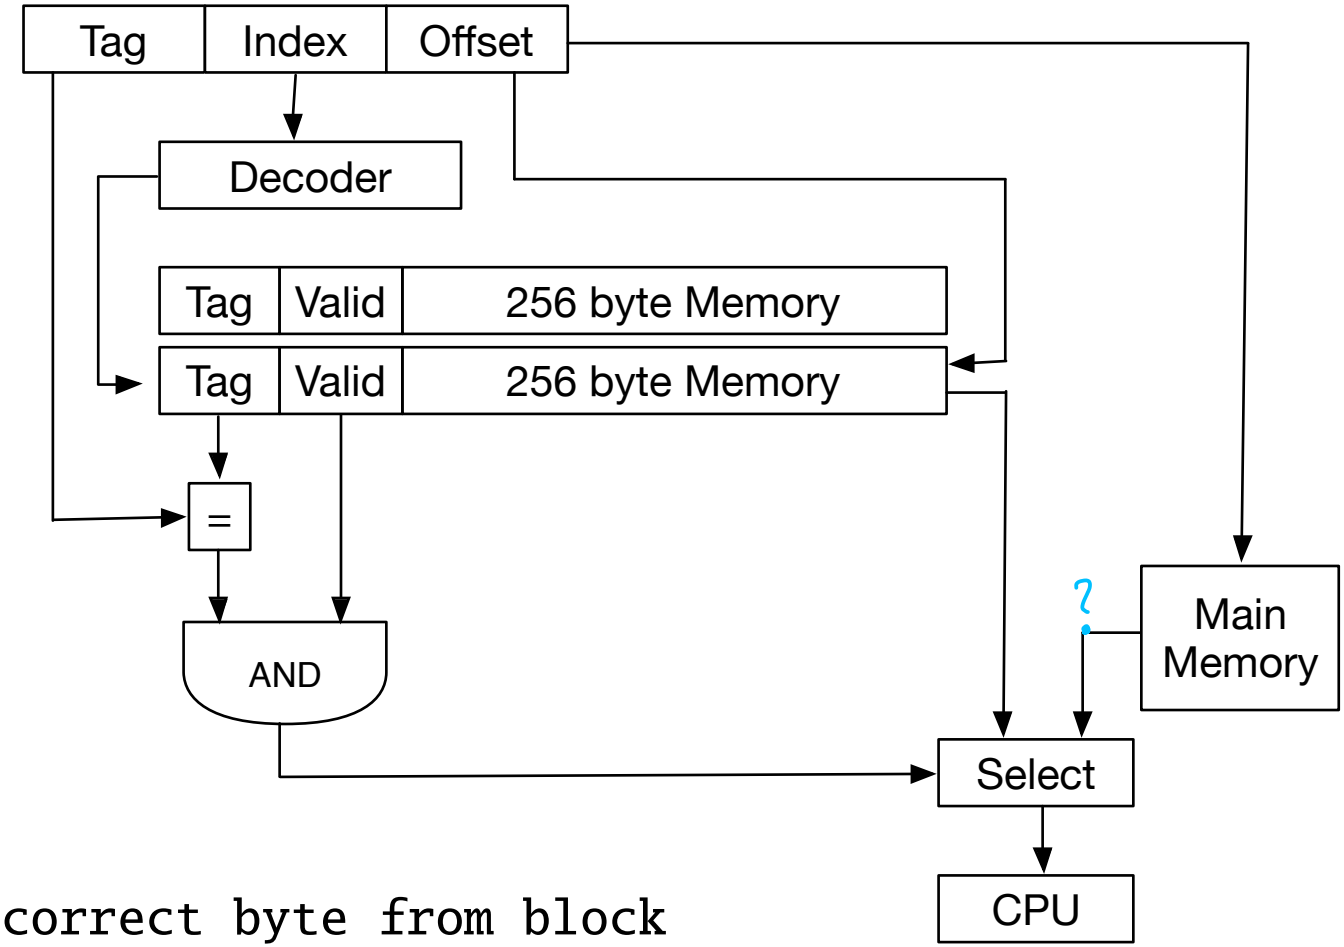

- Retrieve correct byte from block (identified by offset)
- Use cache only if valid and correct tag

cache miss

Cache Miss

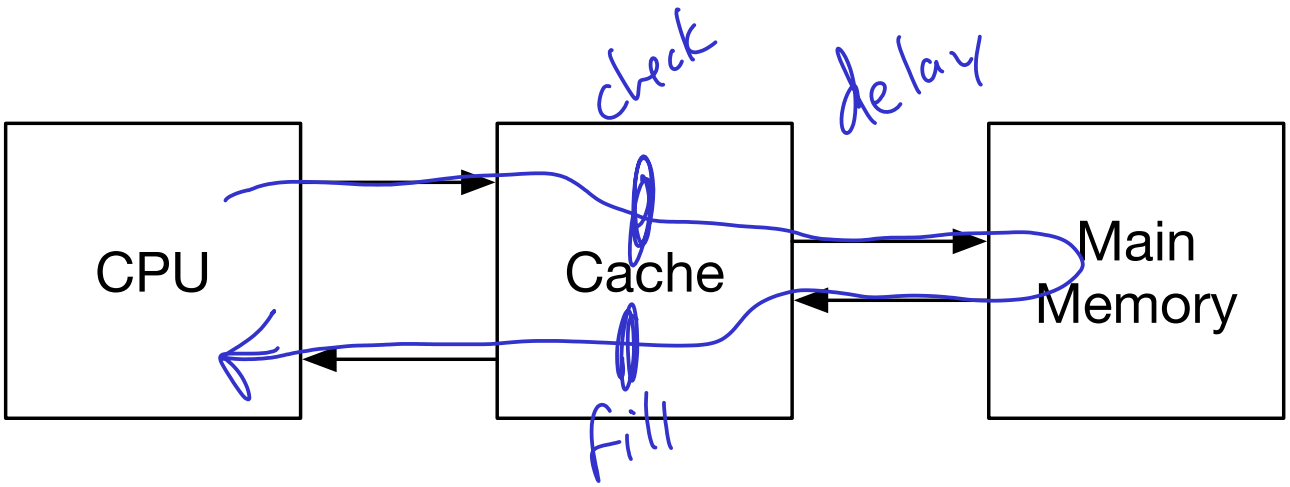

- Memory request from CPU
- Data **not** found in cache
- Memory request from cache to main memory
- Send data from memory to cache
- Store data in cache
- Send data to CPU

Cache Miss

- Requires load of block from main memory
- Blocks execution of instructions
- Recall discussion of memory access speeds
  - CPU clock cycle: 3 GHz $\rightarrow$ 0.33ns per instruction
  - DRAM speeds: 50ns

$\Rightarrow$ Significant delay (150 instruction cycles stalled)

Block Loading

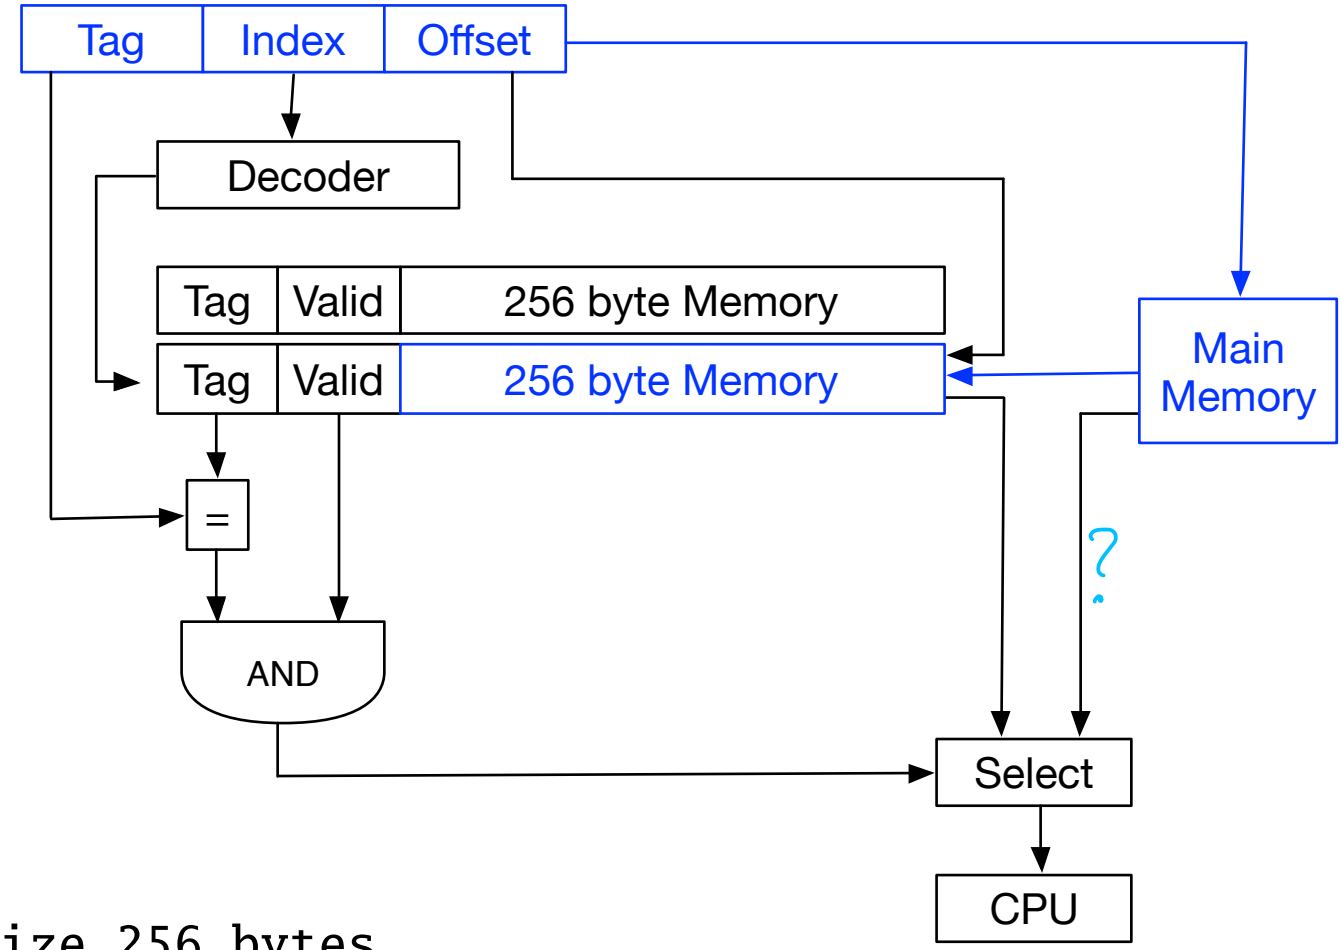

- Example
  - block size 256 bytes
  - request to read memory address $00d3ff53
- Cache miss triggers read of block $00d3ff00-$00d3ffff

Read $00d3ff53

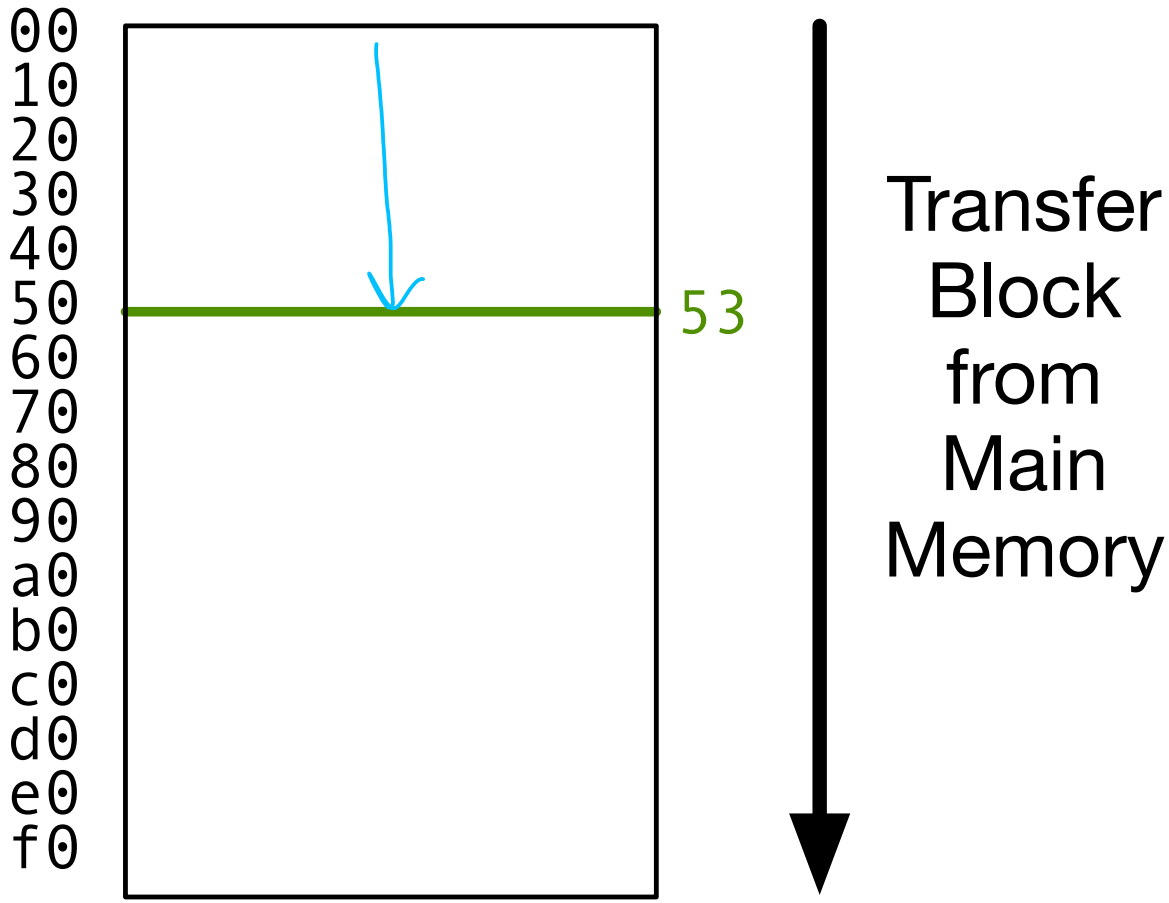

- But: this requires 53 read cycles before relevant byte is loaded

Better

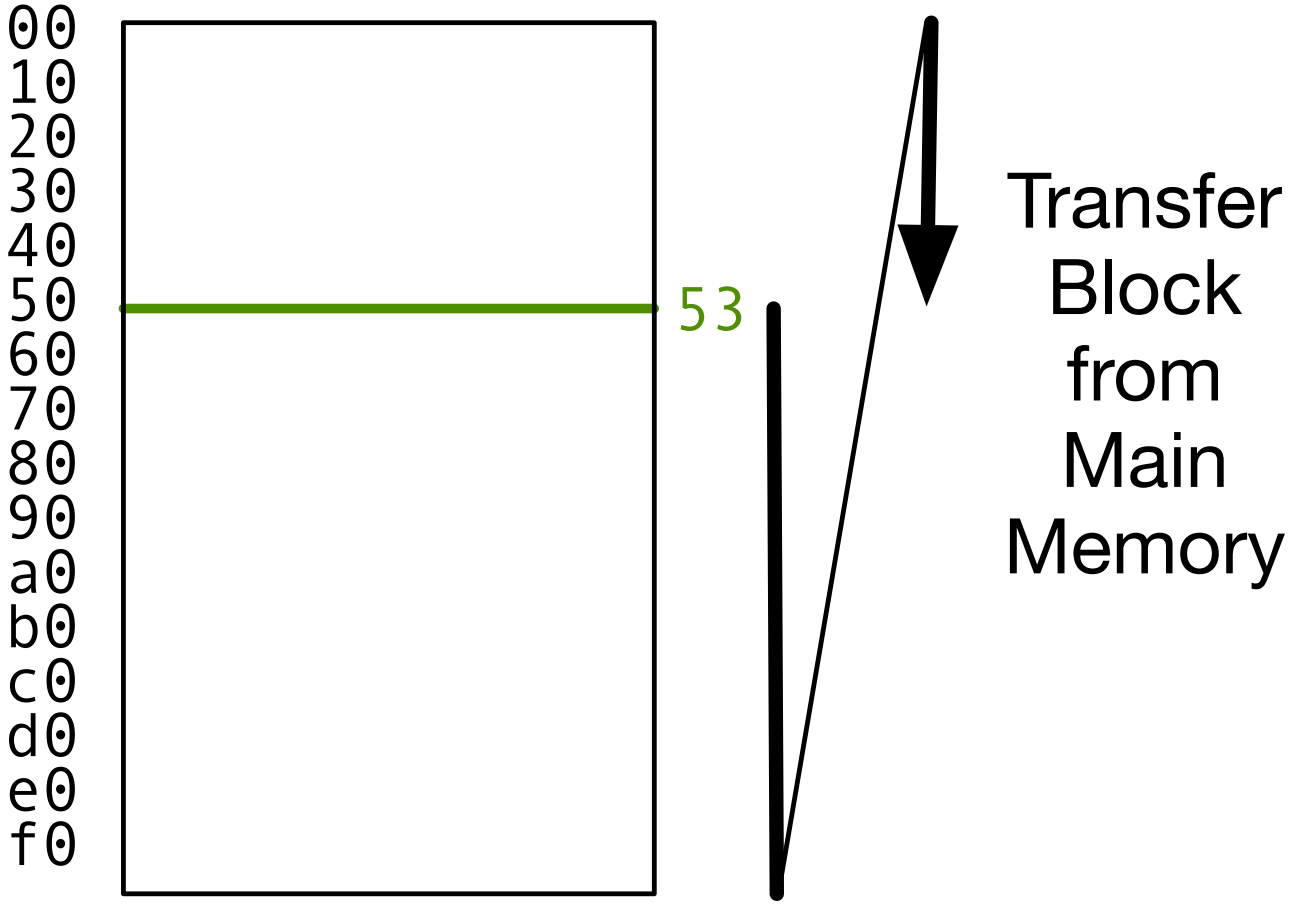

- Read requested byte first

cache simulator

→ do loads first

cache write

Write Through

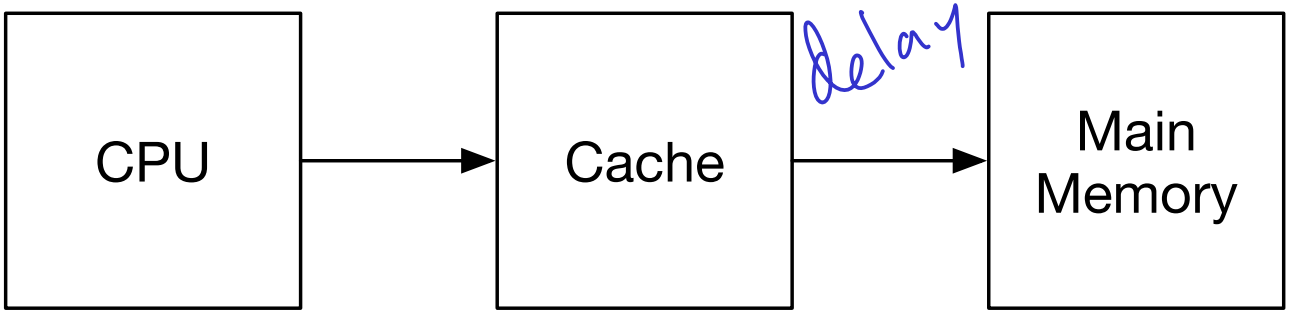

- Writes change value in cache
- Write through: immediately store changed value in memory
- Drawback: slows down **every** write

Write Back

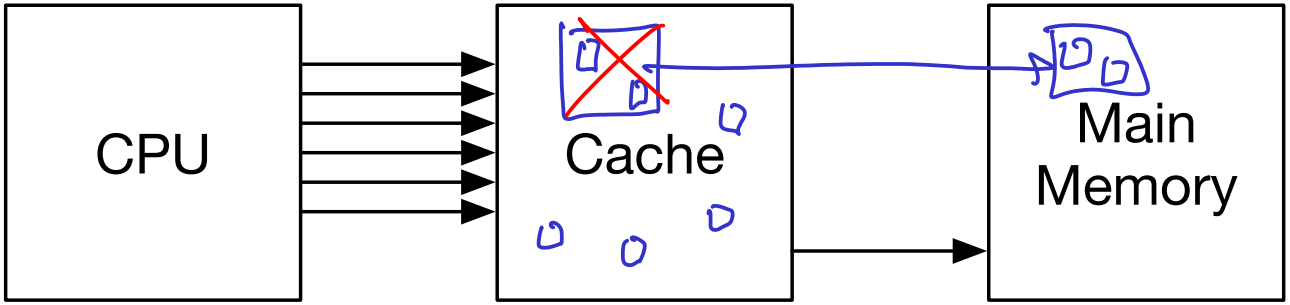

- Only change value in cache
- Record that cache block is changed with "dirty bit"
- Write back to RAM only when block is pre-empted

eviction

Write Buffer

queue of writes (addr + value)

- CPU does not need to wait for write to finish
- Write buffer
  - store value in write buffer
  - transfer values from write buffer to main memory in background
  - free write buffer
- This works fine, unless process overloads write buffer

Q: what if addr in write buffer is read?

Write Miss

- Problem: CPU writes to address X, but X is not cached

"No write allocate" → just write to memory

- Need to load block into cache first?

- Write allocate
  - allocate cache slot
  - write in value for X
  - load remaining values from main memory
  - set dirty bit

} good for locality?

split cache

MIPS Pipeline

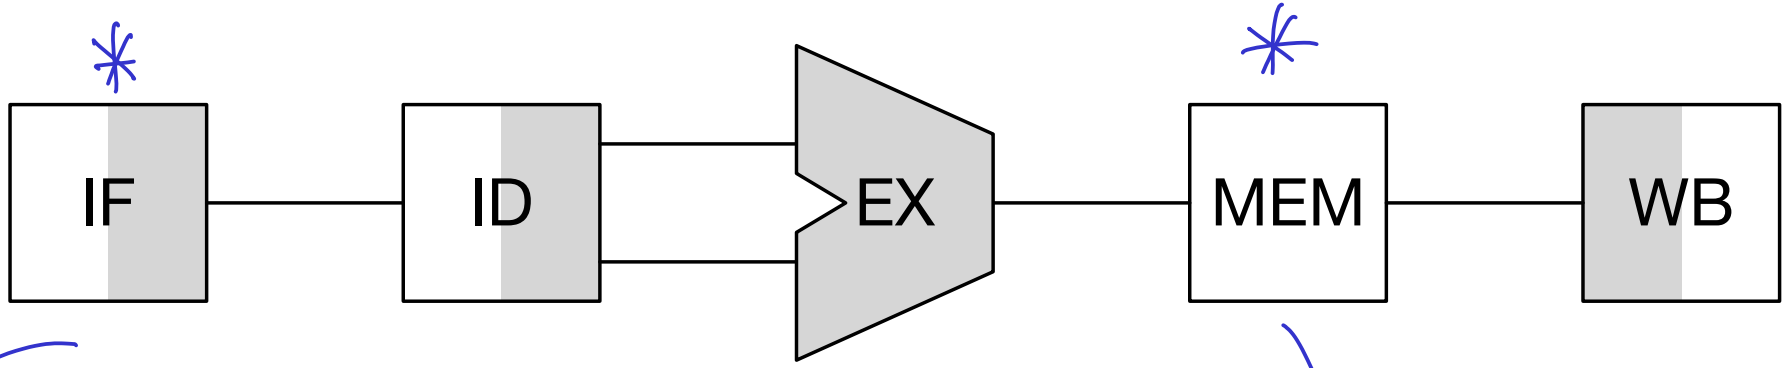

- 2 stages access memory
  - IF: instruction fetch loads current instruction
  - MEM: memory stage reads and writes data

$\Rightarrow$ 2 memory caches in processor

  - instruction memory
  - data memory

Architecture

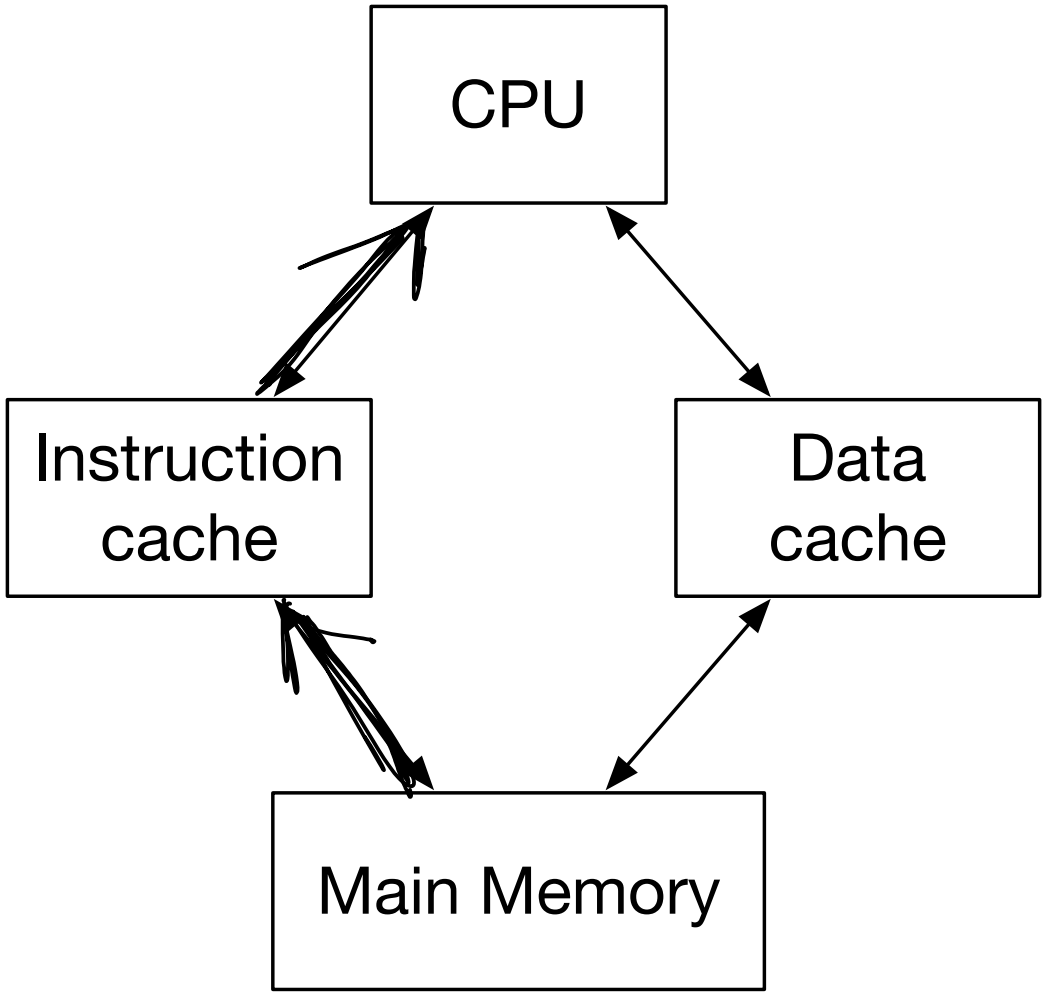

Comments

- IF and MEM operations can be executed simultanously
- Possible drawback: same memory block in both caches

  ... but very unlikely: code and data usually separated

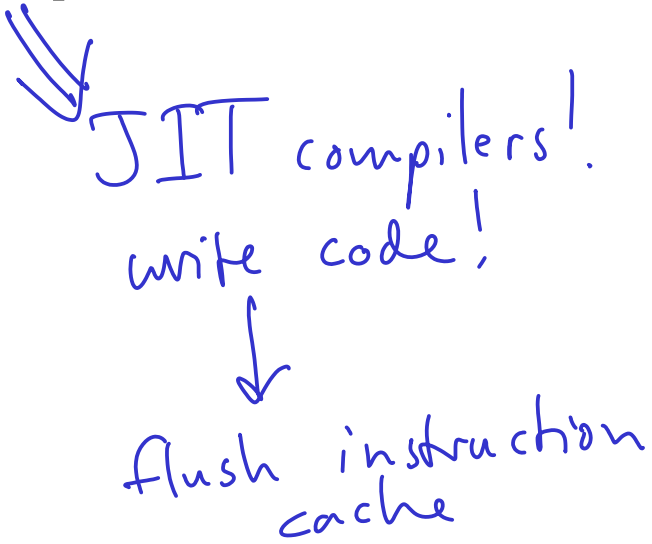

- Cache misses possible in both caches

  → contention for memory lookup, blocking

- Instruction cache simpler: no writes