Midterm Exam

601.229 Computer Systems Fundamentals

Spring 2020
Johns Hopkins University
Instructors: Xin Jin and David Hovemeyer

9 March 2020

Complete all questions.

Use additional paper if needed.

Time: 50 minutes.

Name of student: _____Solution_____

Q1. Integer representation   *20 points*

Powers of 2 ($2^y = x$):

y	0	1	2	3	4	5	6	7	8	9	10	11	12
x	1	2	4	8	16	32	64	128	256	512	1,024	2,048	4,096

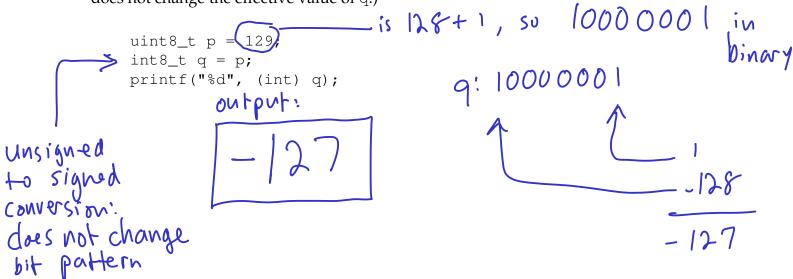| y	13	14	15
x	8,192	16,384	32,768

Assume that `int8_t` and `int16_t` are 8 and 16 bit signed integer types represented using two's complement, and `uint8_t` and `uint16_t` are 8 and 16 bit unsigned integer types.

(a) [6 points] Write the binary representations of the values `a`, `b`, and `c`.

```
uint8_t  a = 127, b = 128;
uint16_t c = 32 * 1024;
```

a: 01111111

b: 10000000

c: 1000 0000 0000 0000

(b) [6 points] Write the binary representations of the values `d`, `e`, and `f`.

```
int8_t  d = 127;
int8_t  e = -120;
int16_t f = e;
```

d: 0111 1111

e: 1000 1000

8
−128

f: 11111111 11 1000 1000

2

(c) [4 points] What output is printed by the following code? (Note that the cast to `int` does not change the effective value of q.)

```
uint8_t p = 129;
int8_t q = p;
printf("%d", (int) q);
```

is 128+1, so 1000 0001 in binary

q: 1000 0001

output:

-127

unsigned
to signed
conversion:
does not change
bit pattern

1 ⟶ -128
———
-127

(d) [4 points] What output is printed by the following code? (Note that the cast to `unsigned` does not change the effective value of s.)

```
uint16_t r = 267;
uint8_t s = r;
printf("%u", (unsigned) s);
```

267 mod 256 = 11

output:

11

Q2. Integer arithmetic   *20 points*

Assume that `int8_t`, `int16_t`, and `int32_t` are 8, 16, and 32 bit signed integer types represented using two's complement, and `uint8_t`, `uint16_t`, and `uint32_t` are 8, 16, and 32 bit unsigned integer types. Assume that signed overflow follows two's complement semantics.
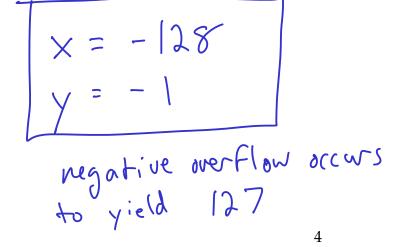
(a) [6 points] Given the following incomplete code:

```
uint8_t x = _____, y = _____;
assert(x + y < x);
```

State values for x and y that will make the assertion true.

$x = 255$
$y = 1$

8 bit unsigned addition would overflow to 0

note: we are assuming that x and y are not implicitly promoted (which they would be in an actual C program). Instead we're assuming 8 bit unsigned arithmetic.

(b) [6 points] Given the following incomplete code:

```
int8_t x = _____, y = _____;
assert(x < 0);
assert(y < 0);
assert(x + y > 0);
```

State values for x and y that will make the assertions true.

$x = -128$
$y = -1$

negative overflow occurs to yield 127

Again, assume implicit promotion occurs, and assume 8-bit signed arithmetic.

4

(c) [4 points] Consider the following C function:

```
int16_t negate16(int16_t x) {
    return -x;
}
```
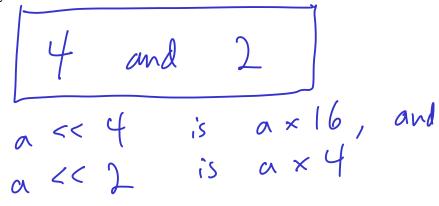
Also consider the following incomplete code:

```
int16_t y = _____;
assert( (int32_t) negate16(y) != -((int32_t) y) );
```

State a value for y that will make the assertion true. Explain briefly.

$$y = -32768$$

This value has no positive counterpart in 16 bit signed two's complement.

(d) [4 points] Consider the following incomplete function:

```
uint32_t times20(uint32_t a) {
    return (a << _____) + (a << _____);
}
```

State values that can be substituted for the two blanks so that the times20 function returns a value that is 20 times greater than its parameter a (ignoring the possibility of overflow). Explain briefly.

4   and   2

a << 4   is   a × 16,   and
a << 2   is   a × 4

5

Q3. x86-64 *50 points*

Things to know about x86-64 code:

- Arguments are passed in `%rdi, %rsi, %rdx, %rcx, %r8, %r9`

- The return value is returned in `%rax`

- `%r10` and `%r11` are caller-saved registers, which may change as a result of a function call (the argument registers are also effectively caller-saved)

- `%rbx, %rbp,` and `%r12–%r15` are callee-saved: functions modifying them must save and restore their values using `pushq` and `popq`, and they may be assumed *not* to change as a result of a function call

- Code should go in the `.text` section

- Global variables should go in the `.bss` or `.data` sections (`.data` allows data to be initialized)

- Read-only data such as string constants should go in the `.rodata` section

- Operand size suffixes are `b` (8 bit byte), `w` (16 bit word), `l` (32 bit long word), and `q` (64 bit quad word)

- Instructions may have at most one memory operand

- Indexed/scaled addressing is (RegA,RegB,Scale), and accesses address RegA + RegB×Scale, where Scale is 1, 2, 4, or 8

Selected registers and 8 bit sub-registers: Selected conditional jump instructions:

Register	8 bit sub-register
`%rax`	`%al` (same pattern for
	`%rbx, %rcx, %rdx`)
`%rdi`	`%dil`
`%rsi`	`%sil`
`%r8`	`%r8b` (same pattern for
	`%r9–%r15`)

Instruction	Meaning
`jl`	jump if less
`jg`	jump if greater
`jle`	jump if less than or equal
`jge`	jump if greater than or equal

Note that assigning to the 8 bit sub-register does *not* clear the other bits of the larger register.

[Actual problem is on the next page.]

Write an x86-64 assembly language function called `countLessThan` which takes three parameters `arr`, `n`, and `val`. The parameter `arr` is a pointer to an array of 64 bit signed integers. The parameter `n` is a single 64 bit integer which indicates the number of elements in the array that `arr` points to. The parameter `val` is a single 64 bit integer. The C function prototype for the function is the following:

```
long countLessThan(long *arr, long n, long val);
```

The `countLessThan` function should return a count of the number of elements in the array which are less than `val`.

Here are C test code showing the expected behavior of `countLessThan`:

```
long testArr[] = { -5, 6, -1, 8, 3, 8, 4, -5 };
ASSERT(4L == countLessThan(testArr, 8, 4));
```

Requirements and hints:

- Your function must follow correct register-use and calling conventions

- Remember that the first parameter is a pointer, and the array elements are in memory

- Index/scaled addressing may be useful

[Write your code in the next page(s).]

```
        .section .text

        .globl countLessThan
countLessThan:
        subq $8, %rsp          /* align stack*/

        movq $0, %rax          /* counter */
.Ltop:
        cmpq $0, %rsi          /* n ≤ 0 ? */
        jle    .Ldone          /* if so, done */

        cmpq %rdx, (%rdi)      /* is arr elt < val? */
        jge    .Ladvance       /* if not, don't inc. count */
        incq %rax              /* incr. count */
.Ladvance:
        addq $8, %rdi          /* advance to next elt. */
        decq %rsi              /* decr. n */
        jmp .Ltop


.Ldone:
        addq $8, %rsp          /* restore stack */
        ret                    /* return result in %rax*/
```

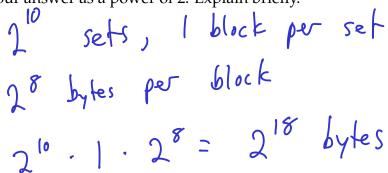[Continue your answer to Q3 on this page if necessary.]

Q4. Performance and caching   *10 points*

(a) [5 points] Assume that on a system with 32 bit addresses, the addresses have the following format:

14 bits	10 bits	8 bits
tag	index	offset

If the cache is direct-mapped, how many bytes of data can be stored in the cache? You may choose to express your answer as a power of 2. Explain briefly.

$$2^{10} \text{ sets, } 1 \text{ block per set}$$

$$2^8 \text{ bytes per block}$$

$$2^{10} \cdot 1 \cdot 2^8 = 2^{18} \text{ bytes}$$

(b) [5 points] Consider the following x86-64 instructions:

```
imulq %rdi, %rsi
imulq %rdx, %rcx
```

Is it possible for these instructions to execute in parallel on a CPU with multiple non-pipelined functional units capable of integer multiplication? Explain briefly.

yes, because there are no data dependences between them

[Use this page for scratch work if necessary.]