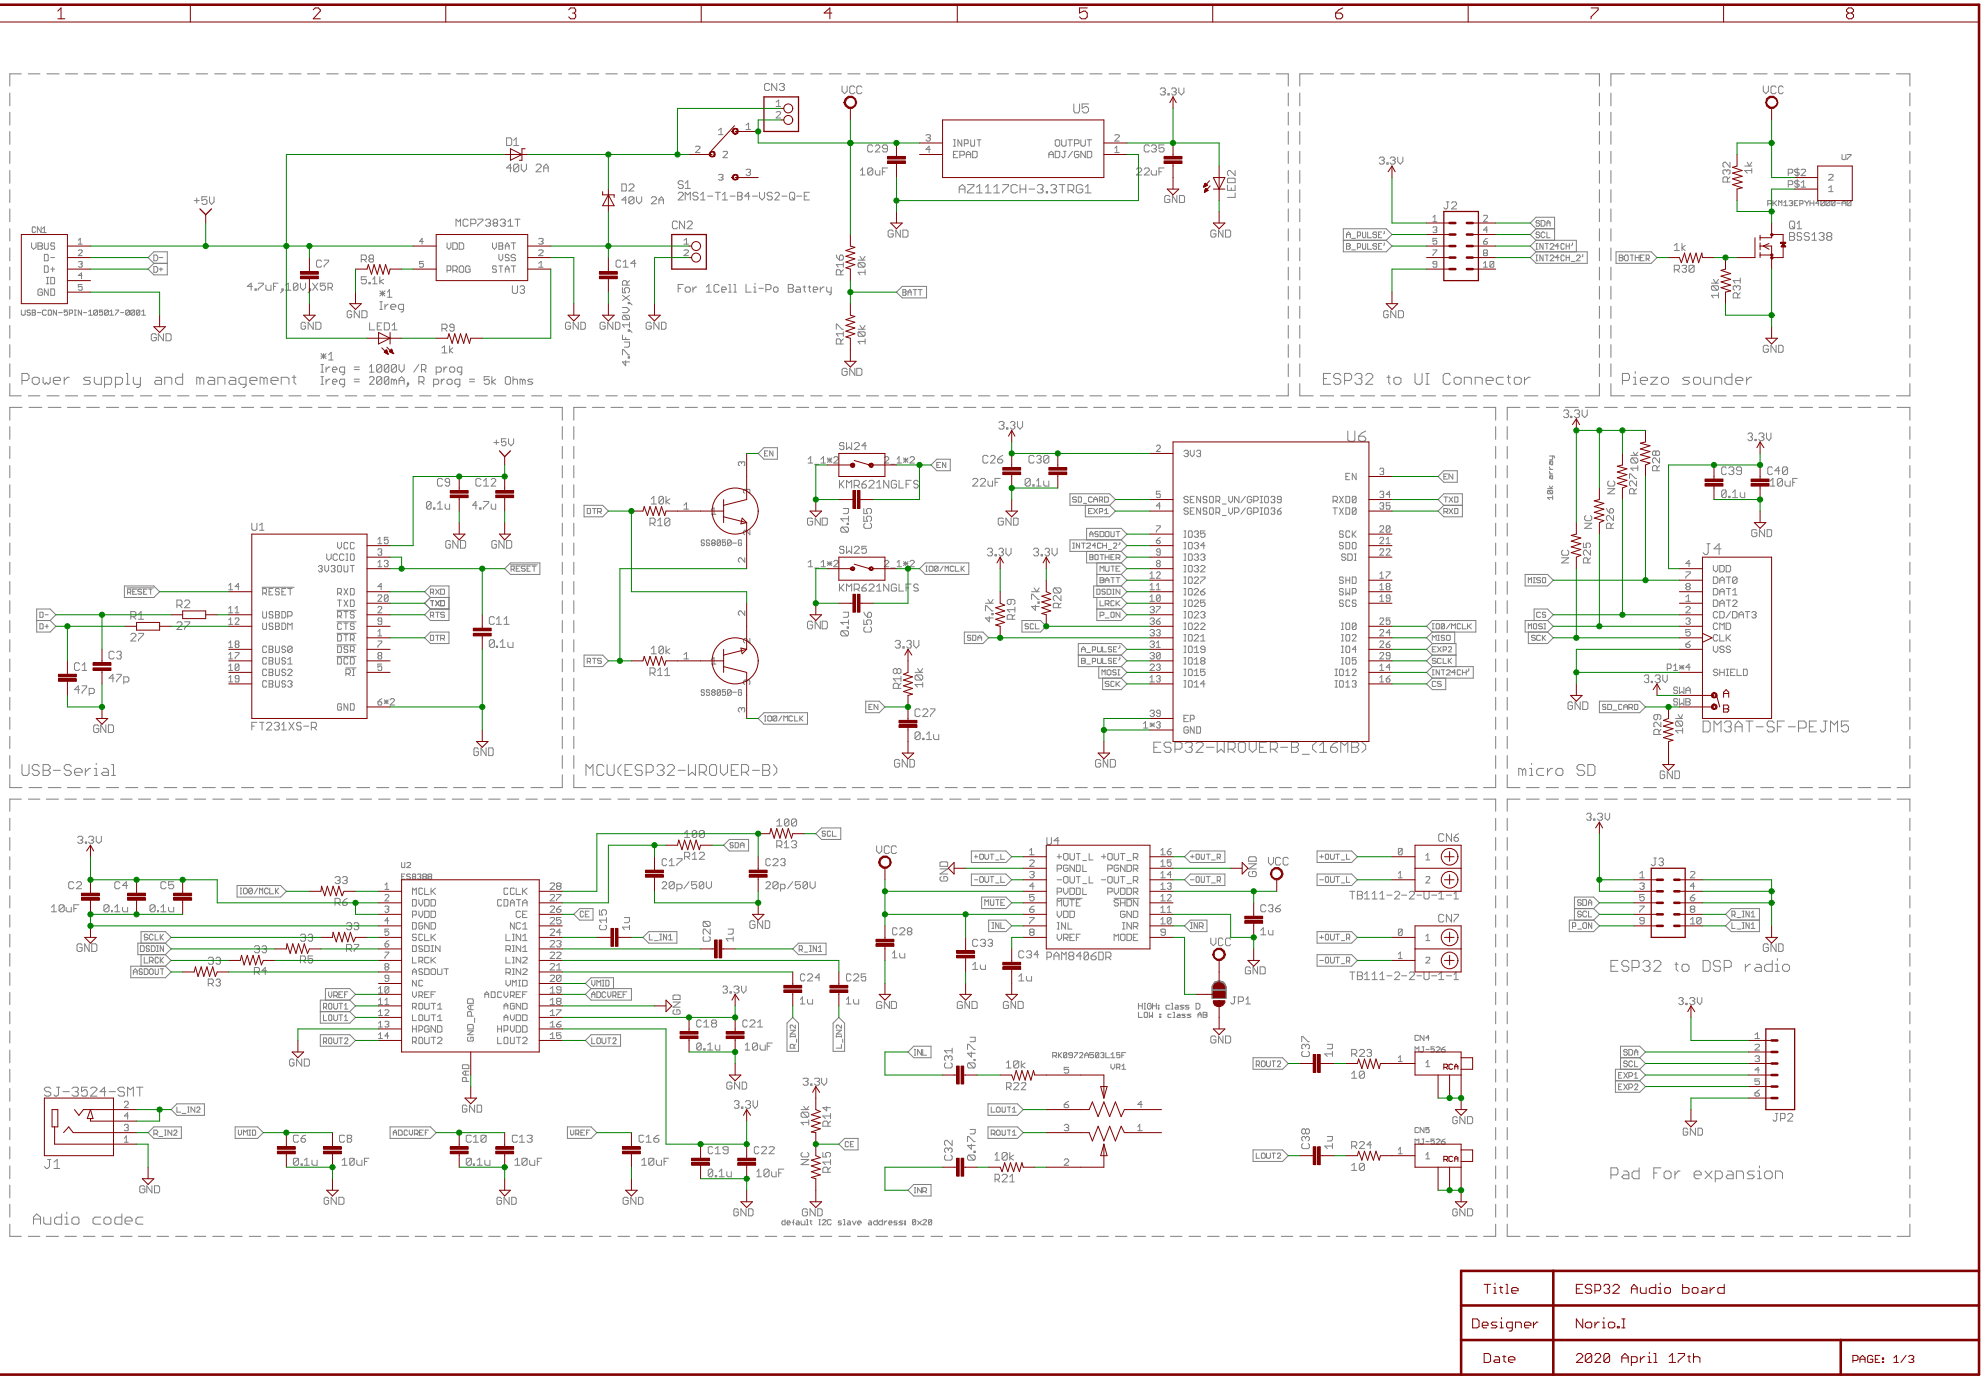
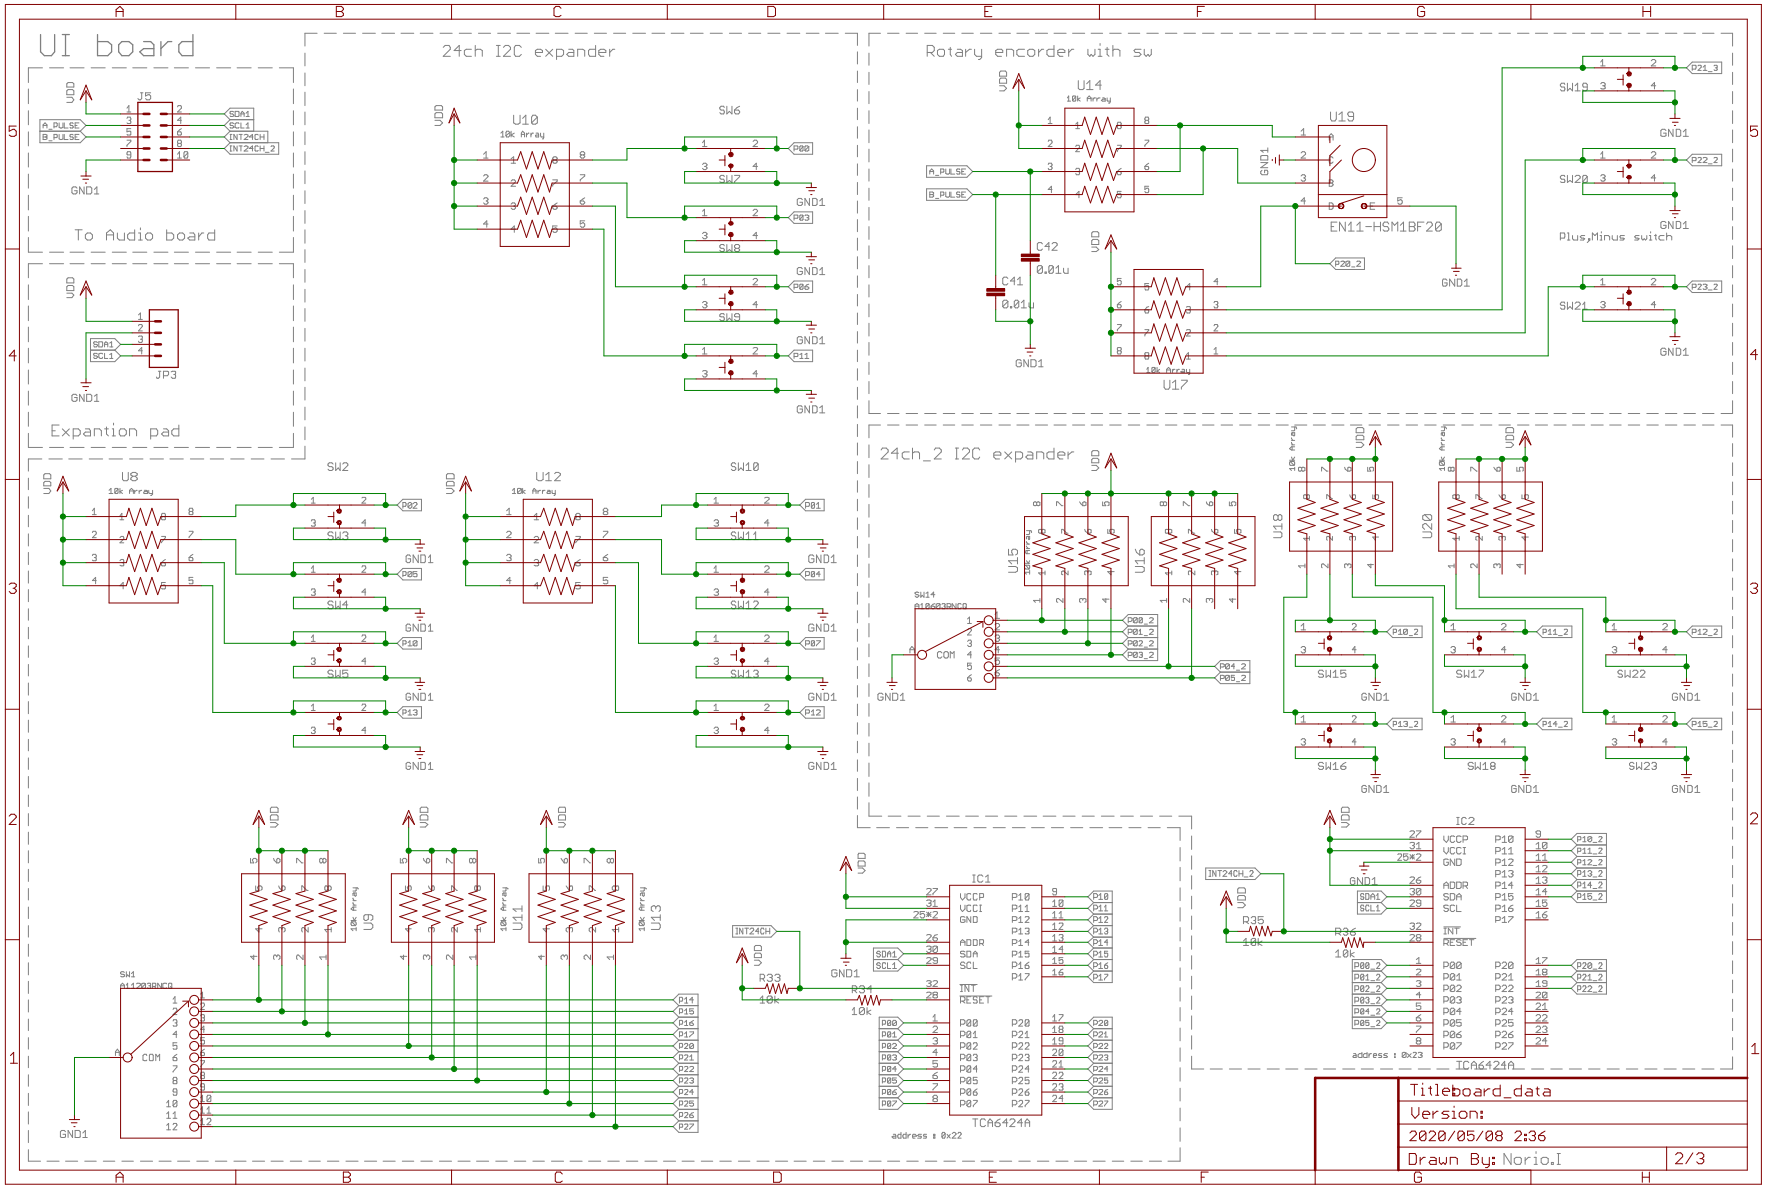
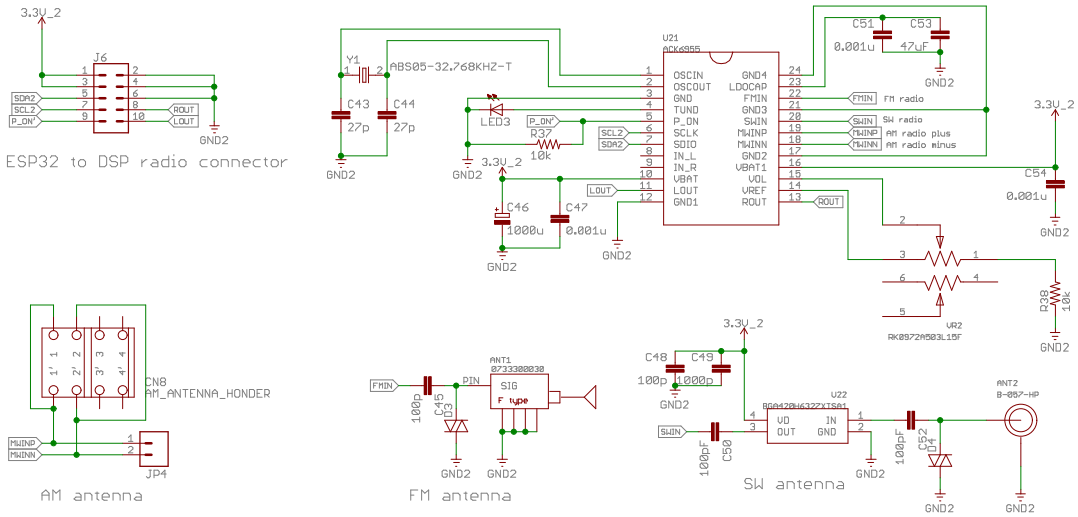

Power supply and management
ESP32 to UI Connector
Piezo sounder
USB-Serial
MCU(ESP32-WROVER-B)
micro SD
Audio codec
ESP32 to DSP radio
Pad For expansion
Ireg = 1000V /R prog
Ireg = 200mA, R prog = 5k Ohms
For 1Cell Li-Po Battery
default I2C slave address: 0x20
Title
ESP32 Audio board
Designer
Norio.I
Date
2020 April 17th
PAGE: 1/3


UI board
To Audio board
Expantion pad
24ch I2C expander
Rotary encorder with sw
24ch_2 I2C expander
Plus,Minus switch
EN11-HSM1BF20
TCA6424A
Titleboard_data
Version:
2020/05/08 2:36
Drawn By: Norio.I
2/3



DSP radio board

Title:	board_data
Version:	
2020/05/08 2:36	
Drawn By:	3/3