Distance Vector: link cost changes

Link cost changes:

- node detects local link cost change
- updates routing info, recalculates distance vector
- if DV changes, notify neighbors

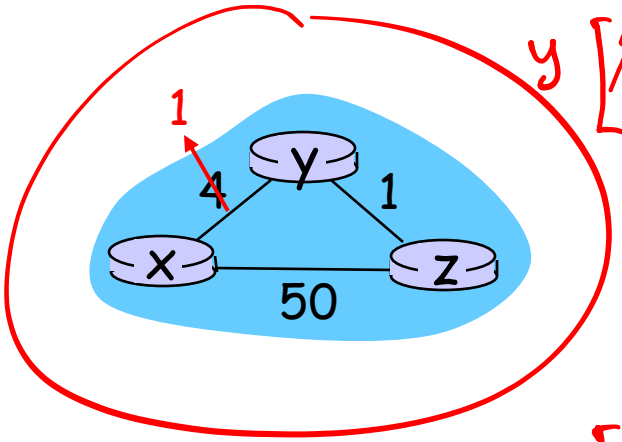

"good news travels fast"

At time t_0, y detects the link-cost change, updates its DV, and informs its neighbors.

At time t_1, z receives the update from y and updates its table. It computes a new least cost to x and sends its neighbors its DV.

At time t_2, y receives z's update and updates its distance table. y's least costs do not change and hence y does *not* send any message to z.

$d_x(y) = \min\{ 60+0 , 50+1 \} = 51$

Distance Vector: link cost changes

N = # of iterations until convergence

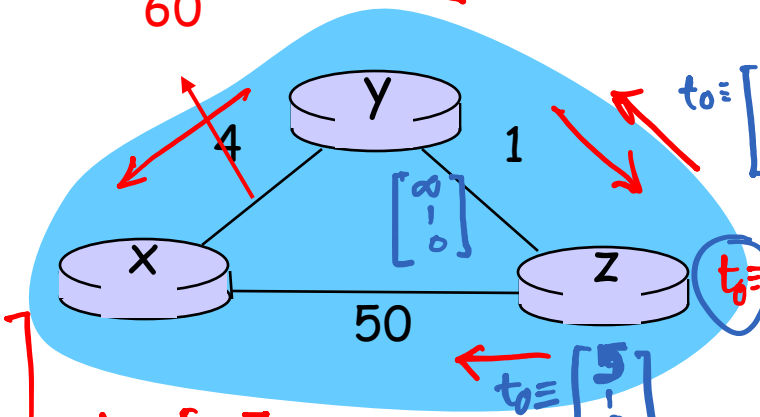

What happens now ?

$d_x(z) = \min\{ c(x,y) + d_y(z) , c(x,z) + d_z(z) \}$
$= \min\{ 60 + 1 , 50 + 0 \}$

Distance Vector: link cost changes

Link cost changes:

- good news travels fast
- bad news travels slow - "count to infinity" problem!
- 44 iterations before algorithm stabilizes: see text

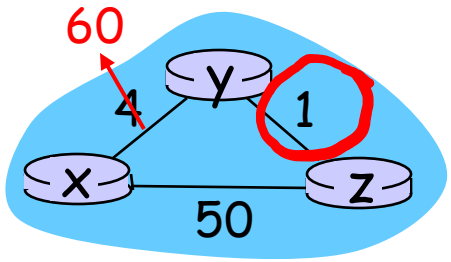

Poissoned reverse:

- If Z routes through Y to get to X :
  - Z tells Y its (Z's) distance to X is infinite (so Y won't route to X via Z)
- will this completely solve count to infinity problem?

Tradeoffs

What will you recommend ?

Link State?
Distance Vector?

There is no right answer

Comparison of LS and DV algorithms

Message complexity

- LS: with n nodes, E links, O(nE) msgs sent
- DV: exchange between neighbors only
  - convergence time varies

Speed of Convergence

- LS: $O(n^2)$ algorithm requires O(nE) msgs
  - may have oscillations
- DV: convergence time varies
  - may be routing loops
  - count-to-infinity problem

Robustness: what happens if router malfunctions?

LS:

- node can advertise incorrect *link* cost
- each node computes only its *own* table

DV:

- DV node can advertise incorrect *path* cost
- each node's table used by others
  - error propagate thru network

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing

Hierarchical Routing

Our routing study thus far - idealization

- all routers identical
- network "flat"

… *not* true in practice

scale: with 200 million destinations:

- can't store all dest's in routing tables!
- routing table exchange would swamp links!

administrative autonomy

- internet = network of networks
- each network admin may want to control routing in its own network

Hierarchical Routing

- aggregate routers into regions, "autonomous systems" (AS)
- routers in same AS run same routing protocol
  - "intra-AS" routing protocol
  - routers in different AS can run different intra-AS routing protocol

Gateway router

- Direct link to router in another AS

Interconnected ASes

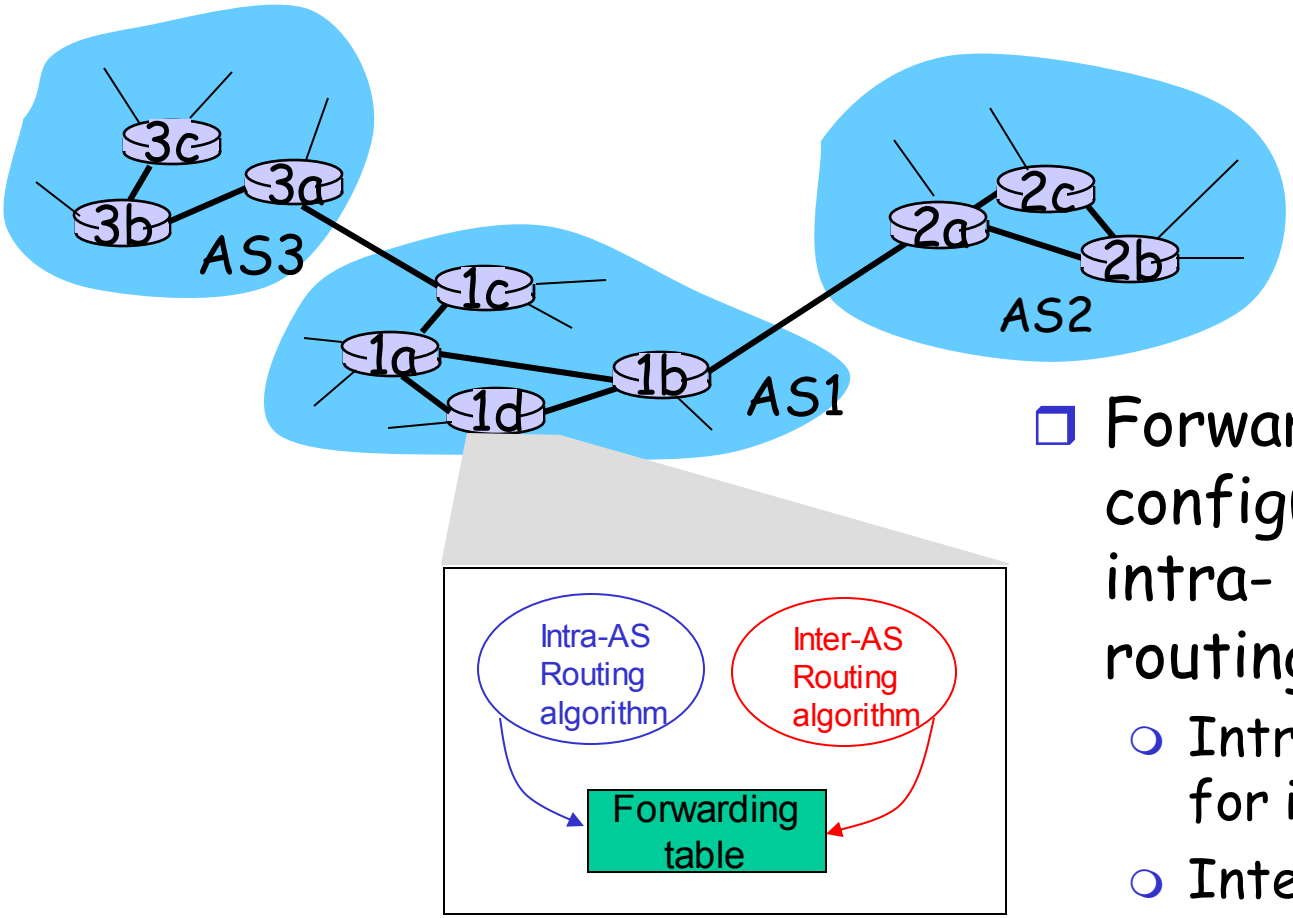

- Forwarding table is configured by both intra- and inter-AS routing algorithm
  - Intra-AS sets entries for internal dests
  - Inter-AS & Intra-As sets entries for external dests

Inter-AS tasks

- Suppose router in AS1 receives datagram for which dest is outside of AS1
  - Router should forward packet towards one of the gateway routers, but which one?

AS1 needs:

1. to learn which dests are reachable through AS2 and which through AS3
2. to propagate this reachability info to all routers in AS1

Job of inter-AS routing!

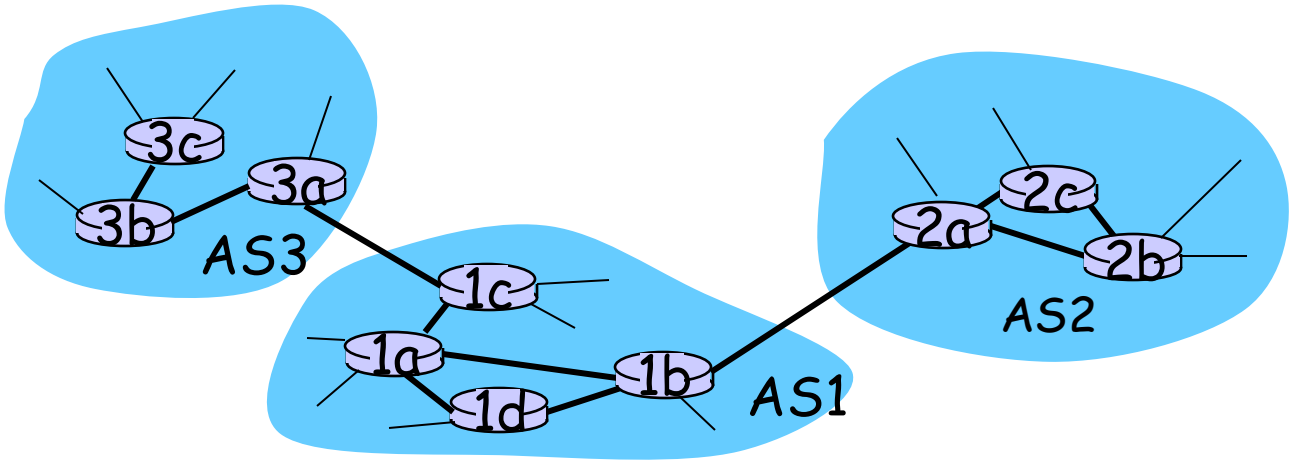

Set forwarding table in router 1d

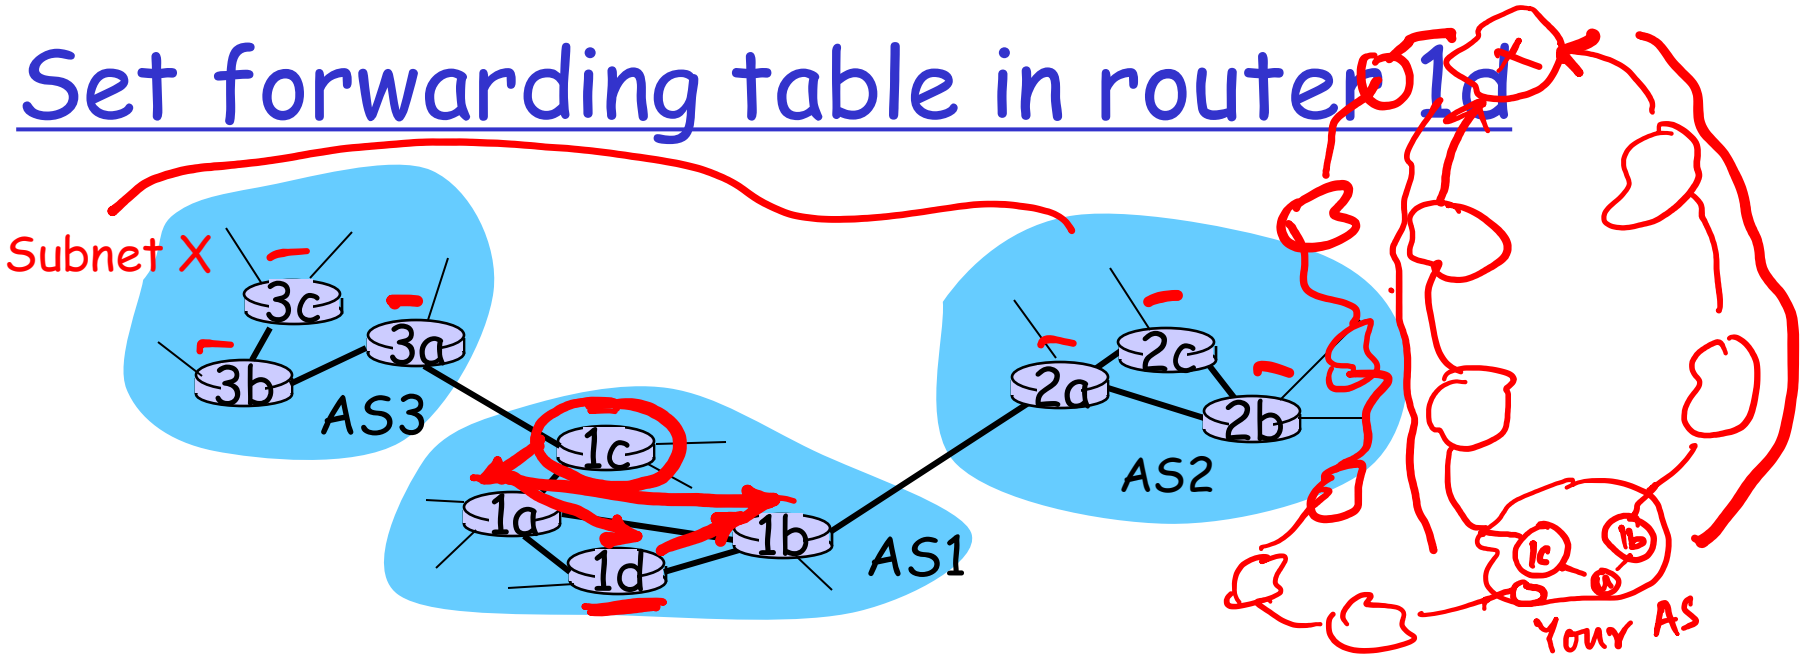

- Suppose AS1 learns from the inter-AS protocol that subnet *x* is reachable from AS3 (gateway 1c) but not from AS2.
- Inter-AS protocol propagates reachability info to all internal routers.
- Router 1d determines from intra-AS routing info that its interface *I* is on the least cost path to 1c.
- Puts in forwarding table entry *(x,I)*.

Example: Choosing among multiple ASes

- Now suppose AS1 learns from the inter-AS protocol that subnet *x* is reachable from AS3 *and* from AS2.
- To configure forwarding table, router 1d must determine towards which gateway it should forward packets for dest *x*.
- This is also the job on inter-AS routing protocol!
- Hot potato routing: send packet towards closest of two routers.

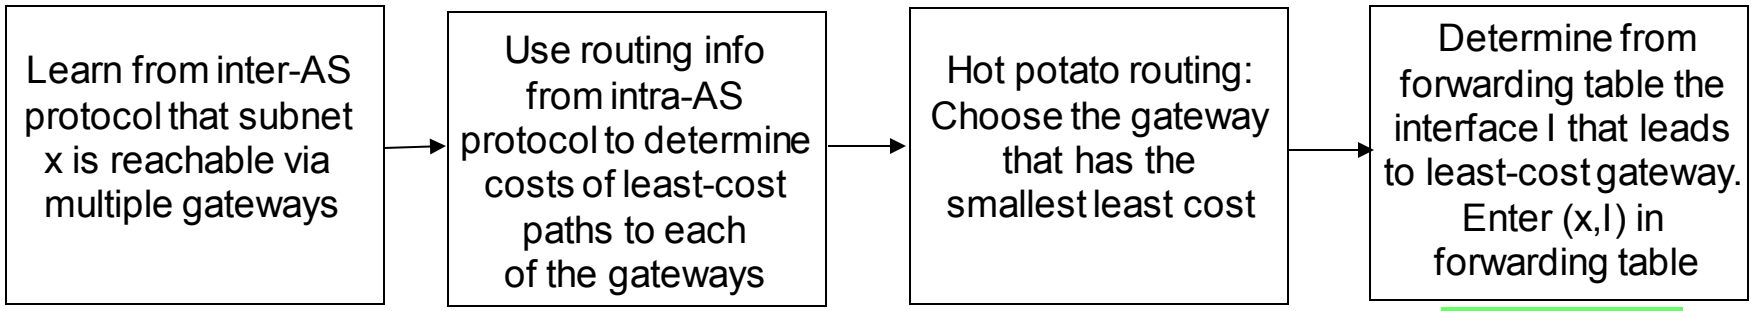

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing

Intra-AS Routing

- Also known as Interior Gateway Protocols (IGP)
- Most common Intra-AS routing protocols:
  - RIP: Routing Information Protocol
  - OSPF: Open Shortest Path First
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing