Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing

IP Addressing: introduction

- NIC : Net. interface card

- IP address: 32-bit identifier for host, router *interface*
- *interface:* connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one interface
  - IP addresses associated with each interface

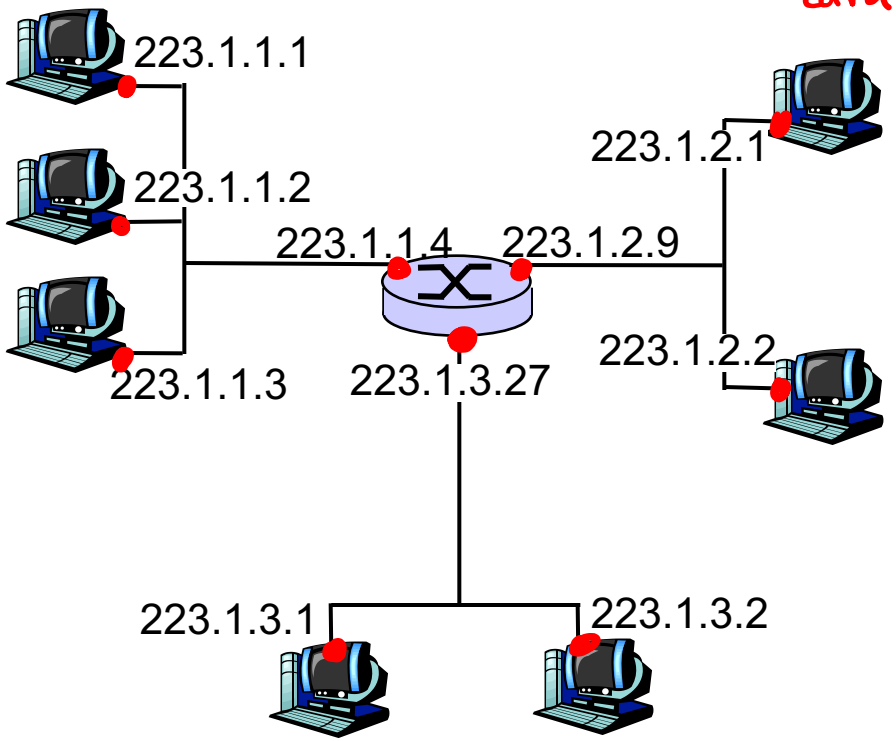

223.1.1.1 = 11011111 00000001 00000001 00000001

223 1 1 1

Subnets

- IP address:
  - subnet part (high order bits)
  - host part (low order bits)
- *What's a subnet ?*
  - device interfaces with same subnet part of IP address
  - can physically reach each other without intervening router

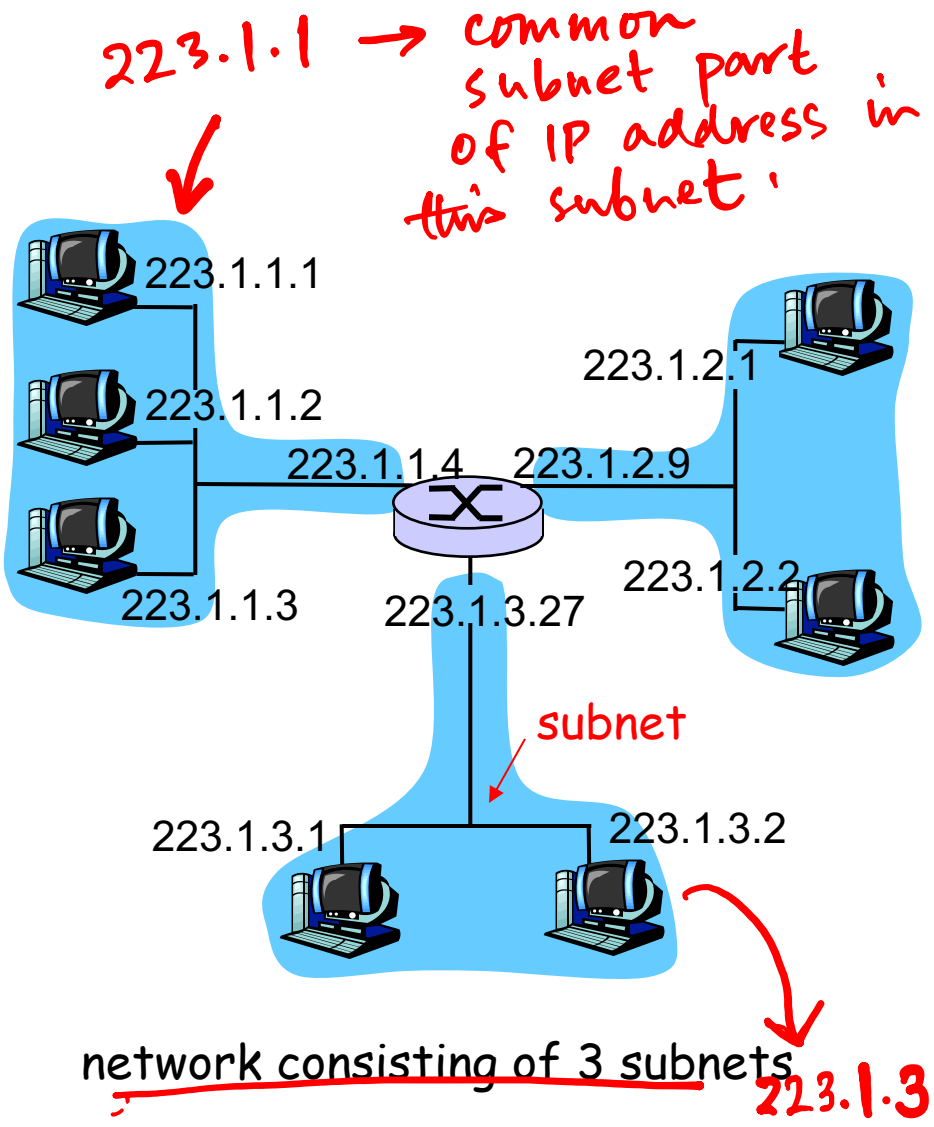

Subnets

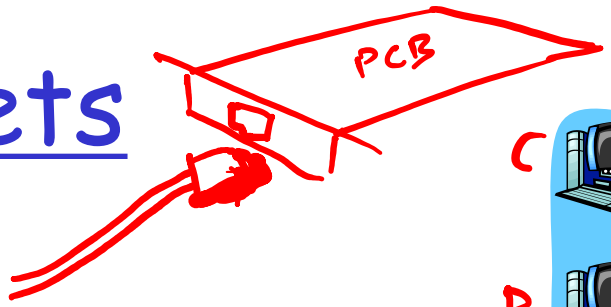

Recipe

- To determine the subnets, detach each interface from its host or router, creating islands of isolated networks. Each isolated network is called a ~~subnet~~.

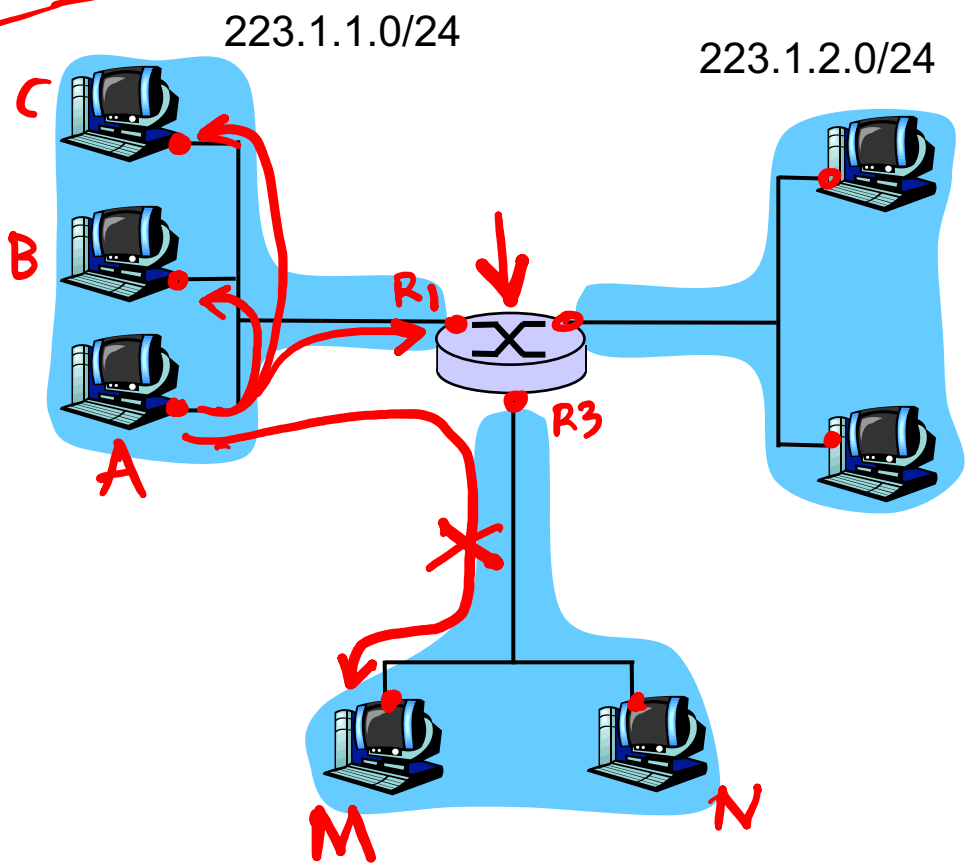

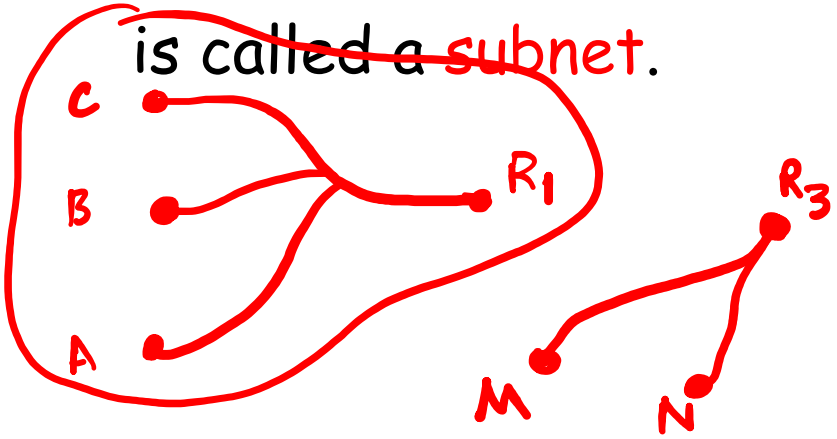

Subnets

How many? ~~3~~, 6 ✓

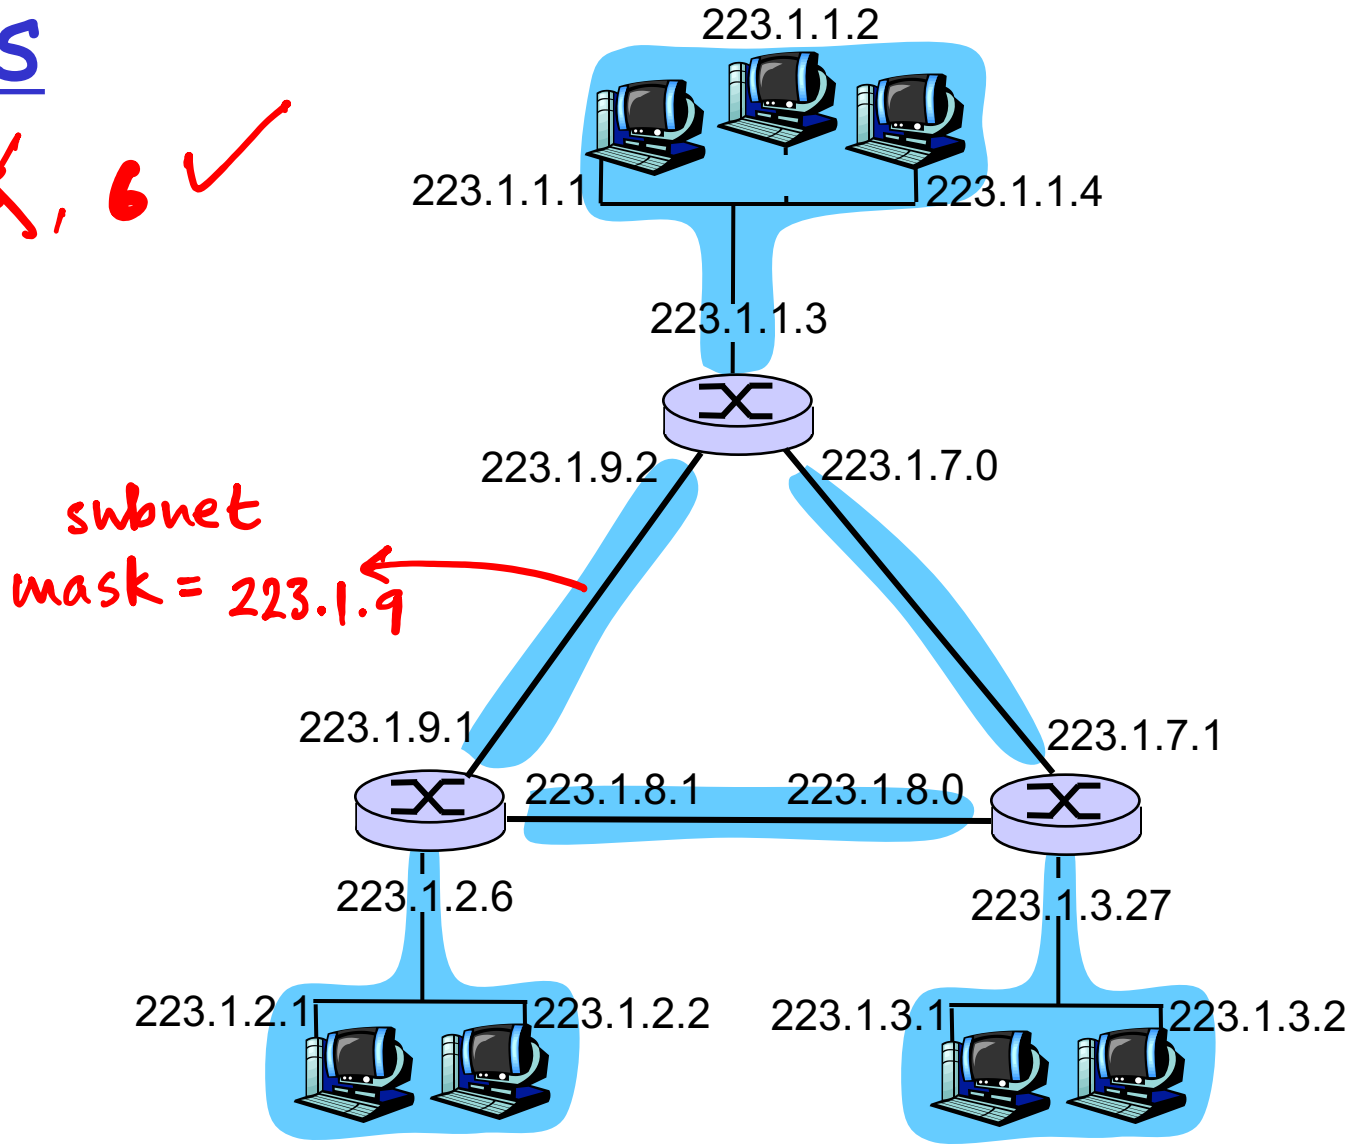

Class-based IP addressing

IP addressing: CIDR

Class C

223.16.10.0

Class B

Class A

CIDR: Classless InterDomain Routing

- subnet portion of address of arbitrary length
- address format: a.b.c.d/x, where x is # bits in subnet portion of address

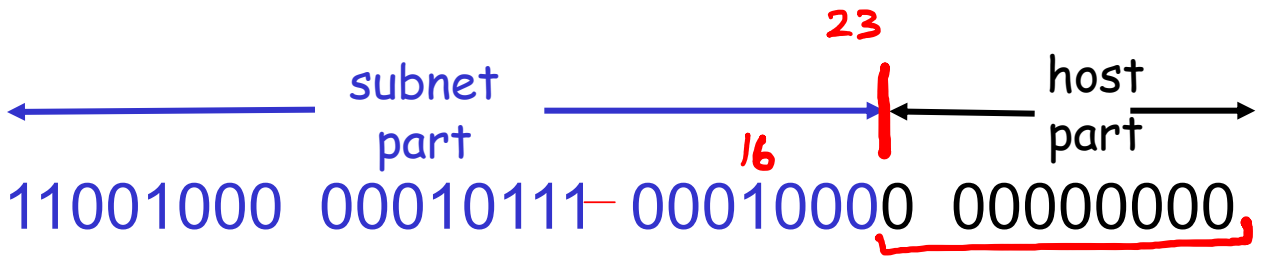

200.23.16.0/23 → supports 2^9 NICs.

IP addresses: how to get one?

Q: How does *host* get IP address?

- hard-coded by system admin in a file
  - Wintel: control-panel->network->configuration->tcp/ip->properties
  - UNIX: /etc/rc.config
- DHCP: Dynamic Host Configuration Protocol: dynamically get address from server
  - "plug-and-play"

  (more in next chapter)

IP addresses: how to get one?

Q: How does *network* get subnet part of IP addr?

A: gets allocated portion of its provider ISP's address space

ISP's block	11001000 00010111 00010000	00000000	200.23.16.0/20
Organization 0	11001000 00010111 00010000	00000000	200.23.16.0/23
Organization 1	11001000 00010111 00010010	00000000	200.23.18.0/23
Organization 2	11001000 00010111 00010100	00000000	200.23.20.0/23
...	.....	....	....
Organization 7	11001000 00010111 00011110	00000000	200.23.30.0/23

Question

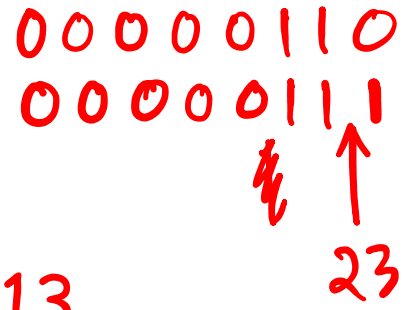

- Alice's IP Add: 121.36.6.13
- Bob's IP Add: 121.36.7.18

16

True or False?

Alice and Bob are in different subnets.

Depends on subnet mask.

Hierarchical addressing: route aggregation

Hierarchical addressing allows efficient advertisement of routing information:

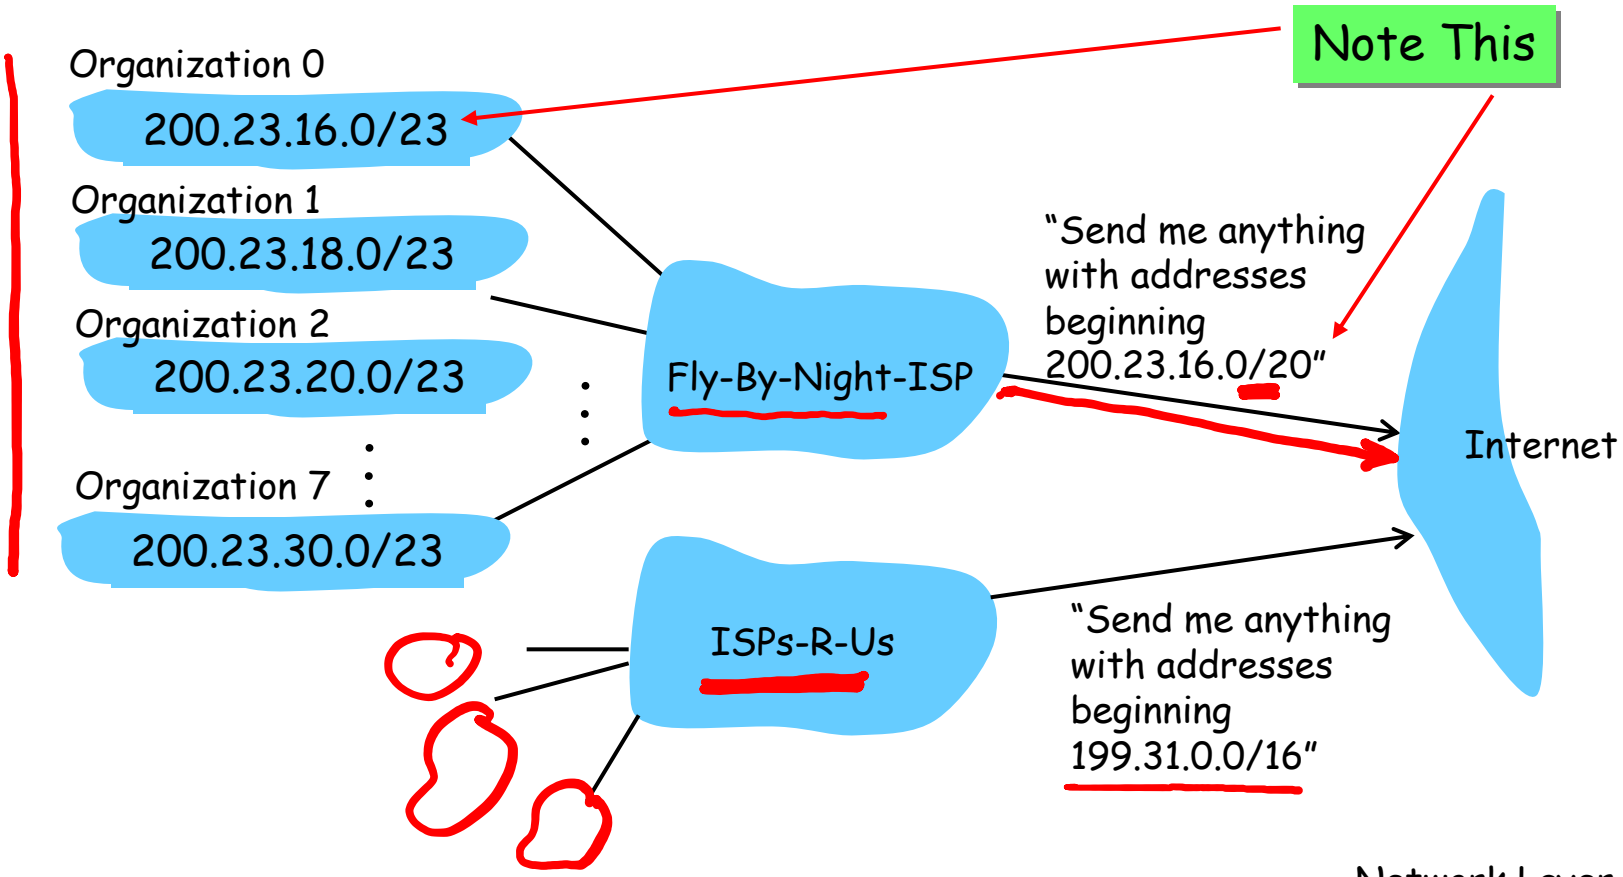

Hierarchical addressing: more specific routes

ISPs-R-Us has a more specific route to Organization 1

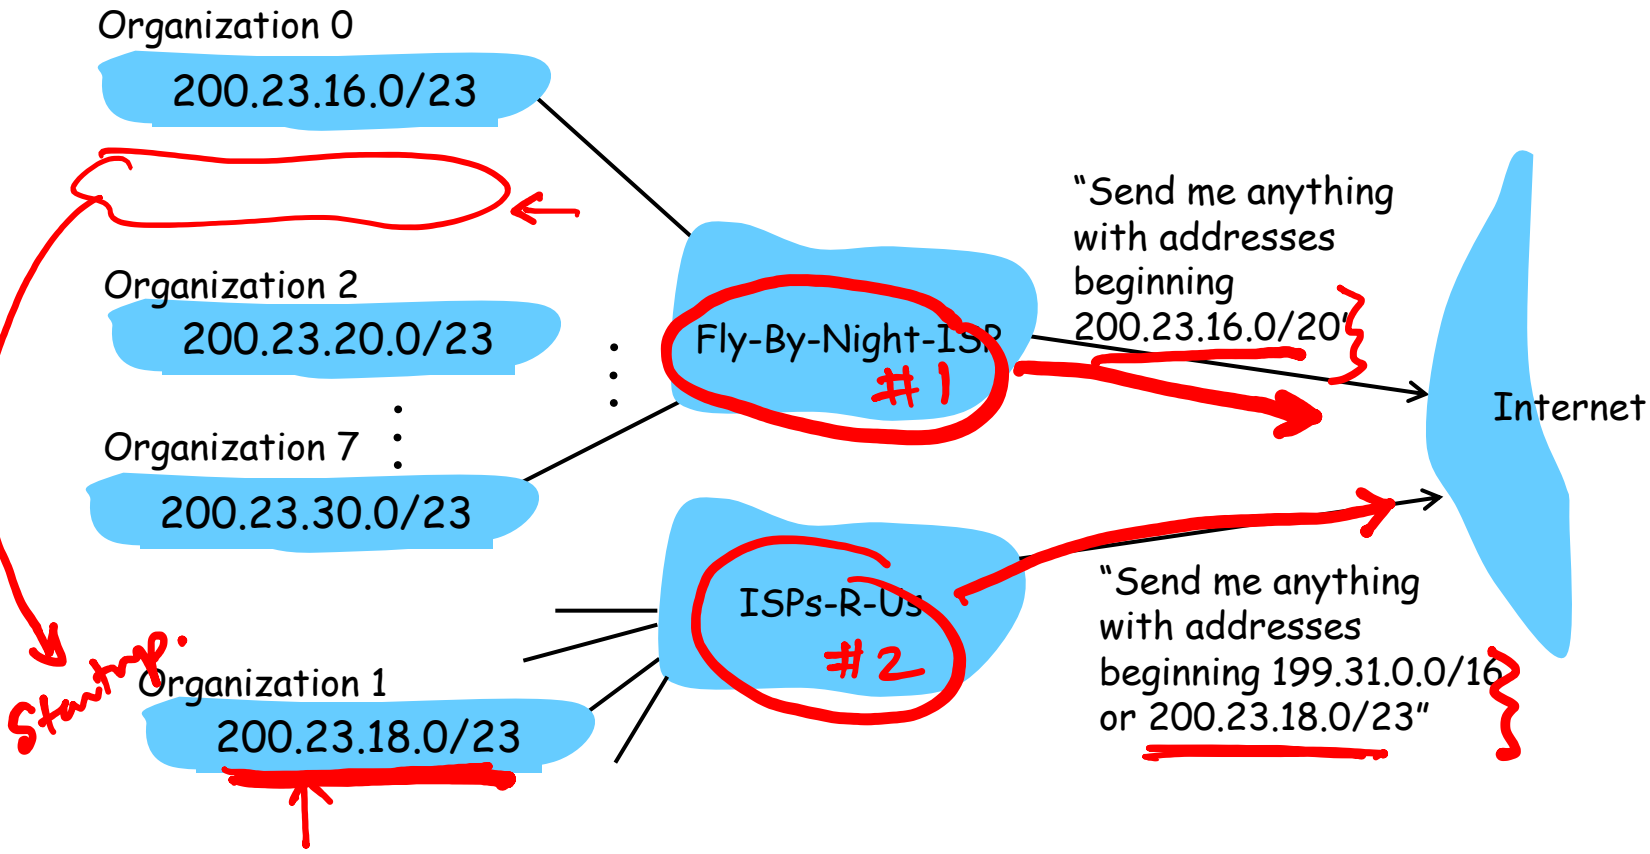

IP addressing: the last word...

Q: How does an ISP get block of addresses?

A: ICANN: Internet Corporation for Assigned Names and Numbers

- allocates addresses
- manages DNS
- assigns domain names, resolves disputes

NAT: Network Address Translation

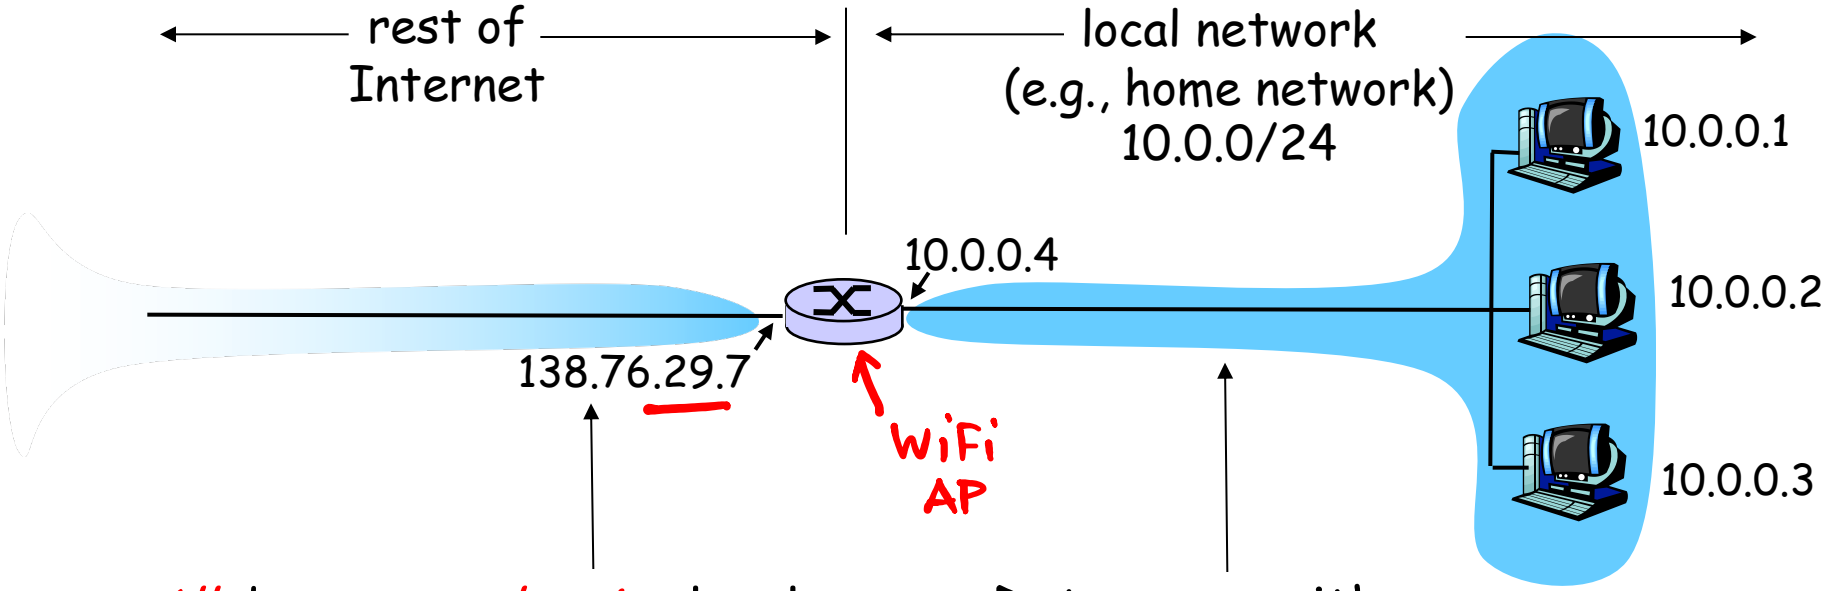

All datagrams *leaving* local network have same single source NAT IP address: 138.76.29.7, different source port numbers

Datagrams with source or destination in this network have 10.0.0/24 address for source, destination (as usual)

NAT: Network Address Translation

- Motivation: local network uses just one IP address as far as outside world is concerned:
  - range of addresses not needed from ISP: just one IP address for all devices
  - can change addresses of devices in local network without notifying outside world
  - can change ISP without changing addresses of devices in local network
  - devices inside local net NOT explicitly addressable, visible by outside world (a security plus).

NAT: Network Address Translation

Implementation: NAT router must:

- *outgoing datagrams: replace* (source IP address, port #) of every outgoing datagram to (NAT IP address, new port #)
  - . . . remote clients/servers will respond using (NAT IP address, new port #) as destination addr.

- *remember (in NAT translation table)* every (source IP address, port #) to (NAT IP address, new port #) translation pair

- *incoming datagrams: replace* (NAT IP address, new port #) in dest fields of every incoming datagram with corresponding (source IP address, port #) stored in NAT table

NAT: Network Address Translation

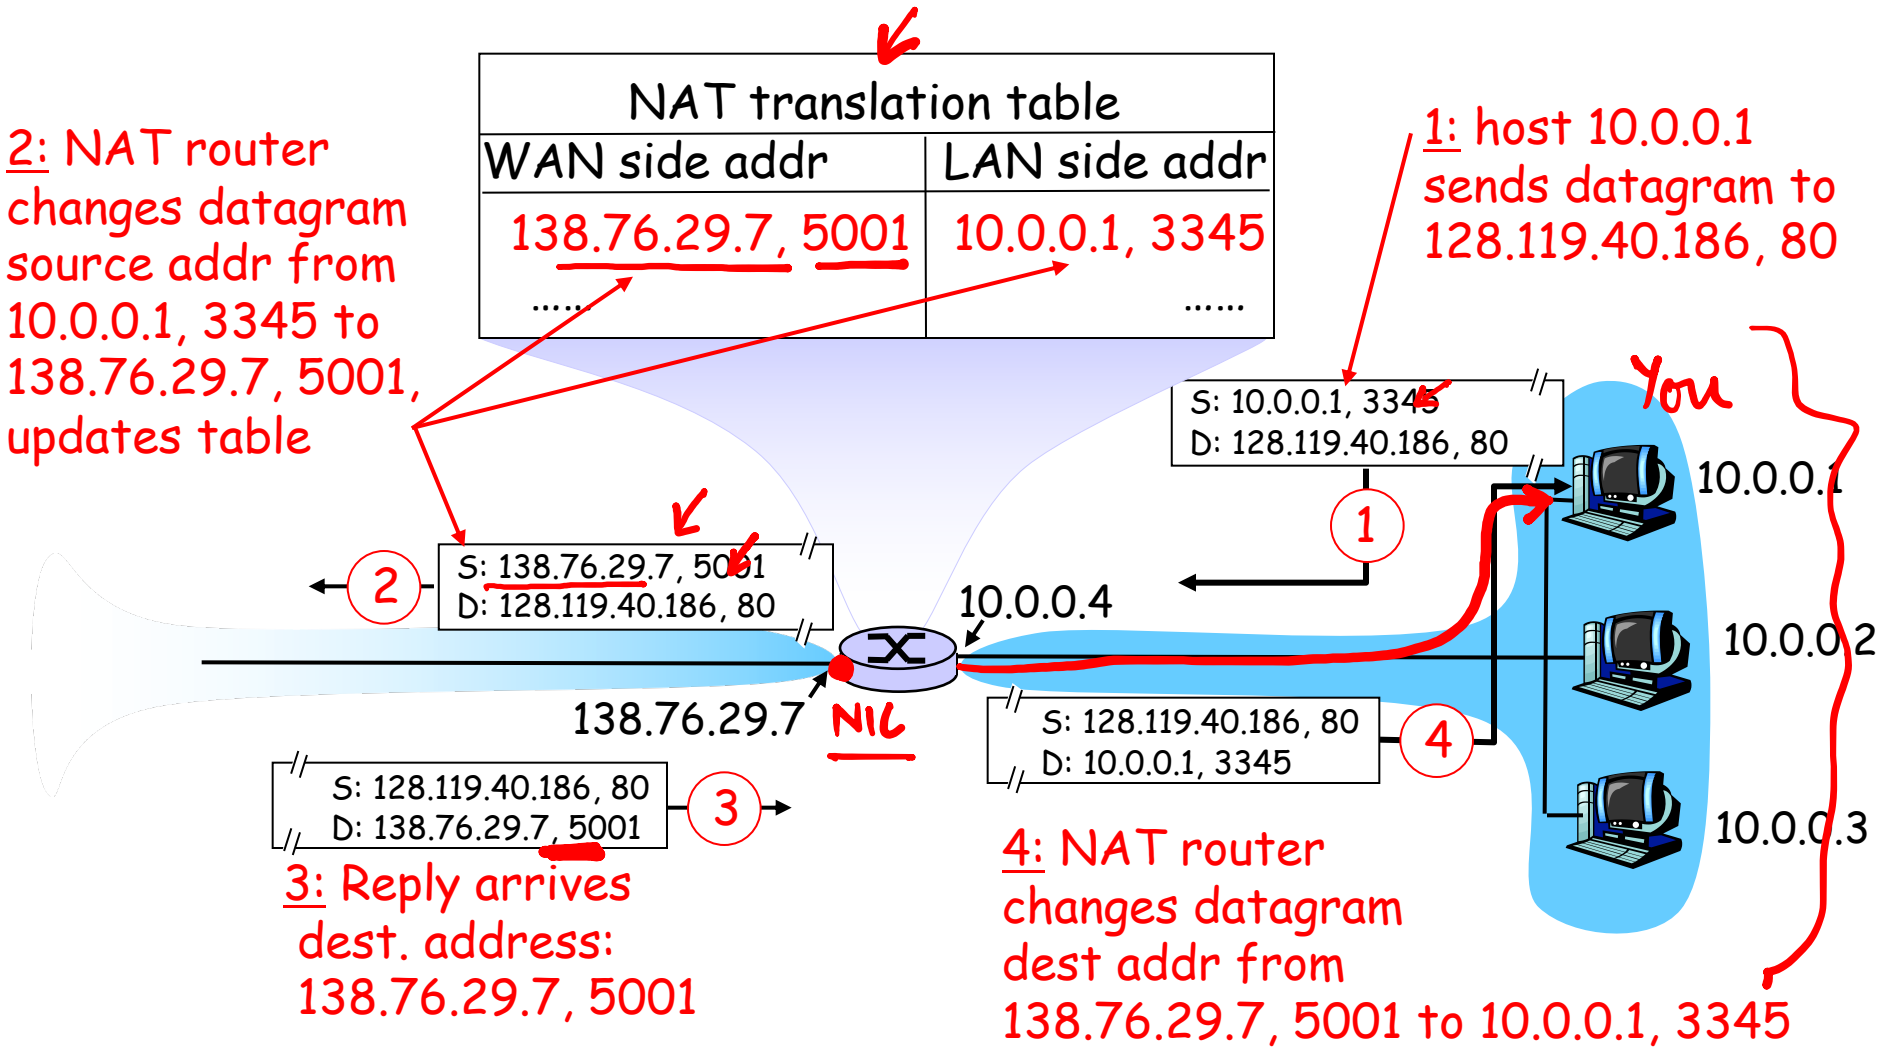

NAT: Network Address Translation



- 16-bit port-number field:
  - 60,000 simultaneous connections with a single LAN-side address!
- NAT is controversial:
  - routers should only process up to layer 3
  - violates end-to-end argument
    - NAT possibility must be taken into account by app designers, eg, P2P applications
  - address shortage should instead be solved by IPv6

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing

ICMP: Internet Control Message Protocol

- used by hosts & routers to communicate network-level information
  - error reporting: unreachable host, network, port, protocol
  - echo request/reply (used by ping)
- network-layer "above" IP:
  - ICMP msgs carried in IP datagrams
- ICMP message: type, code plus first 8 bytes of IP datagram causing error

Type	Code	description
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

Traceroute and ICMP

- Source sends series of UDP segments to dest
  - First has TTL =1
  - Second has TTL=2, etc.
- When nth datagram arrives to nth router:
  - Router discards datagram
  - And sends to source an ICMP message (type 11, code 0)
  - Message includes name of router& IP address
- When ICMP message arrives, source calculates RTT
- Traceroute does this 3 times

Stopping criterion

- UDP segment eventually arrives at destination host
- Destination returns ICMP "host unreachable" packet (type 3, code 3)
- When source gets this ICMP, stops.

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing

IPv6

- Initial motivation: 32-bit address space soon to be completely allocated.
- Additional motivation:
  - header format helps speed processing/forwarding
  - header changes to facilitate QoS

  IPv6 datagram format:
  - fixed-length 40 byte header
  - no fragmentation allowed

IPv6 Header (Cont)

Priority: identify priority among datagrams in flow
Flow Label: identify datagrams in same "flow."
(concept of"flow" not well defined).
Next header: identify upper layer protocol for data

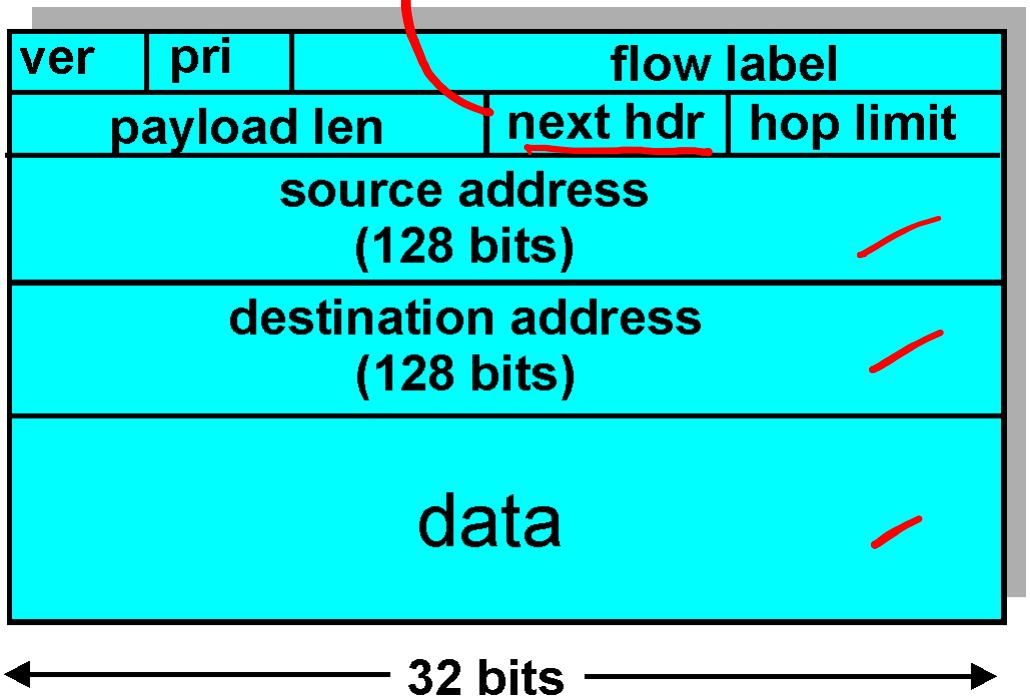

Other Changes from IPv4

- *Checksum:* removed entirely to reduce processing time at each hop
- *Options:* allowed, but outside of header, indicated by "Next Header" field
- *ICMPv6:* new version of ICMP
  - additional message types, e.g. "Packet Too Big"
  - multicast group management functions

Transition From IPv4 To IPv6

- Not all routers can be upgraded simultaneous
  - no "flag days"
  - How will the network operate with mixed IPv4 and IPv6 routers?
- *Tunneling:* IPv6 carried as payload in IPv4 datagram among IPv4 routers

Tunneling

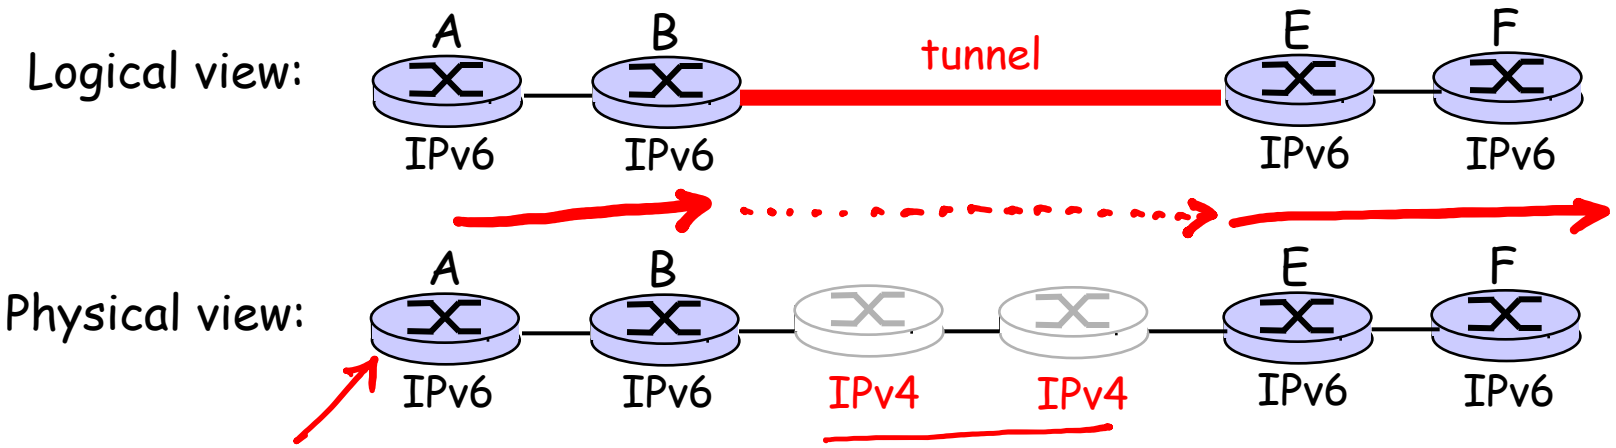
Logical view:
A
B
tunnel
E
F
IPv6
IPv6
IPv6
IPv6
Physical view:
A
B
E
F
IPv6
IPv6
IPv4
IPv4
IPv6
IPv6

Tunneling

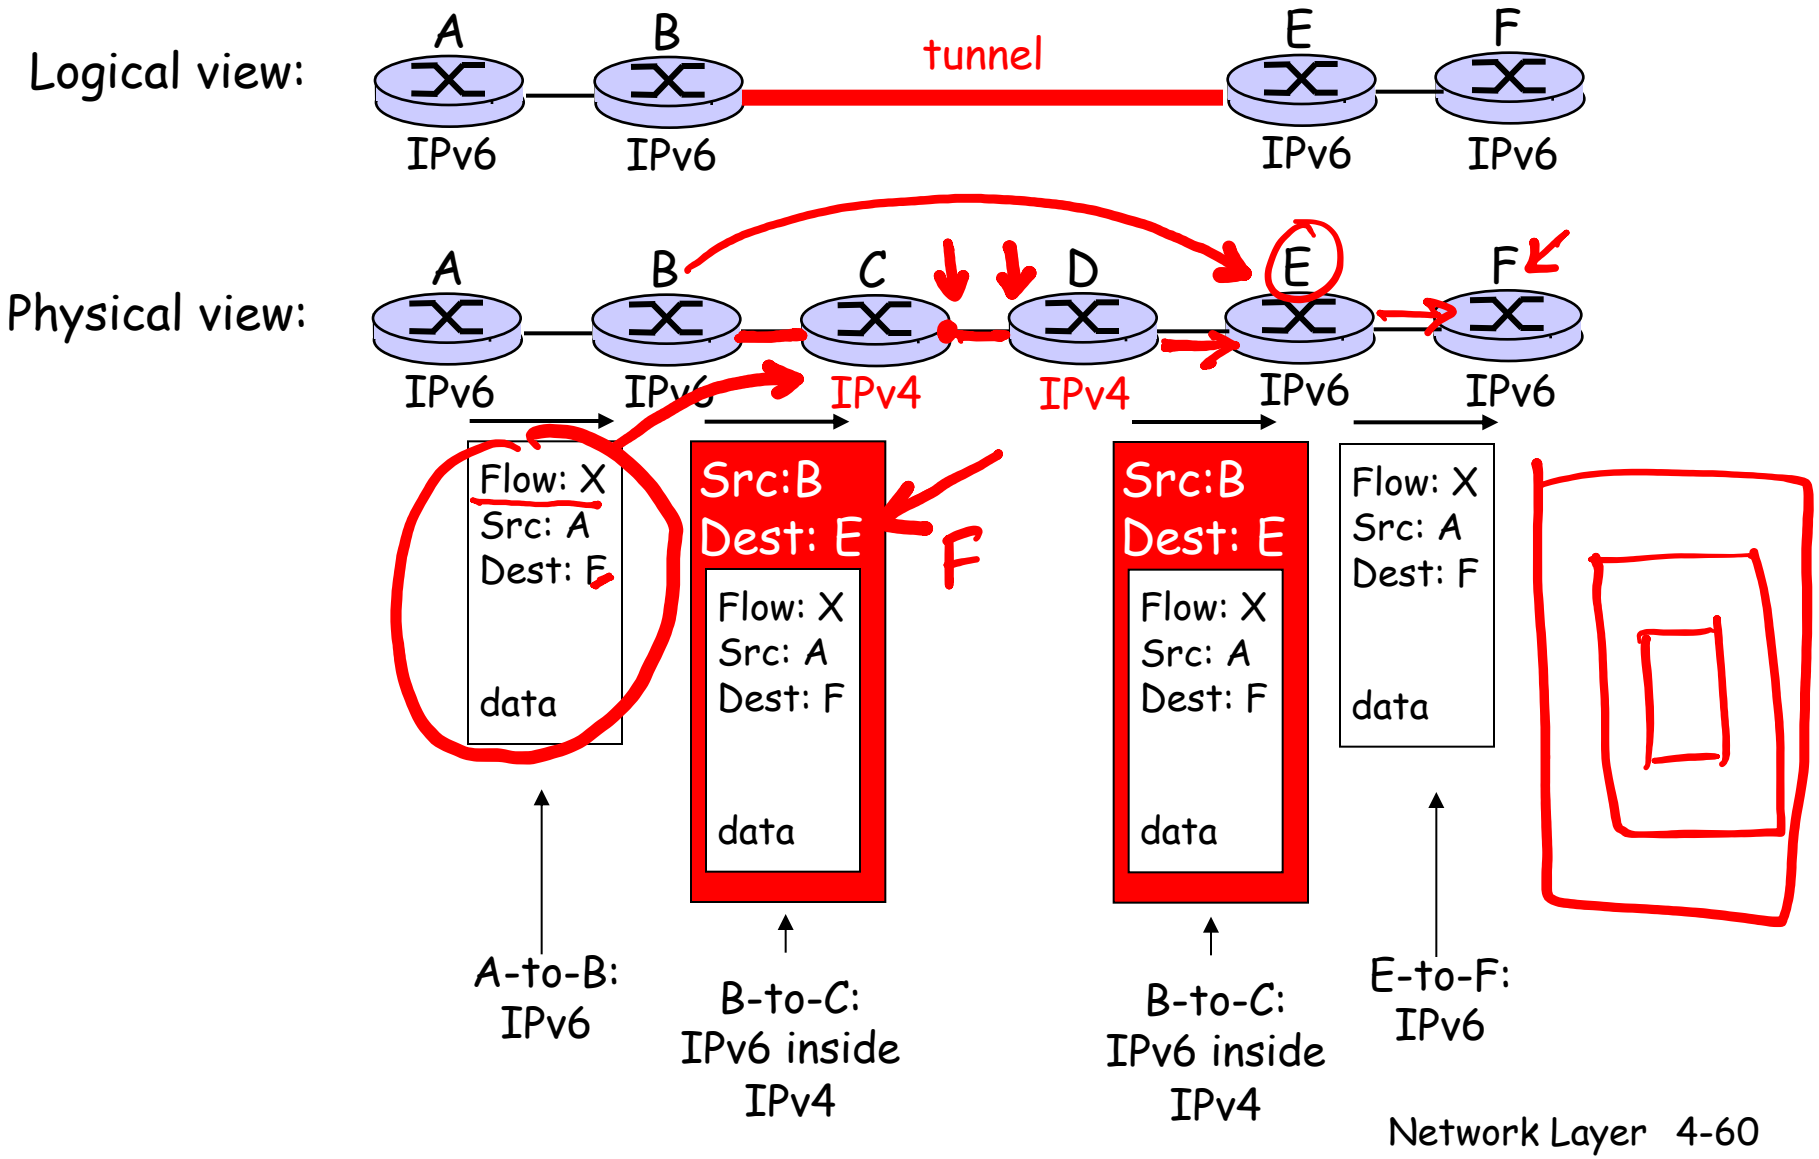
Logical view:
A
B
tunnel
E
F
IPv6
IPv6
IPv6
IPv6
Physical view:
A
B
C
D
E
F
IPv6
IPv6
IPv4
IPv4
IPv6
IPv6
Flow: X
Src: A
Dest: F
data
Src:B
Dest: E
Flow: X
Src: A
Dest: F
data
Src:B
Dest: E
Flow: X
Src: A
Dest: F
data
Flow: X
Src: A
Dest: F
data
A-to-B:
IPv6
B-to-C:
IPv6 inside
IPv4
B-to-C:
IPv6 inside
IPv4
E-to-F:
IPv6

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing