

The Feasibility of Small-Scale Wind Power Generation at Kent School, Connecticut: An economic, environmental, and aesthetic analyses

Jiajun Mao, Chun Lam Cheng

1 Macedonia Rd., Kent, CT

Abstract

Carbon-based energy source in electricity generation has already been challenged, in multiple pieces of research, not only for their scarcity(Höök & Tang (2013)) but also their negative impacts on the Earth's environment. In the face of severe environmental challenges such as global warming and its resulting problems such as extreme weathers (Höök & Tang (2013)) and dramatically increasing species, such as amphibian's, extinction rate(Alan Pounds et al. (2006)), a clean and environmentally-friendly energy source is in need. It is evident through multiple pieces of research that wind power has the potential of subsidizing, if not replacing, the role of power generation by those traditional energy sources. In light of the development of wind power worldwide, it is crucial for Kent School also to consider using wind power to fulfill parts of the electricity consumption on campus and hopefully reduce campus' environmental footprint. This study specifically focuses on the feasibility of a small-scale wind farm on Kent School's campus through economic, environmental, and aesthetic perspectives.

Keywords: Wind, Kent School, Small-scale, Energy, Economic-feasibility

1. Introduction

Kent School receives its electricity from the CT state grid (the solar power generated is sold back to the power company), which means that according to the energy sources profile of the CT state grid, 52.4% of the electricity that Kent School uses comes from natural gas and 43.7% comes from nuclear.(Administration (2019)) Also, the data obtained from the 2019 Green Cup Challenge¹ shows that during a normal academic week, the average total power consumption of the entire Kent School (including Kent Center School) is 69,862KWh. Therefore, it can be estimated that the annual power consumption is 2654.8MWh (estimating 38 weeks per academic year when Kent students are on campus). Calculating from the average commercial electricity rates in the state of Connecticut, which is 14.65¢/kWh(Administration (2019)), the annual spending of Kent School on electricity consumption is roughly \$10,234,783. Therefore, the incentives for the installation of wind power generation facility on campus can be concluded into two following parts:

- ***environmental incentives.*** Reduction of school's overall environmental footprint in the hope of contributing to the alleviation of environmental problems caused by electricity consumption worldwide.
- ***economic incentives.*** Reduction of school's growing expenditure incurred by student's growing demand for electricity so that school can reach tuition/expenditure balance with each student.

1.1. *environmental incentives*

Though natural gas is a comparably cleaner energy source than traditional carbon-based sources such as coal or petroleum, the burning of natural gas nevertheless still releases carbon dioxide (Laboratory (2010)), one of the most notorious greenhouse gases that are causing the global warming (Shakun et al. (2012)). Therefore, for environmental concerns, the burning of carbon-based

¹Data obtained from J. Klingebel, Science Department Head, Kent School

energy source should be avoided as much as possible. Wind power, despite the carbon emission generated during the manufacturing processes of the turbines
30 (Kaldellis & Apostolou (2017)), release minimum, if not none, additional greenhouse gases once they become functional (Denny & O'Malley (2006)).

Several reviews have been done regarding the potential or achievement of wind power in reducing the overall carbon emission and other environmentally harmful gas for electricity generation, as well as Kent School's reliance
35 on fossil fuels. These studies, including Samal & Tripathy (2019)'s Cost savings and emission reduction capability of wind-integrated power systems and Denny & O'Malley (2006)'s Wind Generation, Power System Operation, and Emission Reduction demonstrate the possibility and potential of reduction in Kent School's carbon footprint if wind-power generating facilities are installed
40 on campus, which will in turn further Kent's path on making the school's operations more environmentally sustainable.

1.2. economic incentives

It is evident that to provide students with quality education, Kent School needs to possess a certain degree of financial affluence. However, according to
45 various sources, including the Headmaster of the school, Fr. Shell, there is a substantial gap existing between the tuition and cost for a student. Therefore, to make Kent education genuinely available to everyone, the operational cost gap for each student must be reduced. Using wind energy to subsidize the electricity consumption on campus might make the cost reduction possible.

Again, several studies, including Maria Isabel Blanco's The economics of wind energy (Blanco (2009)), and The Economics of Wind Energy: A report by the European Wind Energy Association (Awerbuch & Morthorst), prove that the average cost of the operation of a wind farm could be substantially lower compared to the cost of buying electricity from the regional power. Therefore,
55 through the utilization of wind power on campus, Kent School can possibly reduce the operation cost for a single student become more financially self-sufficient, in turn providing future Kent students a better education.

2. Methods

2.1. Location Determination Factors

60 When determining the location of the possible wind farm, the location must satisfy the requirements including but not limited to the listed below. When considering a location, requirement 1 and 2 are strict requirements, meaning that if these two requirements are not fulfilled, a location should not be considered even if they satisfy requirement 3 and 4. Requirement 3 and 4 in turn, are
65 loose requirements that do not necessarily have to be fulfilled if the economic and environmental benefit of constructing a wind farm outweigh the negative influence. However, if there is a statistically significant portion of student body voicing against the construction of the wind farm for a reason mentioned in requirement 3 and 4, these two requirements will be weighted more heavily into
70 consideration of the location of the wind farm.

1. *Powerful and consistent wind.* Whether that location has consistent and powerful wind to make the construction of a wind farm viable. The rough wind speed of that location is reported by students on campus and Jiajun and Chu Lam's personal experience around the campus.
- 75 2. *Feasible location.* Whether that location has enough space on the ground and in the air to support the construction of a wind farm. This factor is determined by the proximity to another physical object on the ground level or in the air, such as dormitories, academic/religious buildings, mountains, etc.
- 80 3. *Minimal influence on school operations.* Whether the construction and presence of a wind farm at that location will cause disturbance or negative influence on normal daily school operations. For example, the noise generated by the wind turbine is factored into considerations.
- 85 4. *Minimal influence on aesthetic beauty.* Whether the construction of a wind farm at that location will decrease the beauty of the lovely valley land of Kent. This factor is majorly based on Jiajun and Chu Lam's subjective definition of beauty.

2.2. Location Determination Process

In order to obtain a general location on campus where the wind is consistent
90 and powerful, a study will be done with students population on campus. By
assigning each of CL and Jiajun's 54 friends a number and by using a random
number generator, we were able to select 30 students to respond to the question
of "Where on campus do you think the wind is strongest? And another location
where the wind is the second strong?". From all the responses received, two
95 locations with the highest vote and consider them for the second requirement
of location feasibility. Taking the second requirement into consideration - loca-
tion feasibility, both sites' proximity to another physical object will be analyzed
and whether the two sites from the requirement above satisfy the criteria of
having a clear ground level and aerial zone for the construction of a possible
100 wind farm will be concluded. If any location does not satisfy the criteria for
this requirement, it will be eliminated from consideration. Then, from the re-
maining locations, their potential influence on the school's regular operation
will be analyzed, including but not limited to academic activities, athletic ac-
tivities, and recreational activities. The adverse effects of the wind farm will
105 be analyzed and considered such as the noise generated and the space required
on the ground level. At last, the remaining sites might cause an influence on
the aesthetic beauty of the Housatonic Valley. A study identical to the one
described in requirement one is conducted again with the question "Do you
think the construction of a wind farm at site A and/or B will have a negative
110 impact on the aesthetic beauty of the surrounding area and the Kent campus?"
From the answers received we will analyze the majority side and take that into
consideration.

2.3. Feasibility Determination Process

After the location is determined by the process described in section 2.2, they
115 will be analyzed for the feasibility of actually constructing a wind farm. Rele-
vant data, such as flow volume and wind speed will be collected. To collect such
data, HoldPeak's wind anemometer 856A will be used. The device will be set

up in the chosen location, and the fan that will be measuring the wind speed will be set up on top of a tripod 2m above ground level. After a continuous 24
120 hours of data collection, the data from the wind anemometer is then transferred to the computer, and a graph of wind speed/flow volume against time will be plotted.

From the plotted graph as well as the wind speed/flow volume's relationship with the amount of electricity generated the economic benefit from the
125 construction of such a wind farm, and its possible environmental benefits and consequences will be analyzed. At last we can compare the wind speed and flow volume, as well as the economic/environmental benefit of different locations across campus with each other and other locations in the United States where commercial wind farms are in operation to determine the final feasibility
130 of constructing a wind farm on Kent School's property at a chosen location.


3. Results

3.1. Location Determination Results

After sending out requests to 60 students on campus with the question *Where do you think the wind is strongest on campus?* and the options as following,

- 135 1. Club Field
2. Headmaster's Field
3. South Field
4. Boardwalk/Main


we received 17 response from those 60 questionnaires sent, a response rate of
140 28.3%. The result of the survey is demonstrated in *Figure 1* with Club Field, South Field, and Boardwalk each receiving 5 votes and Headmaster's Field Receiving 2.

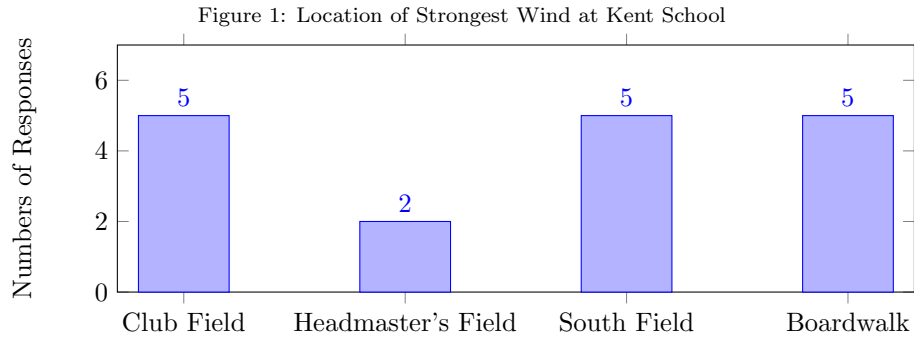

From the 60 surveys we sent out to random Kent students with the question *Will Installing Wind Turbines at Following Locations Disrupt the Beautiful Kent*
 145 *Scenery* and the following choices,

1. Club Field
2. South Field
3. Boardwalk/Main

we received 12 responses from those 60 questionnaires, a response rate of
 150 20%. The result of the survey is demonstrated in *Figure 2* with 58% of responses saying yes for Club Field, 8.3% of responses saying yes to South Field, and 33.4% of responses saying yes to Boardwalk.


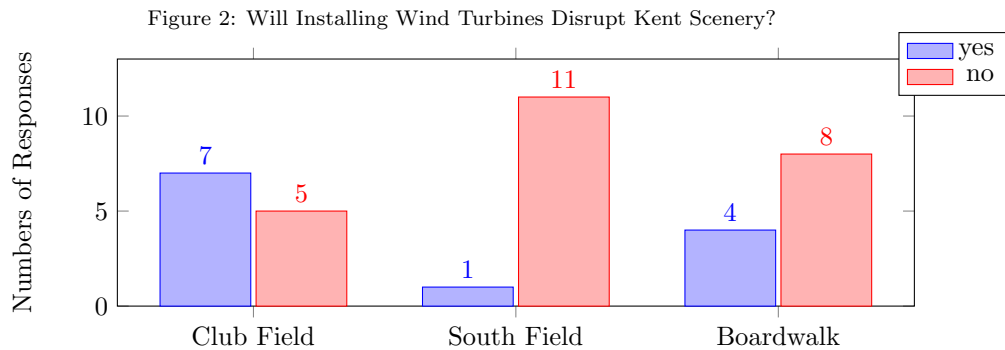


3.2. Location Wind Speed Result

155 For reasons mentioned 4.3.3 of the error analysis, only wind speed data from the anemometer on top of Dickinson Auditorium is preserved and recorded. We have managed to obtain the wind data for a single day (5/22/2019), an entire week (5/15-5/22/2019) and an entire month (4/22-5/22/2019). For each specific time period we plotted the detail wind speed data averaged for a relatively
160 small time frame to accurately reflect the wind speed during that period of time while preserving the visibility in the graphed plots. Then for each time frame, we plotted an extra graph using a moving average of a longer period of time, which shows the general trend of the wind speed.

It can be seen from *Figure 4*(single day) that for a single day during spring-
165 time, highest wind speed occurs during the midday with wind speed reaching as high as 2m/s while the wind speed during morning and evening are only around 0.5m/s. It can also be seen from *Figure 6*(entire week) that the general trend of wind speed during a week corresponds to the daily trend without a clear weekly trend. At last, we can see from *Figure 8* that wind speed is generally higher at
170 the end of a month.

Graphs are on next page for better formatting

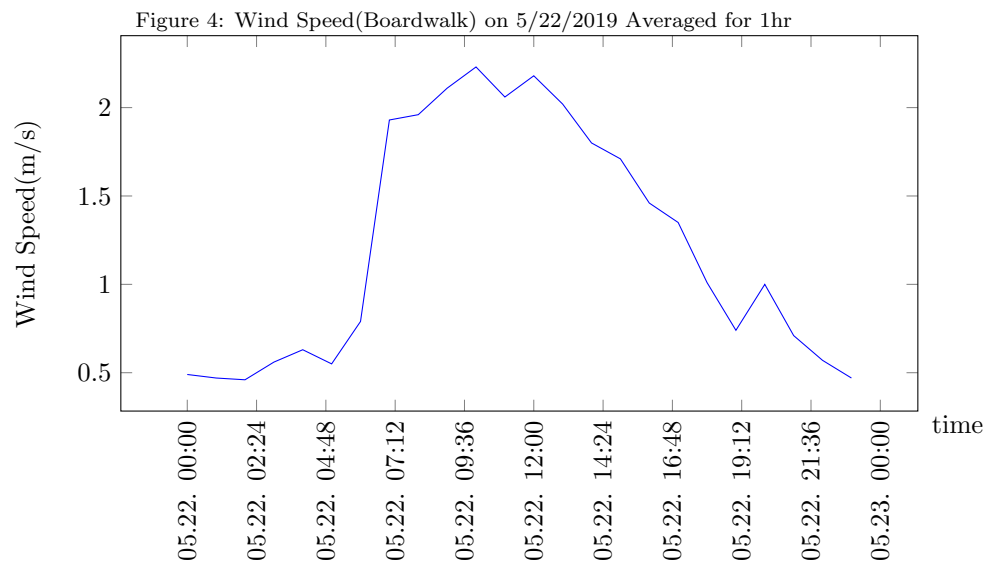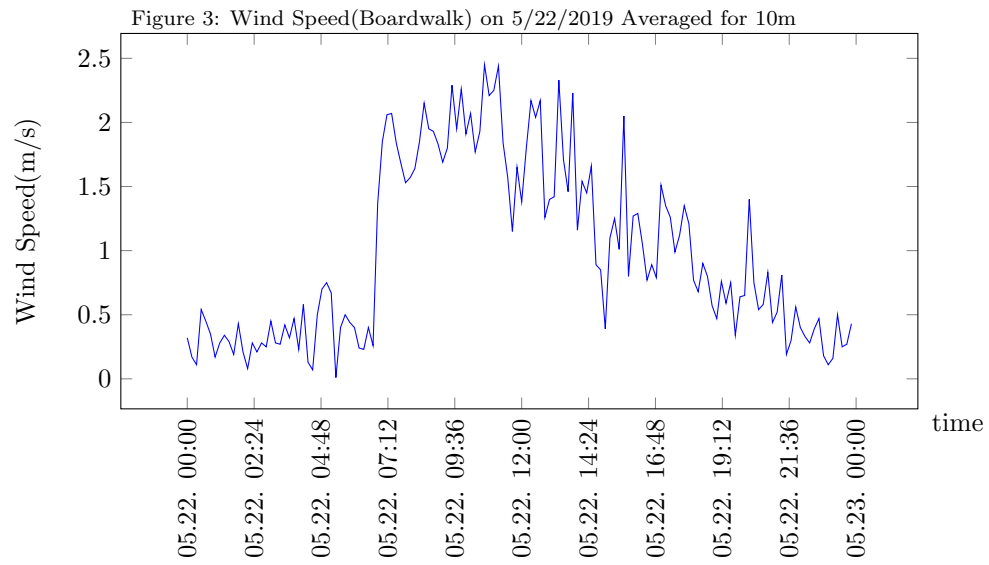

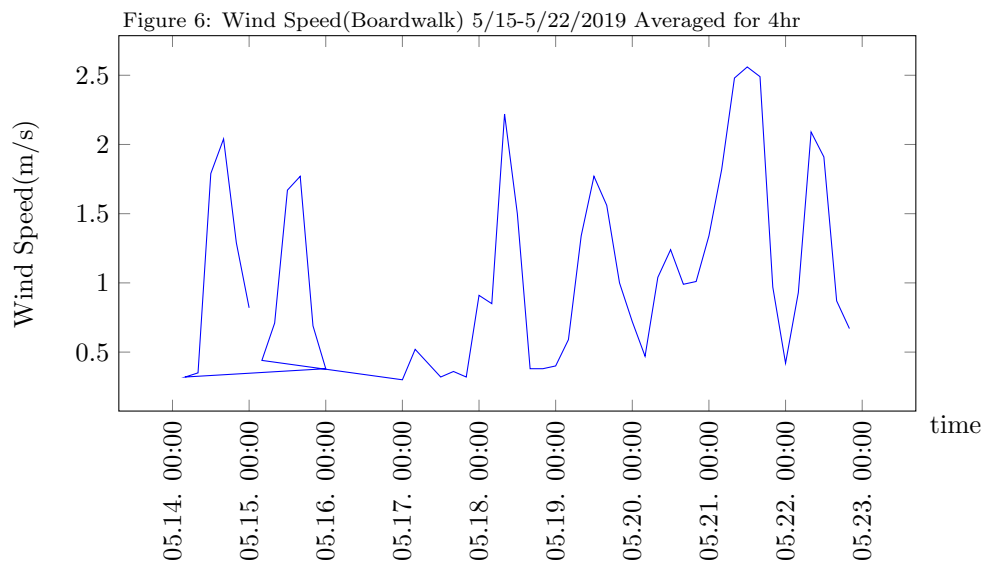
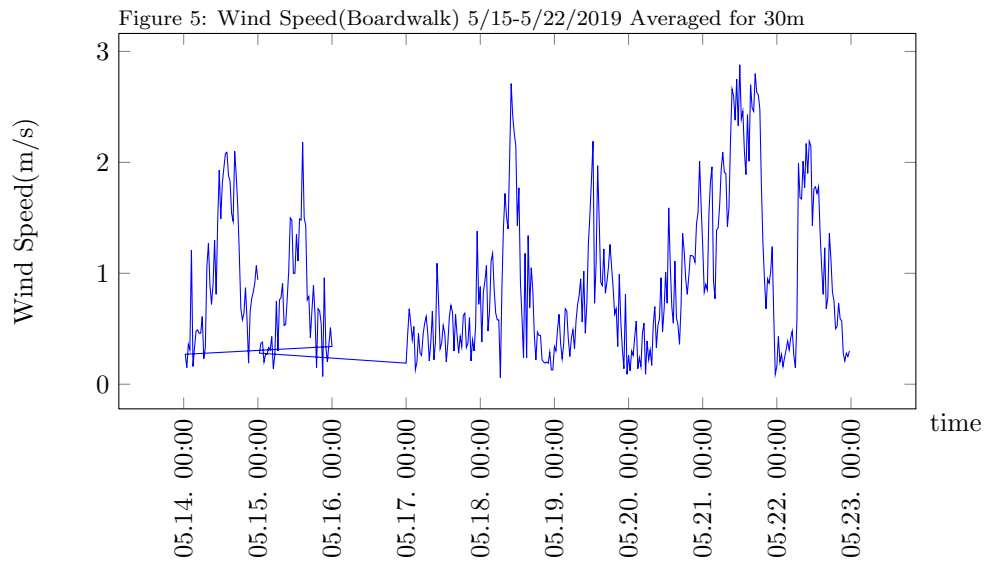


Figure 7: Wind Speed(Boardwalk) 4/22-5/22/2019 Averaged for 2hr


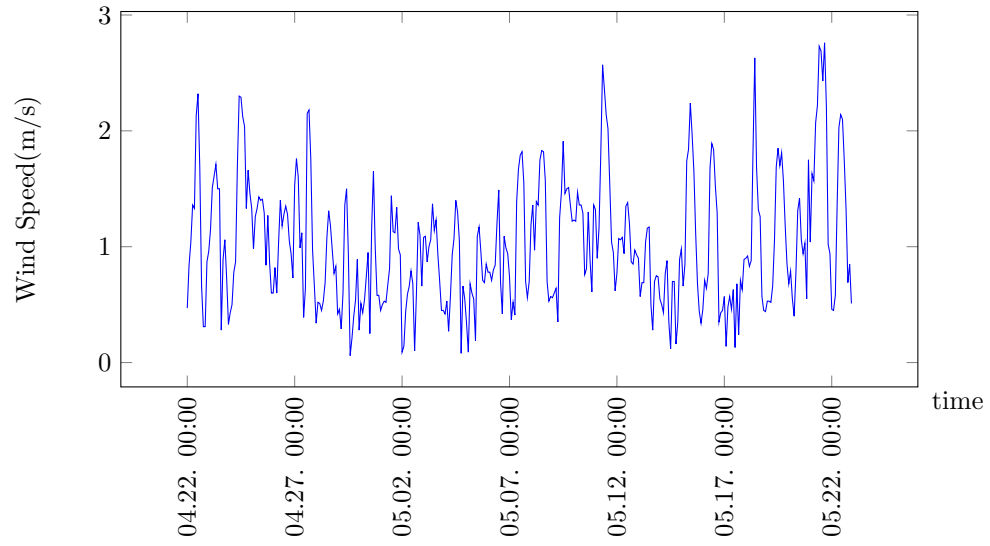


Figure 8: Wind Speed(Boardwalk) 4/22-5/22/2019 Averaged for 1 day

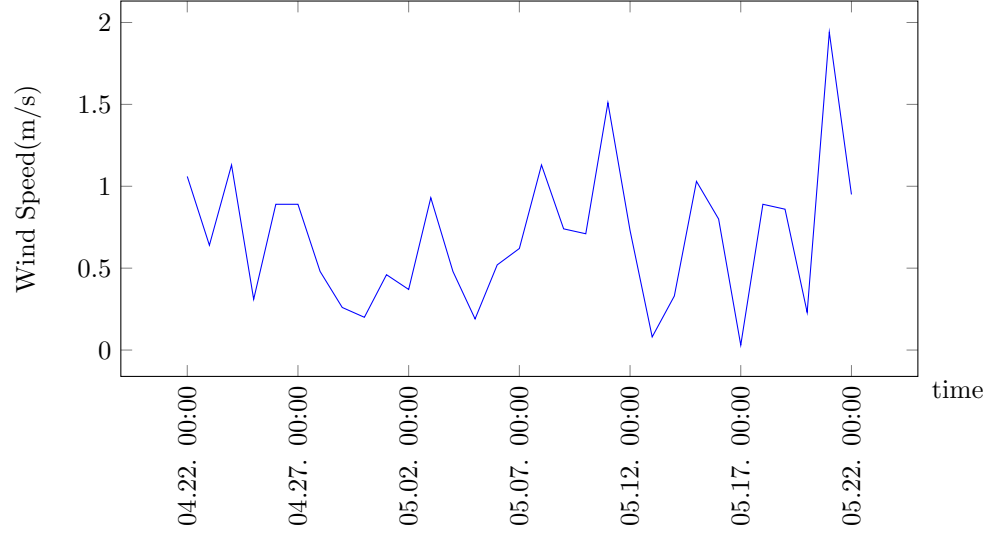

3.3. Location Power Output Result

Figure 9: Instantaneous Power Generation(Boardwalk) on 5/22/2019 Averaged for 10m

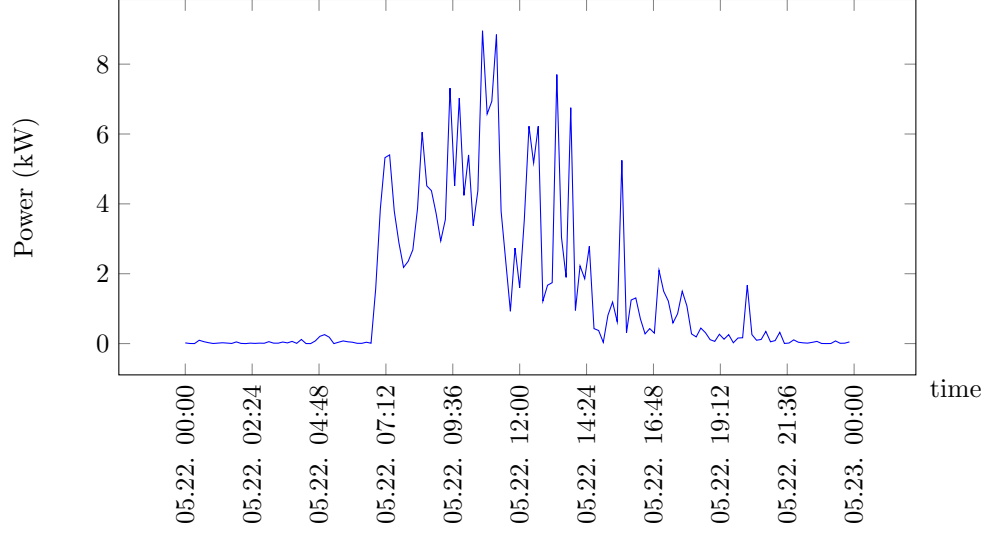


Figure 10: Instantaneous Power Generation((Boardwalk) 5/15-5/22/2019 Averaged for 30m


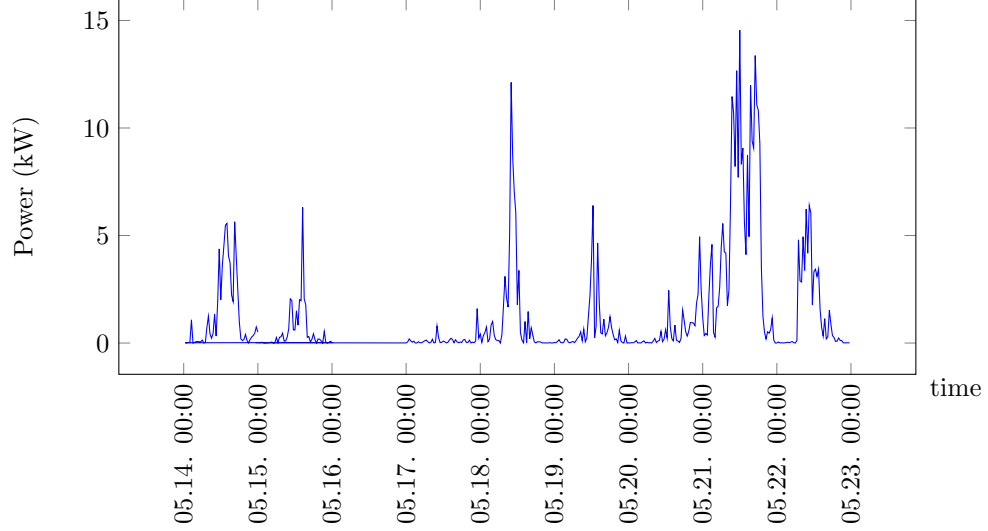


Figure 11: Instantaneous Power Generation((Boa brdwalk) 4/22-5/22/2019 Averaged for 2hr

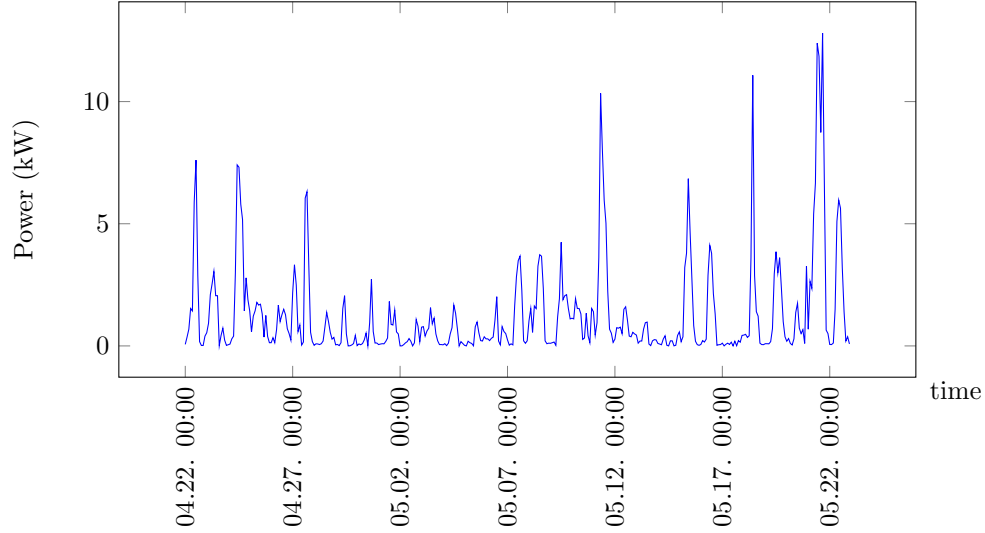

4. Analysis

4.1. Location Determination Analysis

175 Combining the result shown in *Figure 1* the processes described in *Section 2.2*, Club Field, South Field and Boardwalk all satisfies the Location Determination Factor 1 (powerful and consistent wind) from the survey result and thus qualify for being considered for the Location Determination Factor 2 (feasible location).

180 Both South Field and Club Field do not have any buildings or natural landscape such as Mount Algos in proximity. Therefore they have a clear ground level that would be suitable for the construction of wind farm. We can also see that both South Field and Club Field satisfy the entirety of the Location Determination Factor 2 by not only having a clear ground level but a clear air space
185 above. On the other hand, boardwalk/main is in close proximity to Dickinson Auditorium, Foley Hall and North Dorm, which makes it an impossible location to construct a wind farm due to unclear ground level, thus removed from consideration. As a result, only South Field and Club Field qualify for being

considered for Location Determination Factor 3 (minimal influence on school
190 operations).

South Field and Club Field are fields actively used for the majority of outdoor athletic training and events during the fall and spring terms of Kent School. Hence, having a wind farm at those two locations might have impacts on school operations during the construction phase, operation phase, and decommission
195 phase. During the construction phase, areas on both of the fields will be appropriated for the construction of roads for transportation of building materials and passage of construction vehicles, as well as temporary placement of building materials. Therefore, no athletic events and training can be carried out during the construction phase. After the construction ended and the wind turbines are
200 in operation, both fields still need to go through recovery period for all the grass that is necessary for athletic events and training to grow back. Therefore, we can predict that athletic programs of Kent School are going to be severely disrupted if the construction happens during an academic school year. A solution does exist for the school to construct the wind farm during the summer session,
205 which gives Kent School 3 months to finish construction. However, if the construction does not finish in that time frame, disturbances to school operations described above are still going to happen.

Because 91.7% of the people responded think that constructing a wind farm at South Field would not disrupt the landscape of Kent School, South Field
210 satisfies Location Determination Factor 4 and qualify to become one of the potential sites for the construction of the wind farm. Surprisingly, though being an open field similar to South Field, 58% of people responded think that constructing a wind farm at Club Field would disrupt the beautiful landscape of Kent School. This might be caused by Club Field's close proximity to the
215 main campus so that students will be able to have the wind farm in visual at a higher frequency whereas students rarely visit South Field other than athletic training and events and South Field is relatively far away from the main campus. However, since 58% is not statistically significantly higher than 50%, we cannot arrive at the conclusion that majority of the Kent Students will think

220 that constructing a wind farm at Club Field will have negative impacts on the Kent landscape. As a result, Club Field will also be considered as a qualifying location for building a wind farm.

To our surprise, only 33.4% of people responded think that having a wind farm at Boardwalk is going to have a negative impacts on Kent scenery considering the location of the Boardwalk - at the center of the main campus and in close proximity to areas of frequency academic activities and student life (dormitories, dining hall, chapel, etc.). Therefore, because of the reason mentioned in *Section 4.3.3* of error analysis, we kept Boardwalk/main for the feasibility analysis despite the fact that it does not satisfy Location Determination Factor 2, which is a strict requirement.

To conclude, Club Field, South Field, and Boardwalk/Main all will be considered as qualifying locations for the construction of a wind farm for Kent School and all three locations will be analyzed for their wind speed to determine whether the economic and environmental benefits of building a wind farm at that location will outweigh the environmental cost and disturbances to the school operation.

4.2. Feasibility Analysis

Because of the reason mentioned *Section 4.3.3*, we only have the data available from the AQM65 on top of Dickinson Auditorium and a selection of its data is plotted from *Figure 3* to *8*. Since we lack data regarding wind speed at South Field and Club Field, we cannot determine the feasibility of constructing a wind farm at that location. Therefore, we are only able to determine whether it is feasible to construct a wind farm somewhere near Boardwalk with the data obtained. A wind turbine's power output can be calculated with the following equation:

$$P = 1/2 * k * C_p * \rho * A * V^3 \quad (1)$$

where P is the power generate by the wind turbine measured in kilowatts; k is a constant, 0.000133; C_p is the power coefficient of the wind turbine, usually ranging from 0.25 to 0.45 depending on the specific model; ρ is the air density

around the wind turbine when it is producing power measured in lb/ft^3 ; A is
 250 the area the fan blade of the wind turbine swept through measured in ft^2 ; and
 at last V is the wind speed measured in mph .(Ye et al. (2019))

We can use equation 1 to arrive at a plot for the instantaneous power gener-
 ation for the wind turbine if one is build on top of Dickinson Auditorium. After
 computing the power generation of the possible wind turbine for the time period
 255 of a day, a week and a month, we arrive at *Figure 9* for one day generation,
Figure 10 for one week generation, and *Figure 11* for one month generation. Af-
 ter the plot for instantaneous power generation is obtained, we approximate the
 integral of the curve by using the Riemann sum using the following equation.

$$Interval = \frac{total\ time}{averaging\ period} \quad (2)$$

$$q \sum_{n=1}^{interval} interval * P \quad (3)$$

260 As the result, the estimated power generation of a wind turbine placed at
 Boardwalk would be $36.78kWh$ per day, $259.51kWh$ per week, and $942.92kWh$
 per month. According to 2019 Green Cup Challenge data², Middle Dorm alone
 used $4640kWh$ in the first week of Green Cup Challenge, which means a sin-
 gle turbine only generates 5.6% of the electricity consumption of the Middle
 265 Dorm. The entire campus used $72,091kWh$ during the first week of Green Cup
 Challenge, meaning that around 280 wind turbines are needed to generate the
 electricity needed by the entire school. Therefore, a small scale wind farm at
 Kent will not contribute to the relieve of electrical consumption of the school.

Looking at the economic feasibility of the construction of a wind farm, with
 270 CT commercial electricity rate being $14.65\text{¢}/kWh$ (Administration (2019)) we
 can estimate that a single wind turbine is going to save Kent School $\$5.39$ per
 day, $\$38.02$ per week, and $\$138.11$ per month. The general installation cost of
 a single $10kW$ wind turbine is around $\$50,000$ with the turbine itself costing

²Data acquired from J. Klingebiel, Science Department Head, Kent School

around \$40,000 if ignore the transportation cost of the wind turbine(Power).

275 This means that a 10kW wind turbine installed around Boardwalk is going to pay itself back in 25 years. Since the general life span of a wind turbine is around 20 to 25 years, this will be an even investment for the school with no financial gain or loss.

As the result of the analysis of the power generation data, it is obvious that
280 constructing a wind farm around Boardwalk is economically viable with no obvious gain and loss, but would not contribute to reducing the school's demand on electricity produced by traditional fossil fuel sources. Also, as demonstrated in *Figure 1*, we can see that students actually do not think that constructing a wind farm near Boardwalk is going to have negative influence on the aesthetic
285 beauty of the campus. The only thing that needs to be considered is the content described in Location Determination Factor 3 described in 2.2 that the construction and operation of wind turbines near an area of frequency student activities such as Boardwalk might result in disturbances to normal school operations during the construction phase and noise pollution after wind turbines
290 are put into operation. But in general, the construction of a small-scale wind farm near Boardwalk is feasible if we can find a clear field on the ground with ample area for the construction.

4.3. Error Analysis

Though we tried for our best to consider potential locations around the
295 campus that will qualify for the construction of a wind farm, huge experimental error is introduced when determining the feasibility of the location. Most of the experimental errors are introduced during the feasibility determination process when the wind speed at South Field, Club Field and Boardwalk are measured.

4.3.1. Unrealistic height of anemometer

300 For the HoldPeak 856B anemometer, we installed the anemometer on top of a standard commercial camera tripod. Therefore, the maximum height of measurement for the anemometer was 2m above ground level. A usual commercial

wind turbine is not located at this height, apparently, since at this level, the movement of the wind is going to be obstructed by surrounding physical objects, such as buildings (Hoerle Hall and Hockey Rink) and natural objects(Trees), and the wind speed pattern is going to be erratic. As a result, the wind speed measured by the HoldPeak instrument at South Field and Club Field does not accurately reflect the actual wind speed, and wind speed pattern an industrial wind turbine installed at those locations will experience.

The same bias also exists in the data obtained from the AQM65 located on top of Dickinson Auditorium. Although AQM65 is located substantially higher than the HoldPeak instrument measuring the wind speed at Club Field and South Field, it is still at a much lower altitude than a regular wind turbine, which on average is about 100m from the ground. Therefore, the data obtained from AQM65 also does not reflect the wind speed and wind speed pattern at the height where a wind turbine will be installed.

However, due to limited measuring equipment, we can only measure the wind speed close to ground level. Therefore, the wind speed data obtained from AQM65 and HoldPeak 865B will be used as indicators for the wind speed at a higher altitude of that location.

4.3.2. Single direction measurement

The fact that wind speed can only be measured from a constant angle by the measuring fan is a problem for the HoldPeak instrument. Modern wind turbines all possess the ability to yaw, pitch, and rotate horizontally to match up to the direction of the wind to obtain highest wind speed; thus, the optimal amount of power generation. From *Figure 12* we can see that the fan-like design of the HoldPeak 865B makes it only capable of measuring the speed of wind coming from one direction. When the wind changes direction, it will register on HoldPeak as decreased wind speed rather than a change of direction, contributing bias in the final wind speed data.

This is not a problem with the AQM65 on top of Dickinson Auditorium because it measures and records wind speed with three cup-shaped structures,

making it responsive to winds coming from all directions.



Figure 12: Picture of HoldPeak 822B

4.3.3. Data Destruction

335 The worst error introduced into this study is the loss of the wind speed data
of Club Field and South Field from the HoldPeak. Since a Raspberry Pi was
used to record the data coming from the HoldPeak instrument since HoldPeak
officially only provide a windows-based application and it is unrealistic to use a
laptop computer to collect data because its battery will not last for 24 hours,
340 we determined that we are not going to measure the wind speed data during
rainy days because Raspberry Pi is not water-proof. However, failure to check
the newest weather report on 5/21/2019 resulted in Raspberry Pi's exposure in
the rain for an extended period of time - about 1 hour and caused the main
circuit board of the Raspberry Pi to short out, burning out the Micro-SD card
345 that was holding the wind speed data. Because of the ill-preparedness that CL
and Aaron had toward accidents like this, we did not previously backup the
data on Raspberry Pi onto another computer. Therefore, every recorded wind
speed data for Club Field and South Field were destroyed and lost, leaving us
with only the data from the AQM65 on top of Dickinson Auditorium.

350 References

- Administration, U. E. I. (2019). *Electric Power Monthly with Data for March 2019*. URL: https://www.eia.gov/electricity/monthly/epm_table_grapher.php?t=epmt_5_6_a.
- Alan Pounds, J., Bustamante, M. R., Coloma, L. A., Consuegra, J. A., Fogden,
 355 M. P. L., Foster, P. N., La Marca, E., Masters, K. L., Merino-Viteri, A., Puschendorf, R., Ron, S. R., Sánchez-Azofeifa, G. A., Still, C. J., & Young, B. E. (2006). Widespread amphibian extinctions from epidemic disease driven by global warming. *Nature*, 439, 161–167. URL: <https://doi.org/10.1038/nature04246>. doi:10.1038/nature04246.
- 360 Awerbuch, S., & Morthorst, P.-E. (). The economics of wind energy. *The European Wind Energy Association*, . URL: <http://www.ewea.org>.
- Blanco, M. I. (2009). The economics of wind energy. *Renewable and Sustainable Energy Reviews*, 13, 1372 – 1382. URL: <http://www.sciencedirect.com/science/article/pii/S1364032108001299>.
 365 doi:<https://doi.org/10.1016/j.rser.2008.09.004>.
- Denny, E., & O'Malley, M. (2006). Wind generation, power system operation, and emissions reduction. *IEEE Transactions on Power Systems*, 21, 341–347. doi:10.1109/TPWRS.2005.857845.
- Höök, M., & Tang, X. (2013). Depletion of fossil fuels and anthropogenic
 370 climate change—a review. *Energy Policy*, 52, 797 – 809. URL: <http://www.sciencedirect.com/science/article/pii/S0301421512009275>. doi:<https://doi.org/10.1016/j.enpol.2012.10.046>. Special Section: Transition Pathways to a Low Carbon Economy.
- Kaldellis, J., & Apostolou, D. (2017). Life cycle energy and carbon footprint of offshore wind energy. comparison with onshore
 375 counterpart. *Renewable Energy*, 108, 72 – 84. URL: <http://www.sciencedirect.com/science/article/pii/S0960148117300011>.

[//www.sciencedirect.com/science/article/pii/S0960148117301258](http://www.sciencedirect.com/science/article/pii/S0960148117301258).

doi:<https://doi.org/10.1016/j.renene.2017.02.039>.

Laboratory, N. E. T. (2010). *Volume 1: Bituminous Coal and Natural Gas to Electricity* volume 1. URL: <https://www.nrc.gov/docs>.

Power, B. W. (). Residential wind energy systems - bergey wind power. URL: <http://bergey.com/wind-school/residential-wind-energy-systems>.

Samal, R. K., & Tripathy, M. (2019). Cost savings and emission reduction capability of wind-integrated power systems. *International Journal of Electrical Power & Energy Systems*, 104, 549 – 561. URL: <http://www.sciencedirect.com/science/article/pii/S0142061517312814>. doi:<https://doi.org/10.1016/j.ijepes.2018.07.039>.

Shakun, J. D., Clark, P. U., He, F., Marcott, S. A., Mix, A. C., Liu, Z., Otto-Bliesner, B., Schmittner, A., & Bard, E. (2012). Global warming preceded by increasing carbon dioxide concentrations during the last deglaciation. *Nature*, 484, 49 EP –. URL: <https://doi.org/10.1038/nature10915>. Article.

Ye, L., Zhang, C., Xue, H., Li, J., Lu, P., & Zhao, Y. (2019). Study of assessment on capability of wind power accommodation in regional power grids. *Renewable Energy*, 133, 647 – 662. URL: <http://www.sciencedirect.com/science/article/pii/S0960148118312266>. doi:<https://doi.org/10.1016/j.renene.2018.10.042>.