
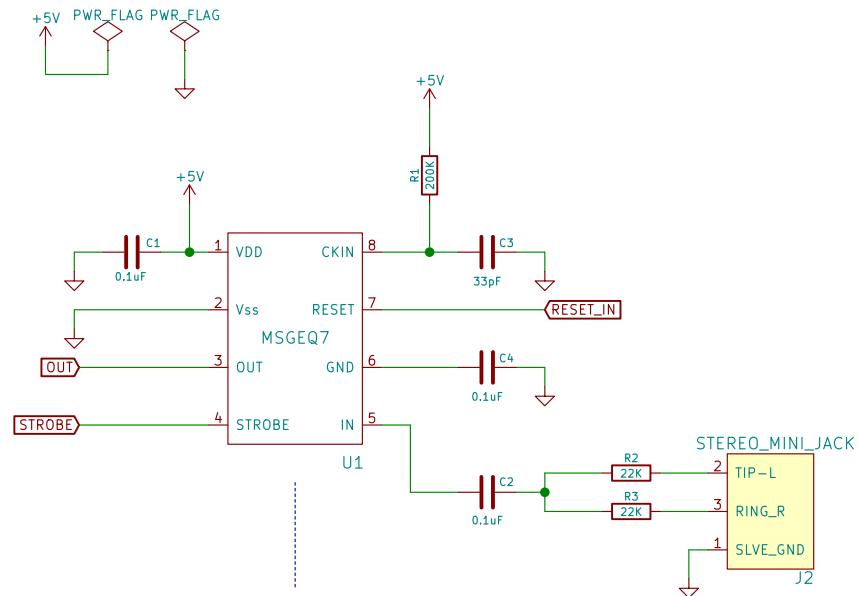


Six Pin .1" Header



MSGEQ7 will require 8 pin DIP footprint as requested by former backers to aid in hand soldering

Clarification needed from former backers on whether they prefer stereo mini jack or .1" header for audio input

Update to KiCad v4.0.0_RC1
Breakout board for the Mixed Signals Integration MSGEQ7
Rheingold Heavy

Sheet: /
File: MSGEQ7_Breakout_Board.sch

Title: MSGEQ7 Breakout Board

Size: A4 Date: 2015-10-27

KiCad E.D.A. kicad 4.0.0-rc1-stable

Rev: B

Id: 1/1