
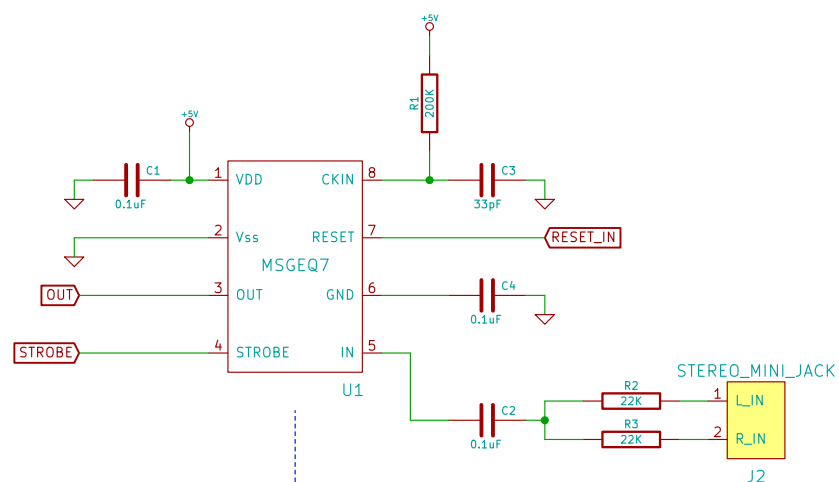


Six Pin .1" Header



MSGEQ7 will require 8 pin DIP footprint as requested by former backers to aid in hand soldering

Clarification needed from former backers on whether they prefer stereo mini jack or .1" header for audio input

Breakout board for the Mixed Signals Integration MSGEQ7		
Rheingold Heavy		
File: MSGEQ7_Breakout_Board.sch		
Sheet: /		
Title: MSGEQ7 Breakout Board		
Size: A4	Date: 9 dec 2014	Rev: A
KiCad E.D.A.		Id: 1/1