SOURCE DIRECT_CRANK_FLUSH_M2_L | orthographic XY / XZ / YZ | dimensions mm


metal crank; 1.9 mm fixed G bore; flush counterbores leave 0.4 mm floor; strength UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; CrankThroughBoresL depth/length 1.2 mm; CrankFlushCounterboresL depth/length 0.8 mm

XY

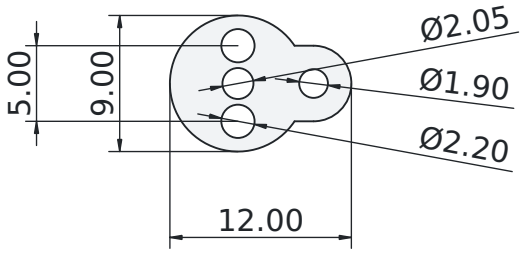



YZ




XZ



ISO



DIRECT_CRANK_FLUSH_M2_L

steel | CUSTOM

SHEET 001 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE DIRECT_CRANK_FLUSH_M2_R | orthographic XY / XZ / YZ | dimensions mm


metal crank; 1.9 mm fixed G bore; flush counterbores leave 0.4 mm floor; strength UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; CrankThroughBoresR depth/length 1.2 mm; CrankFlushCounterboresR depth/length 0.8 mm

XY

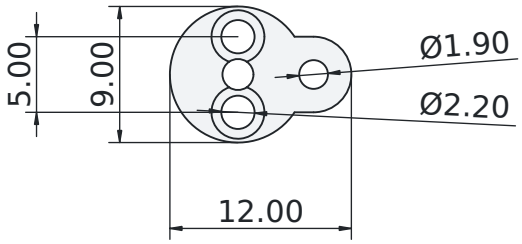


YZ




XZ



ISO



DIRECT_CRANK_FLUSH_M2_R

steel | CUSTOM

SHEET 002 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE FIXED_TIE_M2_CORE_L2p8 | orthographic XY / XZ / YZ | dimensions mm


candidate short M2 tie screw; 1.2 mm nominal end engagement; minor-core envelope, no helical threads; supplier UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 2.8 mm; Head depth/length 0.8 mm

XY

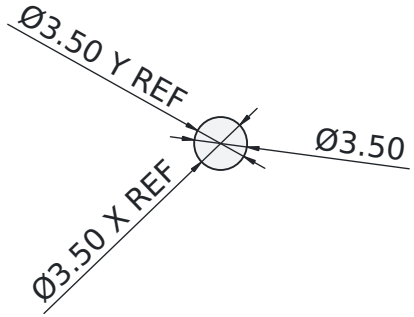


YZ




XZ



ISO



FIXED_TIE_M2_CORE_L2p8

steel | CUSTOM

SHEET 003 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE FIXED_TIE_OD2p4_TAPMINOR1p7_L53p6 | orthographic XY / XZ / YZ | dimensions mm


metal threaded spacer tube, candidate M2 tapped ends; supplier UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 53.6 mm

XY

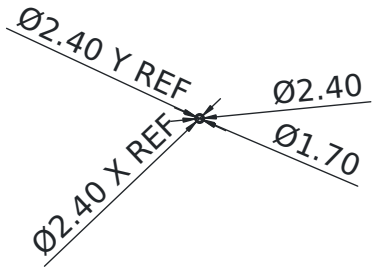


YZ




XZ



ISO



FIXED_TIE_OD2p4_TAPMINOR1p7_L53p6

steel | HARDWARE

SHEET 004 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.


SOURCE FRM_LUMBAR_ROUNDED_CRADLE_L_r07_final | orthographic XY / XZ / YZ | dimensions mm

DESIGN_ASSUMPTION Movie S1 broad rectangular cradle perimeter, curved lower opening, widened upper window and tapered pedesta l ears; mounting interfaces/fits/preload UNVERIFIED


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: CaseWindowBase depth/length 1.6 mm; LocalEndPlatform0 depth/length 1.6 mm; LocalEndPlatform1 depth/length 1.6 mm; ShortEarE1A2 depth/length 1.6 mm; ShortEarE2A1 depth/length 1.6 mm; BroadShelf0 depth/length 11 mm; BroadShelf1 depth/length 11 mm; OuterGuide0 depth/length 1.6 mm; OuterGuide1 depth/length 1.6 mm; BraceBoss0 depth/length 1.6 mm; BraceBoss1 depth/length 1.6 mm; BraceBoss2 depth/length 1.6 mm; BraceBoss3 depth/length 1.6 mm; CaseEdgeCollar

XY

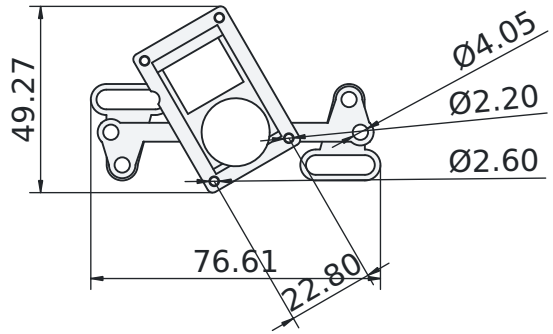



YZ




XZ



ISO



FRM_LUMBAR_ROUNDED_CRADLE_L_r07_final

PA12 | CUSTOM

SHEET 005 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.


SOURCE FRM_LUMBAR_ROUNDED_CRADLE_R_r07_final | orthographic XY / XZ / YZ | dimensions mm

DESIGN_ASSUMPTION Movie S1 broad rectangular cradle perimeter, curved lower opening, widened upper window and tapered pedesta l ears; mounting interfaces/fits/preload UNVERIFIED


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: CaseWindowBase depth/length 1.6 mm; LocalEndPlatform0 depth/length 1.6 mm; LocalEndPlatform1 depth/length 1.6 mm; ShortEarE1A2 depth/length 1.6 mm; ShortEarE2A1 depth/length 1.6 mm; BroadShelf0 depth/length 11 mm; BroadShelf1 depth/length 11 mm; OuterGuide0 depth/length 1.6 mm; OuterGuide1 depth/length 1.6 mm; BraceBoss0 depth/length 1.6 mm; BraceBoss1 depth/length 1.6 mm; BraceBoss2 depth/length 1.6 mm; BraceBoss3 depth/length 1.6 mm; CaseEdgeCollar

XY

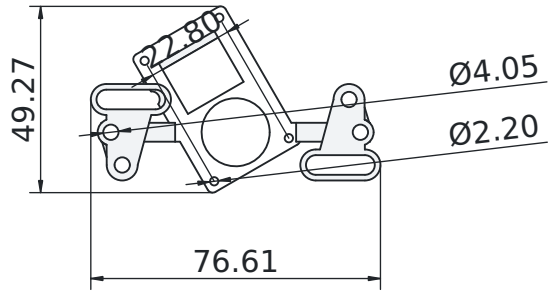



YZ




XZ



ISO



FRM_LUMBAR_ROUNDED_CRADLE_R_r07_final

PA12 | CUSTOM

SHEET 006 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE GUIDE_COPPER_r02 | orthographic XY / XZ / YZ | dimensions mm


machined copper face liner; attachment method UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 0.3 mm; Pocket depth/length 0.3 mm

XY

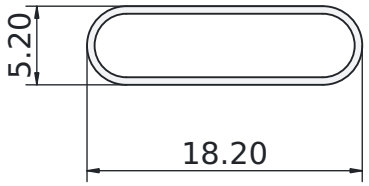



YZ




XZ



ISO



GUIDE_COPPER_r02

copper | CUSTOM



SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE HORN_GAP_WASHER_OD8_T0p3 | orthographic XY / XZ / YZ | dimensions mm


machined gap washer; candidate horn pattern

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 0.3 mm; GapWasherBores depth/length 0.3 mm

XY

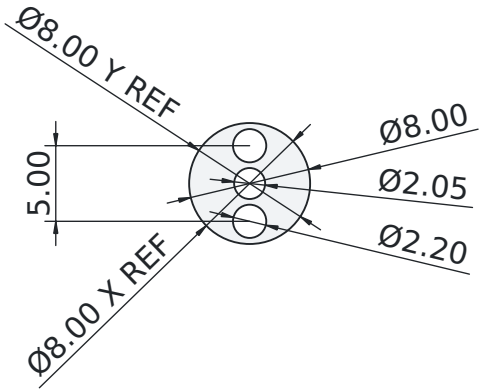



YZ




XZ



ISO



HORN_GAP_WASHER_OD8_T0p3

steel | CUSTOM

SHEET 008 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE HORN_M2_TRIMMED_CORE_L1p9 | orthographic XY / XZ / YZ | dimensions mm


nonstandard trimmed M2 screw candidate; flush head in 0.8 mm counterbore; minor-core envelope, no helical threads; supplier U

NVERIFIED


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.9 mm; Head depth/length 0.8 mm

XY

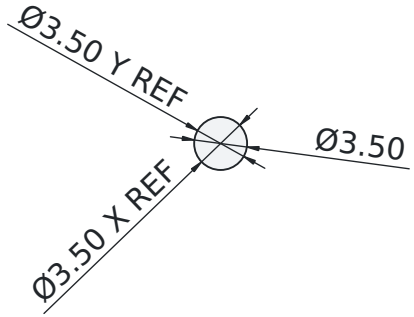


YZ




XZ



ISO



HORN_M2_TRIMMED_CORE_L1p9

steel | CUSTOM

SHEET 009 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE HORN_PATTERN_ASSUMED_OD8_T1p2 | orthographic XY / XZ / YZ | dimensions mm


candidate horn adapter; pattern/spline/output datum NOT ROBOTIS VERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; HornCandidateBores depth/length 1.2 mm

XY

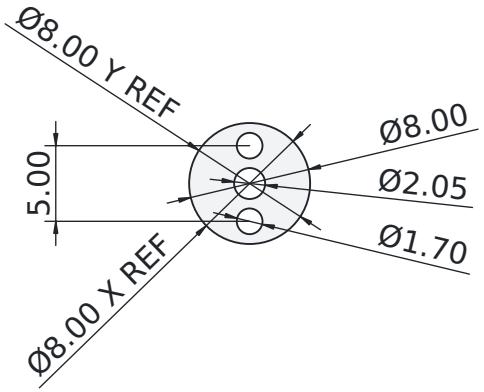


YZ




XZ



ISO



HORN_PATTERN_ASSUMED_OD8_T1p2

steel | CUSTOM

SHEET 010 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE PIN_D1_9_L5_2 | orthographic XY / XZ / YZ | dimensions mm


turned 1.9mm journal; 1.7mm groove roots; provisional spring clip fit; inspect fatigue root

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 8 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm

XY

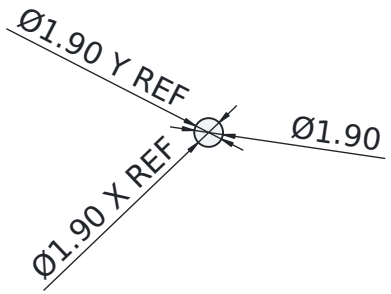


YZ




XZ



ISO



JOURNAL_D1p9_L8_GROOVED

steel | HARDWARE

SHEET 011 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE KNEE_r05_M2_HEX_NUT_AF4_T2p8 | orthographic XY / XZ / YZ | dimensions mm


ASSUMED M2 nut envelope/minor bore; supplier thread/strength unverified

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: KneeNutPad depth/length 2.8 mm

XY




YZ




XZ



ISO



KNEE_r05_M2_HEX_NUT_AF4_T2p8

steel | HARDWARE

SHEET 012 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE KNEE_r05_REMOVABLE_REAR_LOCK | orthographic XY / XZ / YZ | dimensions mm


ASSUMED case-face lock with M2 through bolts; exact case datum/access/load unverified

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: KneeRearLockPlate depth/length 1.2 mm; KneeRearLockContactRib depth/length 1.2 mm

XY

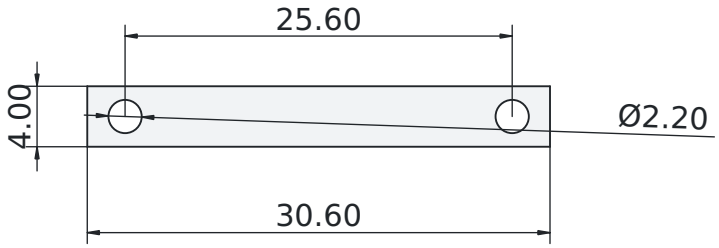



YZ




XZ



ISO

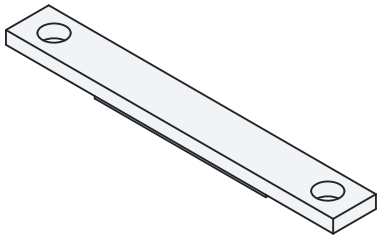

KNEE_r05_REMOVABLE_REAR_LOCK

PA12 | CUSTOM

SHEET 013 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r02_COMPRESSION_PIVOT_SEAT_NATIVE | orthographic XY / XZ / YZ | dimensions mm


machined pivot seat/web and axial coil seat; exact seat retention UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; ReactionPad depth/length 0.6 mm


XY




YZ

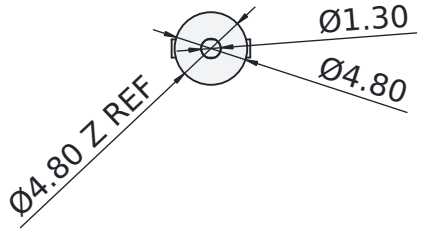


XZ



ISO



LEG_r02_COMPRESSION_PIVOT_SEAT_NATIVE

steel | CUSTOM

SHEET 014 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r02_CURVED_CONTACT_PAD | orthographic XY / XZ / YZ | dimensions mm


molded rubber curved contact; grip/attachment UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 2.4 mm

XY




YZ




XZ



ISO



LEG_r02_CURVED_CONTACT_PAD

rubber | CUSTOM

SHEET 015 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r02_HEADED_PIN_D1p9_L4p8 | orthographic XY / XZ / YZ | dimensions mm


turned 1.9 journal, two native annular grooves; clip standard/fatigue UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 4.8 mm; GroovePocket0 depth/length 0.6 mm; HeadPad depth/length 0.4 mm

XY

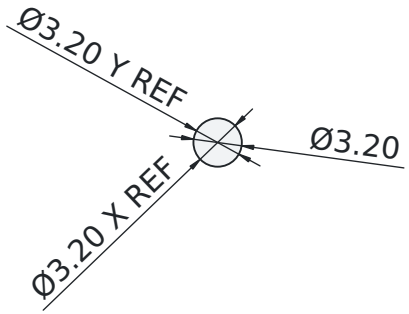


YZ




XZ



ISO



LEG_r02_HEADED_PIN_D1p9_L4p8

steel | HARDWARE

SHEET 016 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r02_JOURNAL_D1p9_L10p75 | orthographic XY / XZ / YZ | dimensions mm


turned 1.9 journal, two native annular grooves; clip standard/fatigue UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 10.75 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm

XY

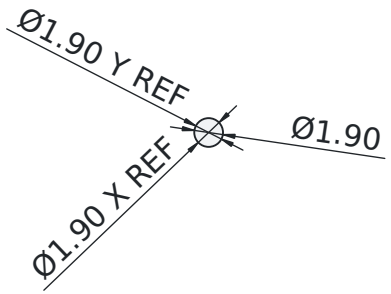


YZ




XZ



ISO



LEG_r02_JOURNAL_D1p9_L10p75

steel | HARDWARE

SHEET 017 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r02_JOURNAL_D1p9_L11p7 | orthographic XY / XZ / YZ | dimensions mm


turned 1.9 journal, two native annular grooves; clip standard/fatigue UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 11.7 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm

XY

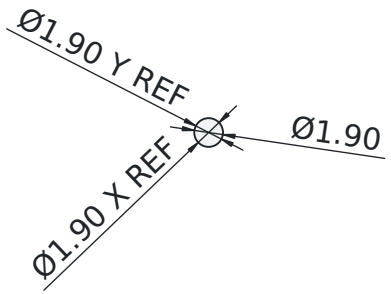


YZ




XZ



ISO



LEG_r02_JOURNAL_D1p9_L11p7

steel | HARDWARE

SHEET 018 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r02_JOURNAL_D1p9_L4p7 | orthographic XY / XZ / YZ | dimensions mm


turned 1.9 journal, two native annular grooves; clip standard/fatigue UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 4.7 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm

XY

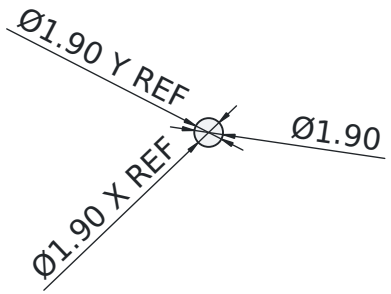


YZ




XZ



ISO



LEG_r02_JOURNAL_D1p9_L4p7

steel | HARDWARE

SHEET 019 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r02_JOURNAL_D1p9_L9p9 | orthographic XY / XZ / YZ | dimensions mm


turned 1.9 journal, two native annular grooves; clip standard/fatigue UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 9.9 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm

XY

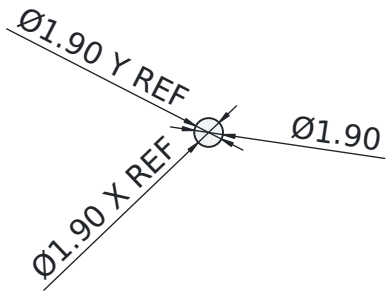


YZ




XZ



ISO



LEG_r02_JOURNAL_D1p9_L9p9

steel | HARDWARE

SHEET 020 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_DIRECT_FORE_RETURN_RAIL | orthographic XY / XZ / YZ | dimensions mm


SLS PA12; native contour; finish bores; provisional fits

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm

XY

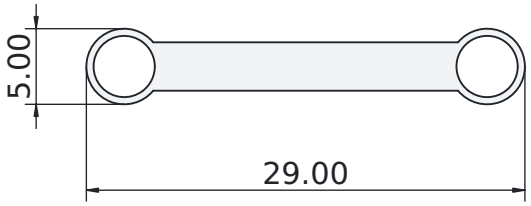



YZ




XZ



ISO



LEG_r03_DIRECT_FORE_RETURN_RAIL

PA12 | CUSTOM

SHEET 021 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_DIRECT_FORE_SHANK | orthographic XY / XZ / YZ | dimensions mm


SLS nylon; finish bores / slots

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; Pocket depth/length 1.2 mm

XY

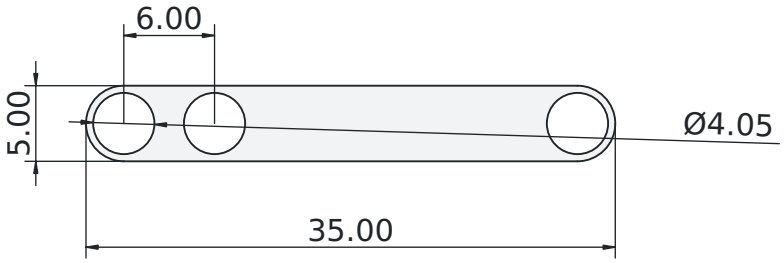



YZ




XZ



ISO

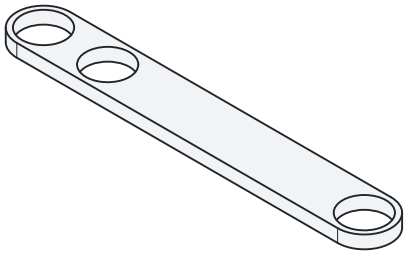

LEG_r03_DIRECT_FORE_SHANK

PA12 | CUSTOM

SHEET 022 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_DIRECT_FORE_THIGH | orthographic XY / XZ / YZ | dimensions mm


SLS nylon; finish bores / slots

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; Pocket depth/length 1.2 mm; ThighKeyPocket depth/length 1.2 mm

XY

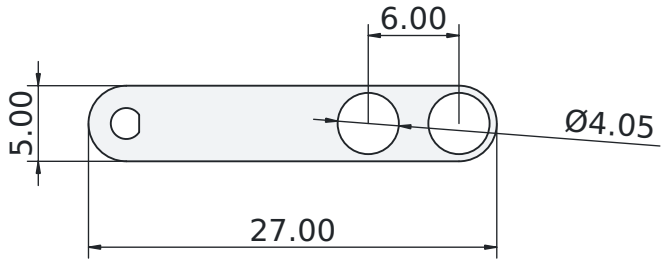



YZ




XZ



ISO



LEG_r03_DIRECT_FORE_THIGH

PA12 | CUSTOM

SHEET 023 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_DIRECT_HIND_RETURN_RAIL | orthographic XY / XZ / YZ | dimensions mm


SLS PA12; native contour; finish bores; provisional fits

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm

XY

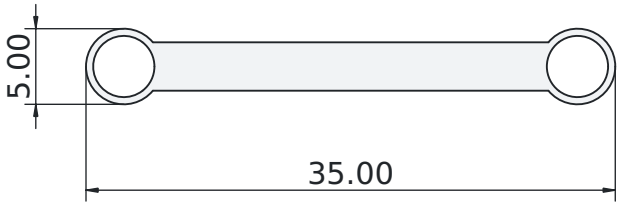



YZ




XZ



ISO

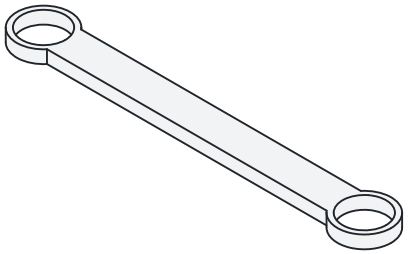

LEG_r03_DIRECT_HIND_RETURN_RAIL

PA12 | CUSTOM

SHEET 024 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_DIRECT_HIND_SHANK | orthographic XY / XZ / YZ | dimensions mm


SLS nylon; finish bores / slots

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; Pocket depth/length 1.2 mm

XY

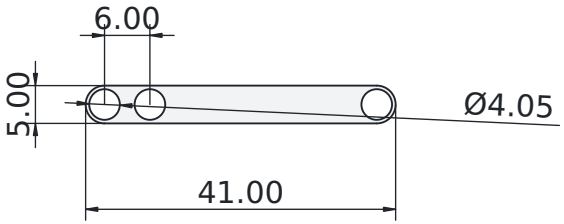



YZ




XZ



ISO



LEG_r03_DIRECT_HIND_SHANK

PA12 | CUSTOM

SHEET 025 / 067

SCALE 1.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_DIRECT_HIND_THIGH | orthographic XY / XZ / YZ | dimensions mm


SLS nylon; finish bores / slots

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; Pocket depth/length 1.2 mm; ThighKeyPocket depth/length 1.2 mm

XY

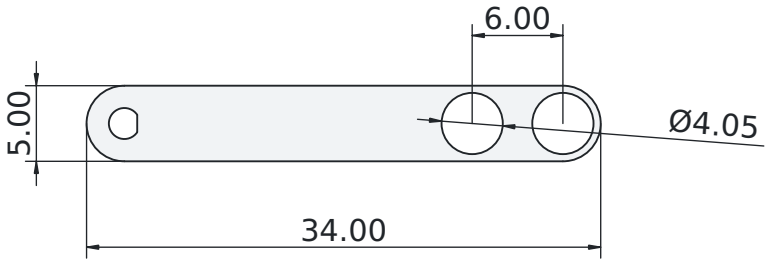



YZ




XZ



ISO

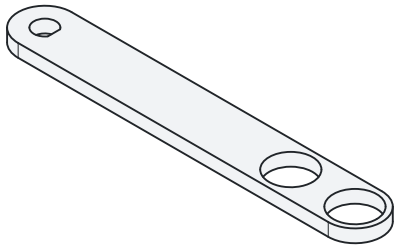

LEG_r03_DIRECT_HIND_THIGH

PA12 | CUSTOM

SHEET 026 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_DUAL_KEYED_H_JOURNAL_D1p9_L10p85 | orthographic XY / XZ / YZ | dimensions mm


turned 1.9 journal, two native annular grooves; clip standard/fatigue UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 10.85 mm; GroovePocket0 depth/length 0.6 mm; DriveKeyPocket0 depth/length 1.2 mm; DriveKeyPocket1 depth/length 1.2 mm

XY

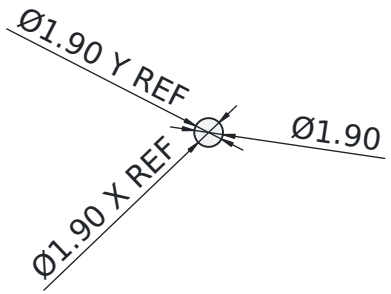


YZ




XZ



ISO



LEG_r03_DUAL_KEYED_H_JOURNAL_D1p9_L10p85

steel | HARDWARE

SHEET 027 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_FORE_BENT_INPUT_HORN_KEYED_SAME_DIRECTION_PROVISIONAL | orthographic XY / XZ / YZ | dimensions mm


fixed bent native horn, assumed +60deg fixed bend / -60deg key offset; motor spline UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; Pocket depth/length 1.2 mm; HornKeyPocket depth/length 1.2 mm

XY

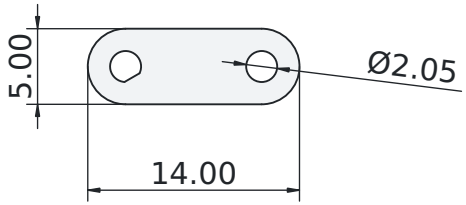



YZ




XZ



ISO



LEG_r03_FORE_BENT_INPUT_HORN_KEYED_SAME_DIRECTION_PROVISIONAL

PA12 | CUSTOM

SHEET 028 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_FORE_CURVED_FOOT_RETURN_TOWARD_HIP | orthographic XY / XZ / YZ | dimensions mm


SLS PA12; native contour; finish bores; provisional fits

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm

XY

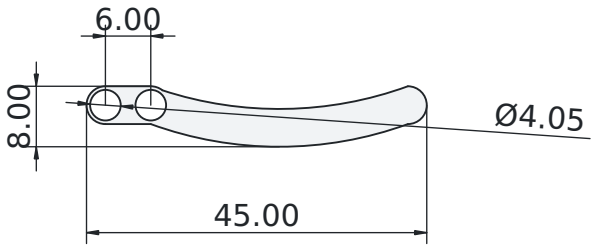



YZ




XZ



ISO



LEG_r03_FORE_CURVED_FOOT_RETURN_TOWARD_HIP

PA12 | CUSTOM

SHEET 029 / 067

SCALE 1.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_HIND_BENT_INPUT_HORN_KEYED_SAME_DIRECTION_PROVISIONAL | orthographic XY / XZ / YZ | dimensions mm


fixed bent native horn, assumed +60deg fixed bend / -60deg key offset; motor spline UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; Pocket depth/length 1.2 mm; HornKeyPocket depth/length 1.2 mm

XY

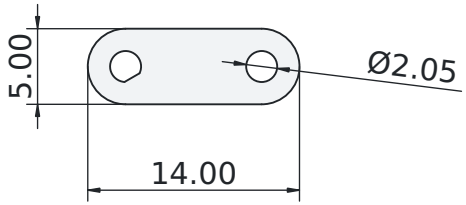



YZ




XZ



ISO



LEG_r03_HIND_BENT_INPUT_HORN_KEYED_SAME_DIRECTION_PROVISIONAL

PA12 | CUSTOM

SHEET 030 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r03_HIND_CURVED_FOOT_RETURN_TOWARD_HIP | orthographic XY / XZ / YZ | dimensions mm


SLS PA12; native contour; finish bores; provisional fits

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm

XY

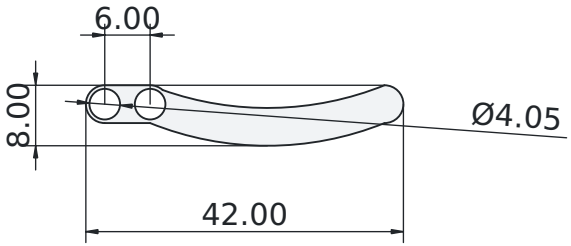



YZ




XZ



ISO



LEG_r03_HIND_CURVED_FOOT_RETURN_TOWARD_HIP

PA12 | CUSTOM

SHEET 031 / 067

SCALE 1.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r05_ANKLE_SPACER_OD3_ID2p05_L2p6 | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION turned steel spacer; axial fit/strength UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 2.6 mm

XY

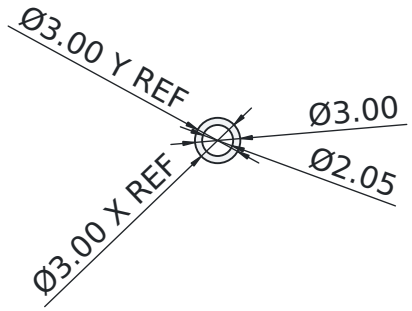


YZ




XZ



ISO



LEG_r05_ANKLE_SPACER_OD3_ID2p05_L2p6

steel | HARDWARE

SHEET 032 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r07_ANKLE_CLAMP_L_OD6_ID2p05_T2p4 | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION steel swivel; radialØ.4 blind1.2; M1.4 minorØ1.1 axialtap; no threadcrests

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 2.4 mm; RadialPocket depth/length 1.2 mm; TapPocket depth/length 1.85 mm

XY

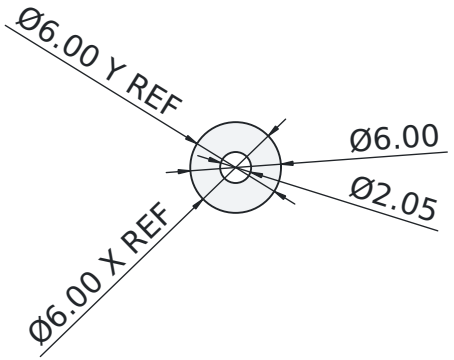



YZ




XZ



ISO



LEG_r07_ANKLE_CLAMP_L_OD6_ID2p05_T2p4

steel | HARDWARE

SHEET 033 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r07_ANKLE_CLAMP_R_OD6_ID2p05_T2p4 | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION steel swivel; radialØ.4 blind1.2; M1.4 minorØ1.1 axialtap; no threadcrests

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 2.4 mm; RadialPocket depth/length 1.2 mm; TapPocket depth/length 1.85 mm

XY

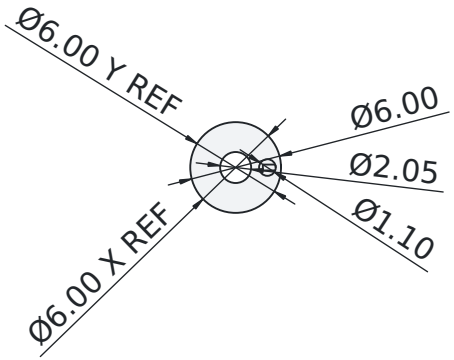



YZ




XZ



ISO



LEG_r07_ANKLE_CLAMP_R_OD6_ID2p05_T2p4

steel | HARDWARE

SHEET 034 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r07_ANKLE_JOURNAL_L_D1p9_L15p05 | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION anklejournal absY44.75..59.8; clipcenters45.25/59.2; no strengthqualification

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 15.05 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm

XY

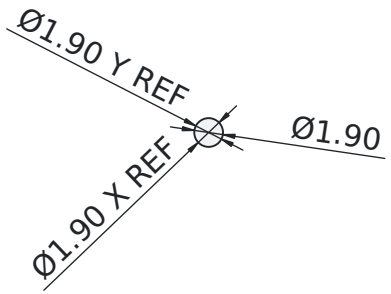


YZ




XZ



ISO



LEG_r07_ANKLE_JOURNAL_L_D1p9_L15p05

steel | HARDWARE

SHEET 035 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r07_ANKLE_JOURNAL_R_D1p9_L15p05 | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION anklejournal absY44.75..59.8; clipcenters45.25/59.2; no strengthqualification

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 15.05 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm

XY

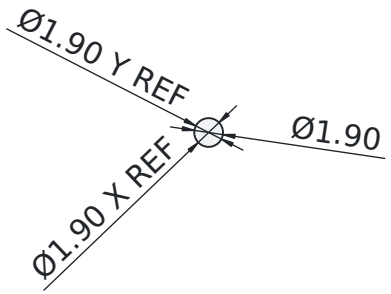


YZ




XZ



ISO



LEG_r07_ANKLE_JOURNAL_R_D1p9_L15p05

steel | HARDWARE

SHEET 036 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE LEG_r07_M1p4_ANKLE_GRUB_CORE1p1_L1p65 | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION flat-tip grub, native .6AF socket, unverified thread/strength

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.65 mm; SocketPocket depth/length 0.5 mm

XY

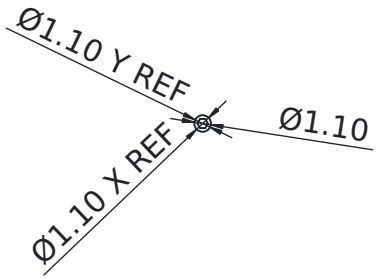


YZ




XZ



ISO



LEG_r07_M1p4_ANKLE_GRUB_CORE1p1_L1p65

steel | HARDWARE

SHEET 037 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE MOTOR_CENTER_INSULATING_SHIM_T0p8 | orthographic XY / XZ / YZ | dimensions mm


insulating prototype shim; nominal tangent case pack; compression allowance UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 0.8 mm

XY

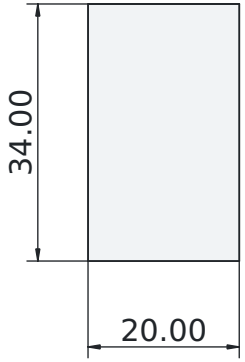



YZ




XZ



ISO



MOTOR_CENTER_INSULATING_SHIM_T0p8

PA12 | CUSTOM

SHEET 038 / 067

SCALE 1.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.


SOURCE OpenRB150_Carrier_r07_EdgeRetainerLeft | orthographic XY / XZ / YZ | dimensions mm

DESIGN_ASSUMPTION adjustable positive split-tie carrier; board holes not modeled; edge population, fits, fastener engagement, print strength and clearance UNVERIFIED; assumed 0.5 mm edge overlap

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: RetainerStripPad depth/length 0.8 mm; RetainerBoltClearance depth/length 0.8 mm

XY




YZ




XZ



ISO



OpenRB150_Carrier_r07_EdgeRetainerLeft

PA12 | CUSTOM

SHEET 039 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.


SOURCE OpenRB150_Carrier_r07_EdgeRetainerRight | orthographic XY / XZ / YZ | dimensions mm

DESIGN_ASSUMPTION adjustable positive split-tie carrier; board holes not modeled; edge population, fits, fastener engagement, print strength and clearance UNVERIFIED; assumed 0.5 mm edge overlap

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: RetainerStripPad001 depth/length 0.8 mm; RetainerBoltClearance001 depth/length 0.8 mm

XY

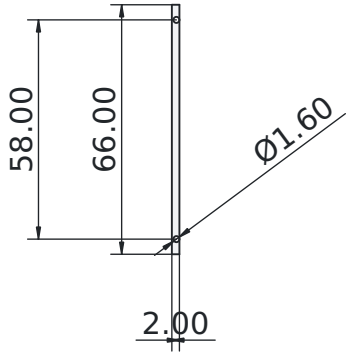


YZ




XZ

ISO



OpenRB150_Carrier_r07_EdgeRetainerRight

PA12 | CUSTOM

SHEET 040 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE OpenRB150_Carrier_r07_M1p4RetainerBolt | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION M1.4 bolt envelope; thread/strength unverified

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: ZboltCorePad depth/length 4.8 mm; ZboltHeadPad depth/length 0.7 mm; ZboltHexSocket depth/length 0.35 mm

XY

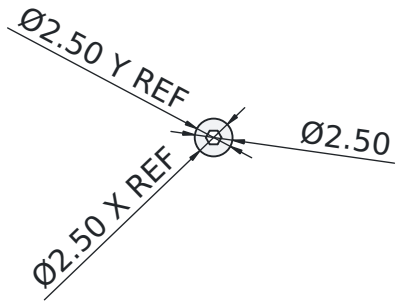


YZ




XZ



ISO



## OpenRB150_Carrier_r07_M1p4RetainerBolt

steel | CUSTOM

SHEET 041 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE OpenRB150_Carrier_r07_M1p4SplitClampBolt | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION M1.4 bolt envelope; thread/strength unverified

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: XboltCorePad depth/length 8.8 mm; XboltHeadPad depth/length 0.7 mm; XboltHexSocket depth/length 0.35 mm

XY

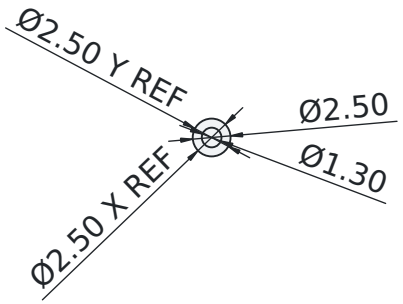


YZ




XZ



ISO



OpenRB150_Carrier_r07_M1p4SplitClampBolt

steel | CUSTOM

SHEET 042 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE OpenRB150_Carrier_r07_SplitClampCaps | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION machined split-clamp caps; cap material and fits unverified

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: SplitClampCapPad depth/length 4 mm; CapBoltClearance depth/length 4.1 mm

XY




YZ




XZ



ISO



OpenRB150_Carrier_r07_SplitClampCaps

steel | CUSTOM

SHEET 043 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.


SOURCE OpenRB150_Carrier_r07_Tray | orthographic XY / XZ / YZ | dimensions mm

DESIGN_ASSUMPTION adjustable positive split-tie carrier; board holes not modeled; edge population, fits, fastener engagement, print strength and clearance UNVERIFIED


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: TrayPlatePad depth/length 1.2 mm; BoardEdgeSupportLeft depth/length 1.2 mm; BoardEdgeSupportRight depth/length 1.2 mm; TieSupportArmPost0 depth/length 4 mm; TieSupportArmPost1 depth/length 4 mm; SplitClampBoltClearance depth/length 4.1 mm; RetainerThroughHoles depth/length 1.2 mm

XY

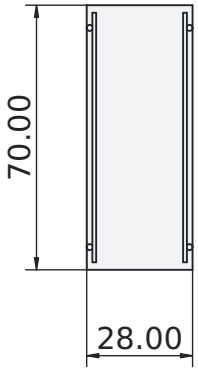



YZ




XZ



ISO



OpenRB150_Carrier_r07_Tray

PA12 | CUSTOM

SHEET 044 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE RETAINING_CLIP_1p7x3p6_T0p6_PROVISIONAL | orthographic XY / XZ / YZ | dimensions mm


spring steel split clip envelope; vendor/groove standard UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: ClipPad depth/length 0.6 mm

XY




YZ




XZ



ISO



RETAINING_CLIP_1p7x3p6_T0p6_PROVISIONAL

steel | HARDWARE

SHEET 045 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPINE_r04_A1_STEPPED_CROSS_SHAFT_L85p6 | orthographic XY / XZ / YZ | dimensions mm

turned steel stepped cross-shaft; clip standard and stiffness UNVERIFIED


Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 85.6 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm;

CenterShoulder depth/length 54 mm

XY

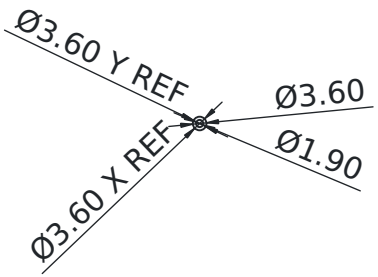


YZ




XZ



ISO



SPINE_r04_A1_STEPPED_CROSS_SHAFT_L85p6

steel | HARDWARE

SHEET 046 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPINE_r04_A2_STEPPED_CROSS_SHAFT_L85p6 | orthographic XY / XZ / YZ | dimensions mm

turned steel stepped cross-shaft; clip standard and stiffness UNVERIFIED


Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 85.6 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm;

CenterShoulder depth/length 54 mm

XY

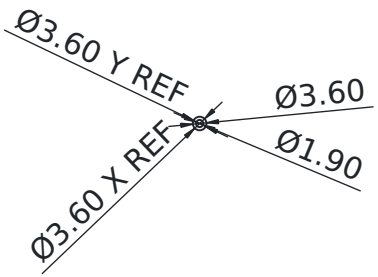


YZ




XZ



ISO



SPINE_r04_A2_STEPPED_CROSS_SHAFT_L85p6

steel | HARDWARE



SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPINE_r04_B1_STEPPED_CROSS_SHAFT_L72 | orthographic XY / XZ / YZ | dimensions mm

turned steel stepped cross-shaft; clip standard and stiffness UNVERIFIED


Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 72 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm;

CenterShoulder depth/length 60 mm

XY

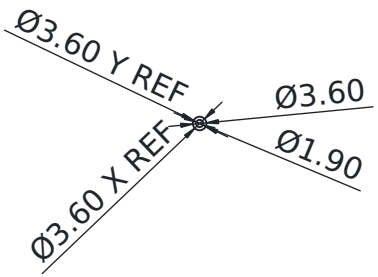


YZ




XZ



ISO



SPINE_r04_B1_STEPPED_CROSS_SHAFT_L72

steel | HARDWARE

SHEET 048 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPINE_r04_B2_STEPPED_CROSS_SHAFT_L72 | orthographic XY / XZ / YZ | dimensions mm

turned steel stepped cross-shaft; clip standard and stiffness UNVERIFIED


Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 72 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm;

CenterShoulder depth/length 60 mm

XY

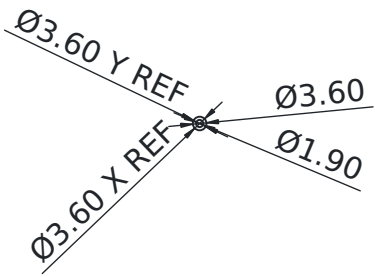


YZ




XZ



ISO



SPINE_r04_B2_STEPPED_CROSS_SHAFT_L72

steel | HARDWARE

SHEET 049 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPINE_r04_C1_STEPPED_CROSS_SHAFT_L85p6 | orthographic XY / XZ / YZ | dimensions mm


turned steel stepped cross-shaft; clip standard and stiffness UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 85.6 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm; CenterShoulder depth/length 67.2 mm

XY

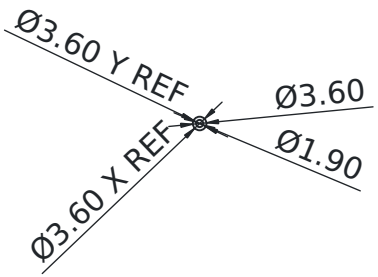


YZ




XZ



ISO



SPINE_r04_C1_STEPPED_CROSS_SHAFT_L85p6

steel | HARDWARE

SHEET 050 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPINE_r04_C2_STEPPED_CROSS_SHAFT_L85p6 | orthographic XY / XZ / YZ | dimensions mm

turned steel stepped cross-shaft; clip standard and stiffness UNVERIFIED


Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 85.6 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm;

CenterShoulder depth/length 67.2 mm

XY

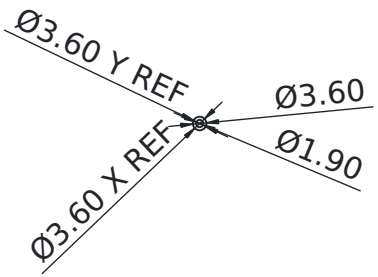


YZ




XZ



ISO



SPINE_r04_C2_STEPPED_CROSS_SHAFT_L85p6

steel | HARDWARE

SHEET 051 / 067

SCALE 0.5:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPINE_r04_CAPTURE_CAP_NEG | orthographic XY / XZ / YZ | dimensions mm


candidate silver capture collar; shoulder plus recessed split clip; exact source nut/thread/retention interface UNKNOWN

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 0.6 mm; ClipCavityWall depth/length 1.8 mm

XY

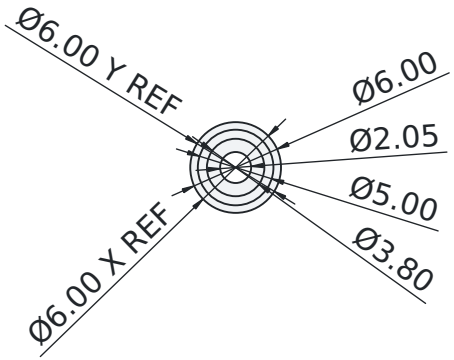


YZ




XZ



ISO



SPINE_r04_CAPTURE_CAP_NEG

steel | HARDWARE

SHEET 052 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPINE_r04_CAPTURE_CAP_POS | orthographic XY / XZ / YZ | dimensions mm


candidate silver capture collar; shoulder plus recessed split clip; exact source nut/thread/retention interface UNKNOWN

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 0.6 mm; ClipCavityWall depth/length 1.8 mm

XY

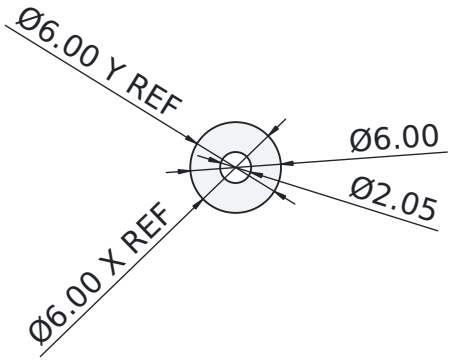


YZ




XZ



ISO



SPINE_r04_CAPTURE_CAP_POS

steel | HARDWARE

SHEET 053 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPN_r02_L2 | orthographic XY / XZ / YZ | dimensions mm


SLS nylon; finish bores / slots

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; Pocket depth/length 1.2 mm

XY

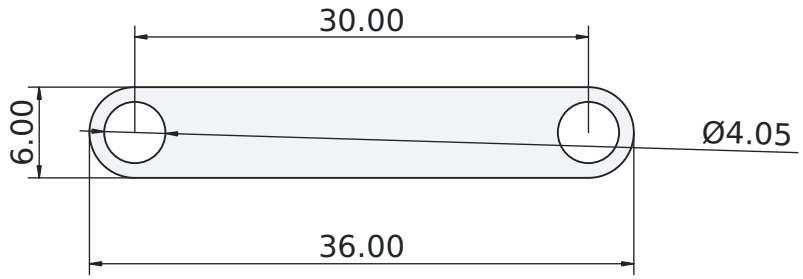



YZ




XZ



ISO

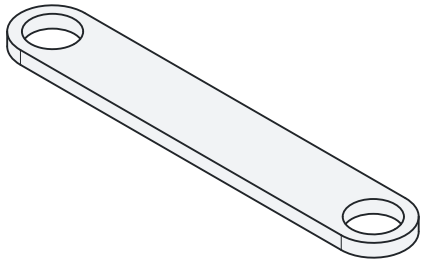

SPN_r02_L2

PA12 | CUSTOM

SHEET 054 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPN_r02_L3 | orthographic XY / XZ / YZ | dimensions mm


SLS nylon; finish bores / slots

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; Pocket depth/length 1.2 mm

XY

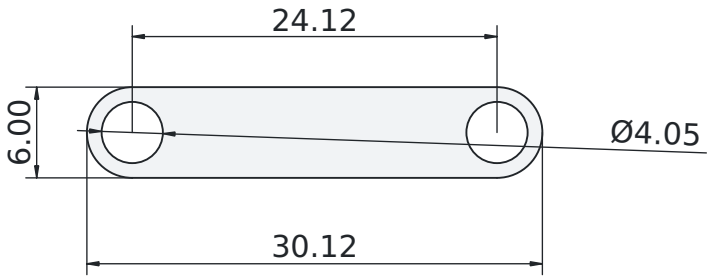



YZ




XZ



ISO

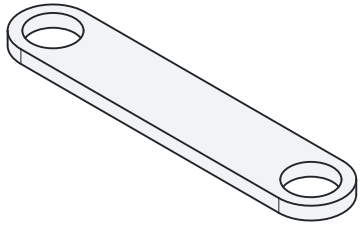

SPN_r02_L3

PA12 | CUSTOM

SHEET 055 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPN_r02_L4 | orthographic XY / XZ / YZ | dimensions mm


SLS nylon; finish bores / slots

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; Pocket depth/length 1.2 mm

XY

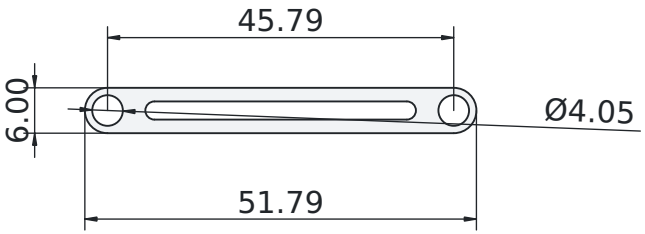



YZ




XZ



ISO



SPN_r02_L4

PA12 | CUSTOM

SHEET 056 / 067

SCALE 1.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE SPN_r02_L5 | orthographic XY / XZ / YZ | dimensions mm


SLS nylon; finish bores / slots

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; Pocket depth/length 1.2 mm

XY

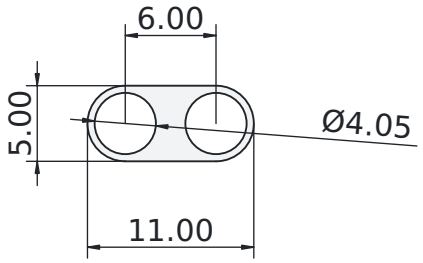



YZ




XZ



ISO



SPN_r02_L5

PA12 | CUSTOM

SHEET 057 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE TENDON_r04_D_DRIVE_Rp95_Fp8_L3p7 | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION D adapter; manufacturer spline/output screw/axial coupling UNKNOWN

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 3.7 mm; GroovePocket depth/length 0.6 mm

XY




YZ




XZ



ISO



TENDON_r04_D_DRIVE_Rp95_Fp8_L3p7

steel | HARDWARE

SHEET 058 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE TENDON_r04_GUIDE_OD5p4_ID2p05_L1p2 | orthographic XY / XZ / YZ | dimensions mm


ASSUMED finite guide pitch R2.5; mounting journal/support UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; CenterGroovePocket depth/length 0.5 mm

XY

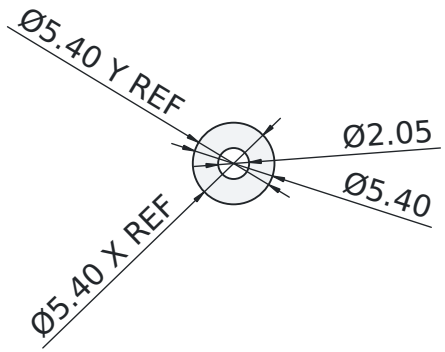


YZ




XZ



ISO



TENDON_r04_GUIDE_OD5p4_ID2p05_L1p2

PA12 | HARDWARE

SHEET 059 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE TENDON_r04_HEADED_GUIDE_SHAFT_D1p9_L3p6 | orthographic XY / XZ / YZ | dimensions mm


ASSUMED headed fixed guide journal; mounting support unresolved

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 3.6 mm; OuterRetainingGroovePocket depth/length 0.6 mm; InnerHead depth/length 0.3 mm

XY

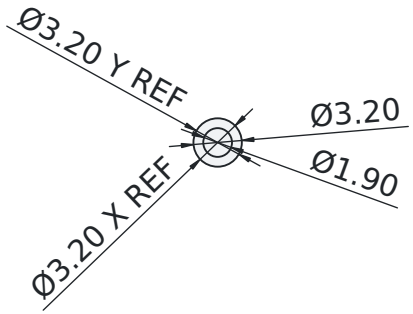


YZ




XZ



ISO



TENDON_r04_HEADED_GUIDE_SHAFT_D1p9_L3p6

steel | HARDWARE

SHEET 060 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE TENDON_r07_M1_ANCHOR_BOLT_COREp75_L2p2_HEAD1p6 | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION M1coreØ.75+headØ1.6; threadcrests omitted

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 2.2 mm; HeadPad depth/length 0.5 mm; SocketPocket depth/length 0.3 mm

XY

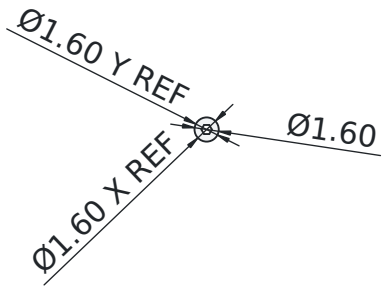


YZ




XZ



ISO



TENDON_r07_M1_ANCHOR_BOLT_COREp75_L2p2_HEAD1p6

steel | HARDWARE

SHEET 061 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE TENDON_r07_M1p4_TERMINAL_GRUB_CORE1p1_Lp95 | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION flat-tip grub, native .6AF socket, unverified thread/strength

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 0.95 mm; SocketPocket depth/length 0.5 mm

XY

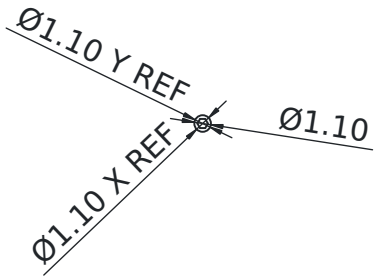


YZ




XZ



ISO



TENDON_r07_M1p4_TERMINAL_GRUB_CORE1p1_Lp95

steel | HARDWARE

SHEET 062 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE TENDON_r07_STEEL_KEYED_CLAMP_R3p3_6p4_T1p4 | orthographic XY / XZ / YZ | dimensions mm

DESIGN_ASSUMPTION native positive cable clamp; thread crests/strength/load qualification unresolved


Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.


Native feature parameters: BlockPad depth/length 1.4 mm; KeyPad depth/length 0.5 mm; AxialHolePocket depth/length 1.9 mm;

CrossTapPocket depth/length 1.25 mm

XY




YZ




XZ



ISO



TENDON_r07_STEEL_KEYED_CLAMP_R3p3_6p4_T1p4

steel | CUSTOM

SHEET 063 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE TENDON_r07_WHEEL_OD13_KEYED_POSITIVE_TERMINALS | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION native positive cable clamp; thread crests/strength/load qualification unresolved

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: WheelPad depth/length 2.4 mm; CableGroove0Pocket depth/length 0.5 mm; CableGroove1Pocket depth/length 0.5 mm; AnchorPocket depth/length 2.4 mm; KeyPocket_1 depth/length 0.5 mm; BoltPocket_1 depth/length 1 mm; BendReliefPocket_1 depth/length 0.8 mm; KeyPocket1 depth/length 0.5 mm; BoltPocket1 depth/length 1 mm; BendReliefPocket1 depth/length 1.1 mm

XY

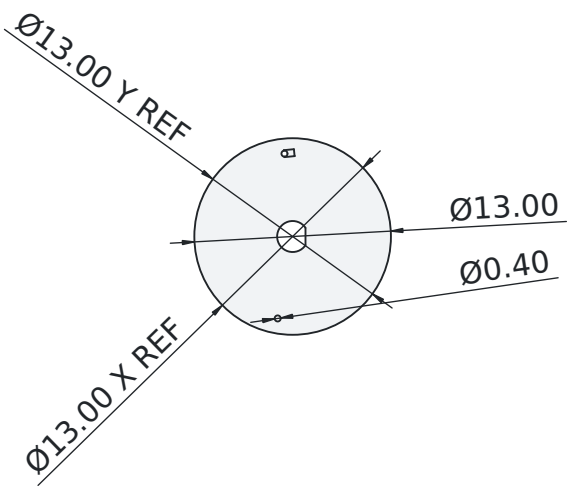



YZ




XZ



ISO



## TENDON_r07_WHEEL_OD13_KEYED_POSITIVE_TERMINALS

PA12 | CUSTOM

SHEET 064 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.


SOURCE TORSO_FORE_TRANSVERSE_FRAME_r06 | orthographic XY / XZ / YZ | dimensions mm

DESIGN_ASSUMPTION Movie-S1 transverse frame; generic slots; supplier pattern/capture/load UNVERIFIED; r07 local O1 clip corne r relief X>=34.65,Z<=-7.4


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: TransverseSlottedPlate depth/length 1.6 mm; EarE0 depth/length 1.6 mm; EarD0 depth/length 1.6 mm; EarE1 depth/length 1.6 mm; EarD1 depth/length 1.6 mm; BottomPanR depth/length 1.2 mm; OuterHPanelR depth/length 1.2 mm; TopStrapR0 depth/length 1.2 mm; TopStrapR1 depth/length 1.2 mm; InnerCaseCaptureR depth/length 1.6 mm; BottomPanL depth/length 1.2 mm; OuterHPanelL depth/length 1.2 mm; TopStrapL0 depth/length 1.2 mm; TopStrapL1 depth/length 1.2 mm;


XY





YZ




XZ



ISO



TORSO_FORE_TRANSVERSE_FRAME_r06

PA12 | CUSTOM

SHEET 065 / 067

SCALE 0.25:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE TORSO_HIND_TRANSVERSE_FRAME_r06 | orthographic XY / XZ / YZ | dimensions mm


DESIGN_ASSUMPTION Movie-S1 transverse frame; generic slots; supplier pattern/capture/load UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.


PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: TransverseSlottedPlate depth/length 1.6 mm; EarE0 depth/length 1.6 mm; EarD0 depth/length 1.6 mm; EarE1 depth/length 1.6 mm; EarD1 depth/length 1.6 mm; BottomPanR depth/length 1.2 mm; OuterHPanelR depth/length 1.2 mm; TopStrapR0 depth/length 1.2 mm; TopStrapR1 depth/length 1.2 mm; InnerCaseCaptureR depth/length 1.6 mm; BottomPanL depth/length 1.2 mm; OuterHPanelL depth/length 1.2 mm; TopStrapL0 depth/length 1.2 mm; TopStrapL1 depth/length 1.2 mm;


XY

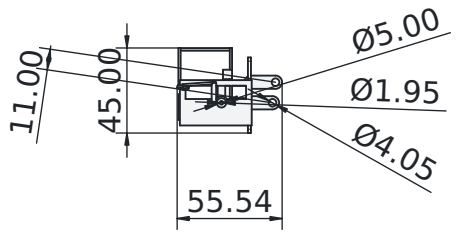



YZ




XZ



ISO



TORSO_HIND_TRANSVERSE_FRAME_r06

PA12 | CUSTOM

SHEET 066 / 067

SCALE 0.25:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.

SOURCE TORSO_OUTPUT_JOURNAL_D1p9_L25p8 | orthographic XY / XZ / YZ | dimensions mm


turned 1.9mm journal; 1.7mm groove roots; provisional spring clip fit; inspect fatigue root

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 25.8 mm; GroovePocket0 depth/length 0.6 mm; GroovePocket1 depth/length 0.6 mm

XY

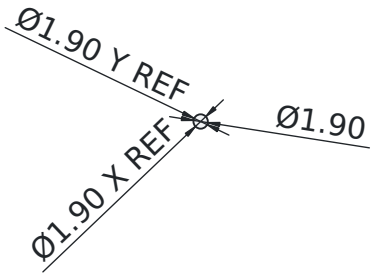


YZ




XZ



ISO



TORSO_OUTPUT_JOURNAL_D1p9_L25p8_GROOVED

steel | HARDWARE

SHEET 067 / 067

SCALE 1.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.