SOURCE TENDON_r07_WHEEL_OD13_KEYED_POSITIVE_TERMINALS | orthographic XY / XZ / YZ | dimensions mm

DESIGN_ASSUMPTION native positive cable clamp; thread crests/strength/load qualification unresolved

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: WheelPad depth/length 2.4 mm; CableGroove0Pocket depth/length 0.5 mm; CableGroove1Pocket depth/length 0.5 mm; AnchorPocket depth/length 2.4 mm; KeyPocket_1 depth/length 0.5 mm; BoltPocket_1 depth/length 1 mm; BendReliefPocket_1 depth/length 0.8 mm; KeyPocket1 depth/length 0.5 mm; BoltPocket1 depth/length 1 mm; BendReliefPocket1 depth/length 1.1 mm

XY

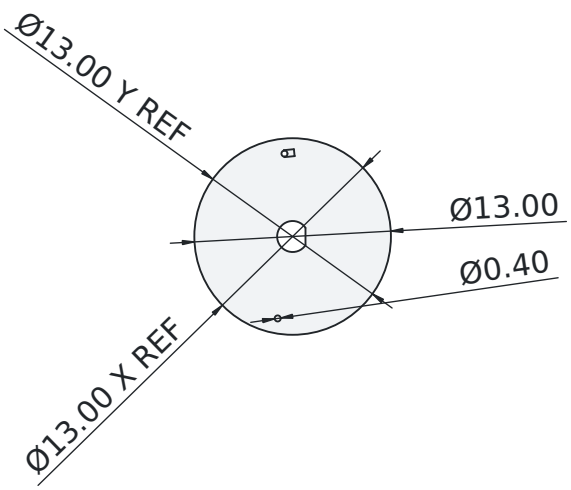

YZ



XZ

ISO



TENDON_r07_WHEEL_OD13_KEYED_POSITIVE_TERMINALS

PA12 | CUSTOM

SHEET 064 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.