SOURCE DIRECT_CRANK_FLUSH_M2_L | orthographic XY / XZ / YZ | dimensions mm

metal crank; 1.9 mm fixed G bore; flush counterbores leave 0.4 mm floor; strength UNVERIFIED

Critical fits UNKNOWN. Finish and inspect bores; no tolerance or fit release.

PROVISIONAL. REF extents: regenerate drawing after model edits. Critical fits UNKNOWN.

Native feature parameters: Pad depth/length 1.2 mm; CrankThroughBoresL depth/length 1.2 mm; CrankFlushCounterboresL depth/length 0.8 mm

XY

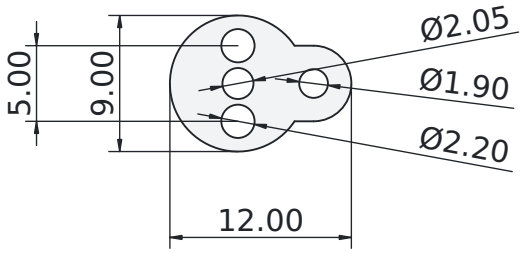

YZ

XZ

ISO



DIRECT_CRANK_FLUSH_M2_L

steel | CUSTOM

SHEET 001 / 067

SCALE 2.0:1

FLEXOR reconstructed candidate | r07 | mm | PROVISIONAL - NOT RELEASED FOR FABRICATION

Dimensions mm. DESIGN_ASSUMPTION. Critical fits UNKNOWN. Validate interfaces and loads. Do not scale.