

D

C

B

A

6





5

4

3

2

1

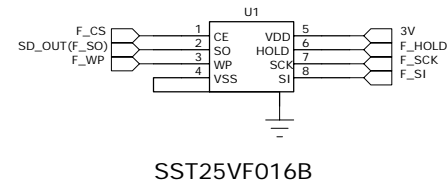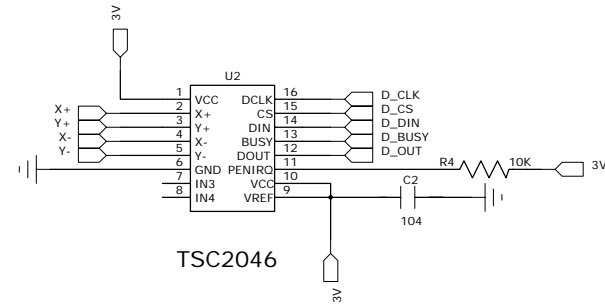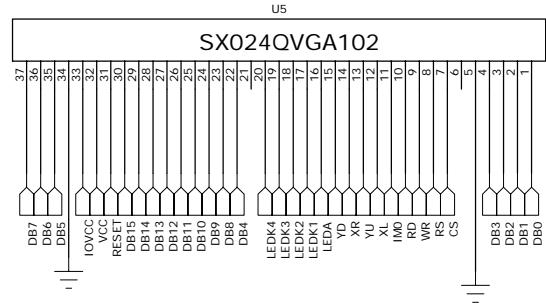

VCC=2.8V, IOVCC=1.8V/2.8V  
DRIVE IC: ILI9341  
背光驱动电流60mA(背光驱动电压3.0V~3.4V)  
LEDA,LEDK为背光驱动脚

IM0	Interface	Used pin
0	MCU 16 bits	DB15-DB0
1	MCU 8 bits	DB15-DB8

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

D

C

B

A

DRAWN: <Drawn By>	DATED: <Drawn Date>	COMPANY: 深圳市老友记电子有限公司			
CHECKED: <Checked By>	DATED: <Checked Date>	TITLE: SX024QVGA102-SCH_V1.0			
QUALITY CONTROL: <QC By>	DATED: <QC Date>	CODE: <Code>	SIZE: B	DRAWING NO: <Drawing Number>	REV: <Revision>
RELEASED: <Released By>	DATED: <Release Date>	SCALE: <Scale>			SHEET: 1 of 1