

Shock-Boundary Layer Interactions in Supersonic Turbine Cascades

Hugo F. S. Lui, Tullio R. Ricciardi, and William R. Wolf*

University of Campinas, Campinas, São Paulo, Brazil

James Braun, Iman Rahbari, and Guillermo Paniagua

Purdue University, West Lafayette, Indiana, USA

(Dated: April 19, 2022)

Abstract

The physics of shock-boundary layer interactions in a supersonic turbine cascade is investigated through a wall-resolved large eddy simulation. Special attention is given to the characterization of the low-frequency dynamics of the separation bubbles using flow visualization, spectral analysis, space-time cross correlations, and flow modal decomposition. The mean flowfield shows different shock structures formed on both sides of the airfoil. On the suction side, an oblique shock impinges on the turbulent boundary layer, whereas a Mach reflection interacts with the pressure side boundary layer. Instantaneous flow visualizations illustrate elongated streamwise structures on the incoming boundary layers and their interactions with the shocks and separation bubbles. The passage of high-speed (low-speed) streaks through the recirculation bubbles leads to the downstream (upstream) motion of the separation point on both suction and pressure sides, resulting in spanwise modulation of the bubbles. Space-time cross-correlations reveal that the near-wall streaks drive the suction side separation bubble motion, which in turn promotes the oscillations of the reattachment shock and shear layer flapping. Space-time correlations also indicate the existence of a π phase jump in the pressure fluctuations along the separation bubble on the suction side. After this phase jump, a downstream propagating pressure disturbance is observed, while prior to this point, the pressure disturbances dominantly propagate in the upstream direction. Finally, the organized motions in the shock-boundary layer interactions and their corresponding characteristic frequencies are identified using proper orthogonal decomposition.

I. INTRODUCTION

Supersonic fluid machinery offers size and cost reduction in high-speed propulsion and power generation systems [1, 2] and for compact hydrocarbon cracking [3]. The detailed analysis of supersonic turbines is challenging predominantly due to the shock-boundary layer interactions (SBLIs) which arise when the detached oblique shock waves forming at the stator/rotor leading edges impinge on the boundary layers of the neighboring airfoils. The shocks impose intense adverse pressure gradients on the boundary layers that may cause flow separation. This, in turn, leads to the formation of separation and reattachment shocks that

* wolf@fem.unicamp.br

interact with the turbulent boundary layers, resulting in strong pressure fluctuations and intense thermal loading which can compromise the turbine structural integrity. Moreover, the total pressure losses from the SBLIs also reduce the system overall efficiency [4–9].

When the boundary layer separates in a SBLI, a shear layer is developed to ensure a continuous variation of the flow at the recirculation region. Eventually, a Kelvin-Helmholtz (K-H) instability arises leading to high turbulence levels due to the formation of energetic coherent structures. A strong mixing also takes place where an energy transfer occurs from the external mean flow towards the separation region, leading to the flow reattachment [5]. Typically, the separated flow has a “low-frequency dynamics” related to the oscillations of the separation bubble, motion of the separation shock, flapping of the shear layer, the K-H instabilities, and motion of the reattachment shock. On the other hand, the incoming turbulent boundary layer excites a broad range of frequencies and combinations of all these features results in a broadband frequency spectrum superposed by low-frequency tonal peaks [10, 11].

Several authors have studied the low-frequency events taking place in SBLIs using experimental [11–16] and numerical [17–29] techniques. Based on previous investigations, one can categorize the main flow phenomena in three different frequency bands: low frequency oscillations from the reflected shock motion and large-scale bubble breathing ($0.02 < St < 0.05$), low to mid-frequency motions of the separation bubble and flapping of the shear layer ($St \approx 0.1$), and the K-H instabilities ($0.3 < St < 0.5$). Here, the Strouhal number $St = fL_{SB}/U_\infty$ is defined based on the length of the separation bubble L_{SB} and the inlet velocity U_∞ . The sources of low-frequency dynamics have been the subject of debate because their driving mechanisms have not been fully characterized [10].

Several studies have shown that the upstream boundary layer fluctuations are responsible for the low-frequency unsteadiness. In this context, Beresh *et al.* [30] experimentally investigated the relationship between upstream boundary layer properties and the separation shock foot motion in a Mach 5 compression ramp by using particle image velocimetry (PIV) and wall pressure measurements. They observed that the downstream shock motion is associated with positive velocity fluctuations in the incoming boundary layer while the upstream shock motion is related with negative velocity fluctuations. Ganapathisubramani *et al.* [13] conducted PIV measurements to study the low-frequency dynamics of a Mach 2 SBLI in a compression ramp. Their measurements indicated the presence of low- and high-

speed superstructures in the upstream turbulent boundary layer. These authors reported that the passage of high-speed (low-speed) structures through the separated flow leads to downstream (upstream) motion of the separation line.

Porter and Poggie [31] performed high-fidelity simulations of the flow over a Mach 2 compression ramp to investigate the influence of boundary layer disturbances on the low-frequency unsteadiness. Their statistical analysis revealed that the separation bubble responds selectively to specific large-scale, near-wall perturbations in the incoming boundary layer. They also suggested that the external forcing by the upstream turbulent boundary layer drives a weakened global mode of the separation region. More recently, Baidya *et al.* [32] studied a Mach 2 shock-boundary layer interaction using PIV. These authors reported that the passage of large-scale low (high) momentum structures through the interaction region causes the expansion (contraction) of the separation bubble which, in turn, leads to the reflected shock oscillations.

While the previous authors indicated that upstream mechanisms may be the cause of the reflected shock and bubble motions, some studies have associated the low-frequency unsteadiness in SBLIs with the downstream mechanisms. For example, Pirozzoli and Grasso [17] performed direct numerical simulations (DNS) to investigate a Mach 2.25 shock impinging on a turbulent boundary layer. They reported that the interaction of shear layer vortical structures with the incident shock generates acoustic disturbances that propagate upstream inside the subsonic region of the boundary layer. The authors concluded that such effect leads to motion of the separation bubble and the subsequent reflected shock oscillation. Touber and Sandham [19] carried out a large eddy simulation (LES) of a Mach 2.3 oblique shock impinging on a flat plate. The authors performed a linear stability analysis and found an unstable global mode inside the bubble that can increase or decrease the separation region depending on the sign of the amplitude function. They also computed wall pressure space-time correlations and detected low-frequency waves in the initial portion of the bubble which propagate upstream. These authors suggest that this is an effect of the global mode on the separation bubble.

Priebe and Martín [20] performed a DNS to study a Mach 2.9 flow over a compression ramp. Their statistical analysis indicated that the shock motion is related to breathing of the separation bubble and flapping of the shear layer. They also observed a low-frequency mode that may be related to the output response of the SBLI system, and this could be

linked to a global instability in the separated flow. Adler and Gaitonde [25] investigated the linear response to small perturbations in a Mach 2.3 shock-flate plate impingement. Their results showed that the SBLI promotes a global linear instability which is sustained through constructive feedback of perturbations inside the separation region. The self-sustaining perturbations have a significant influence on the shock motion and the bubble breathing.

In this work, a LES is performed to investigate the physics of SBLIs in supersonic turbine cascades. In sections II and III, the numerical methods and flow and mesh configurations are described. Results are then presented in section IV. Particular emphasis is placed on characterizing the low-frequency unsteadiness related to the separation bubbles, the shock motions and the flapping of the shear layers. First, the mean flow is analyzed in section IV A, followed by a characterization of the spatial and temporal variations of the separation bubbles due to the passage of near-wall streaks from the upstream boundary layer, in section IV B. Next, spectral and statistical analyses are performed in section IV C to categorize the relevant frequencies involved in the flow, as well as to investigate the influence of upstream or downstream disturbances on the flow features appearing in the SBLIs. Finally, the filtered (spectral) proper orthogonal decomposition (POD) is used in section IV D to identify the organized low-frequency motions in the flow. The present study provides insights on the SBLIs in a stator cascade, a configuration that is more complex than the canonical compression ramp and the frequently-investigated oblique shock-boundary layer interaction on a flat plate. Understanding the physics of SBLI phenomena for the present configuration is essential to develop efficient supersonic fluid-machinery, including the development of effective cooling strategies and active flow control for multi-point operation.

II. NUMERICAL METHODOLOGY

A. Governing Equations

A large eddy simulation is employed to solve the compressible Navier-Stokes equations in a curvilinear system with coordinates ξ^i , $i = 1, 2, 3$, written in terms of the contravariant velocity components u^i as

$$\frac{\partial}{\partial t} (\sqrt{g}\rho) + \frac{\partial}{\partial \xi^i} (\sqrt{g}\rho u^i) = 0 , \quad (1)$$

$$\frac{\partial}{\partial t} (\sqrt{g} \rho u^i) + \frac{\partial}{\partial \xi^j} [\sqrt{g} (\rho u^i u^j + g^{ij} p - \tau^{ij})] + \Gamma_{kj}^i \sqrt{g} (\rho u^k u^j + g^{kj} p - \tau^{kj}) = f_b^i , \quad (2)$$

and

$$\frac{\partial}{\partial t} (\sqrt{g} E) + \frac{\partial}{\partial \xi^i} \left\{ \sqrt{g} [(E + p) u^i - \tau^{ij} g_{jk} u^k + q_i] \right\} = g_{ij} u^i f_b^j . \quad (3)$$

The above set of equations represents the continuity, momentum and energy equations. The total energy E , the viscous stress tensor τ_{ij} and the heat flux q_i for a fluid obeying Fourier's law are given, respectively, by

$$E = \frac{p}{\gamma - 1} + \frac{1}{2} \rho g_{ij} u^i u^j , \quad (4)$$

$$\tau^{ij} = \frac{\mu}{Re_a} \left[g^{ik} \left(\frac{\partial u^j}{\partial \xi^k} + u^l \Gamma_{lk}^j \right) + g^{jk} \left(\frac{\partial u^i}{\partial \xi^k} + u^m \Gamma_{mk}^i \right) \right] + \left(\beta^* - \frac{2}{3} \frac{\mu}{Re_a} \right) \left[g^{ij} \left(\frac{\partial u^k}{\partial \xi^k} + u^l \Gamma_{kl}^k \right) \right] , \quad (5)$$

and

$$q_i = - \left(\frac{\mu}{Re_a Pr} + \kappa^* \right) g^{ij} \frac{\partial T}{\partial \xi^j} . \quad (6)$$

Assuming the gas to be calorically perfect, the set of equations is closed by the equation of state

$$p = \frac{(\gamma - 1)}{\gamma} \rho T . \quad (7)$$

In the equations above, t represents the time, ρ is the density, p is the pressure, μ is the dynamic viscosity coefficient, T is the static temperature, and γ is the ratio of specific heats. The equations are solved in non-dimensional form where the length, velocity components, density, pressure, temperature and time are nondimensionalized by the axial airfoil chord c_x , inlet speed of sound a_∞ , inlet density ρ_∞ , $\rho_\infty a_\infty^2$, $(\gamma - 1) T_\infty$ and c_x/a_∞ , respectively. Here, Re_a is the Reynolds number based on the speed of sound, defined as $Re_a = Re/M_\infty$, where the Reynolds and Mach numbers are calculated as $Re = \rho_\infty U_\infty c_x / \mu_\infty$ and $M_\infty = U_\infty / a_\infty$, respectively. The terms U_∞ , T_∞ and μ_∞ represent the flow velocity, temperature and dynamic viscosity coefficient computed at the cascade inlet.

The Prandtl number is given by $Pr = \mu_\infty c_p / \kappa_\infty$, where c_p is the specific heat at constant pressure and κ_∞ is the inlet thermal conductivity. The viscosity is computed using the nondimensional Sutherland's law, written as

$$\mu = [(\gamma_\infty - 1) T]^{\frac{3}{2}} \frac{1 + \frac{S_\mu}{T_\infty}}{T(\gamma_\infty - 1) + \frac{S_\mu}{T_\infty}} , \quad (8)$$

where S_μ is Sutherland's constant. The parameters β^* and κ^* are the artificial bulk viscosity and thermal conductivity, computed using a shock capturing scheme. The term f_b^i is the contravariant body force component employed for boundary layer tripping. In the governing equations, g_{ij} and g^{ij} are the covariant and contravariant metric tensors, respectively, \sqrt{g} is the Jacobian of the covariant metric tensor, and Γ_{jk}^i represents the Christoffel symbols of the second kind. Further details about the present formulation can be found in Refs. [33, 34].

B. Numerical Schemes

The spatial discretization of the governing equations is performed using a sixth-order accurate compact scheme [35] implemented on a staggered grid. A sixth-order compact interpolation method is also used to obtain fluid properties on the staggered nodes. The sixth-order compact filter presented by Lele [36] is applied in flow regions far away from solid boundaries at each time step in order to control numerical instabilities which may arise from mesh non-uniformities and interpolations between overlapping grids. An explicit sub-grid scale model is not applied, however, the transfer function associated with compact filters has been shown to provide an approximation to sub-grid scale models [37].

Two grids are employed in the present simulations: one is a body-fitted O-grid block which surrounds the vane and the other is a Cartesian block employed to enforce the pitchwise periodicity. In the O-grid, the time integration of the equations is carried out by the implicit second-order scheme of Beam and Warming [38] to reduce the stiffness problem typical of boundary layer grids. In the background Cartesian block, a third-order Runge-Kutta scheme is used for time advancement of the Navier-Stokes equations. A fourth-order Hermite interpolation scheme [34, 39] is used to exchange information between grid blocks in the overlapping zones. The simulation time step is determined based on a variable time step algorithm [40] considering the inviscid Courant–Friedrichs–Lewy (CFL) condition and the time scales associated with μ , β and κ . Further details about the numerical procedure can be found in [34, 35].

Shock capturing schemes are required to introduce a minimal, yet sufficient, numerical dissipation in the vicinity of shock waves without damping the small scales of turbulence. In this work, the localized artificial diffusivity (LAD) [40] is used to compute the artificial fluid properties, which are added to their physical transport counterparts in Eqs. (5) and

(6). The specific implementation employed is the method LAD-D2-0 proposed by Kawai *et al.* [41] with no artificial shear viscosity.

In order to promote the transition to turbulence on the airfoil boundary layers, an artificial body force has been included in the momentum and energy equations (see the RHS of Eqs. 2 and 3) as described by Sansica [42], where a time-periodic unsteady actuation and random spanwise treatment are assumed. The body-force tripping is applied at $0.22 < x < 0.27$ on the suction side, and at $0.10 < x < 0.15$ on the pressure side. The tripping is applied along the wall-normal region up to a distance of $0.001c_x$. The magnitude of the forcing is chosen experimentally to guarantee a bypass transition.

C. Proper Orthogonal Decomposition

Identification and analysis of the organized motions related to the separation bubbles, shock waves and shear layers are of utmost importance to understand their overall role in the complex SBLIs. Modal decomposition techniques have emerged as powerful tools for analyzing the unsteady flows [43] facilitating the assessment of organized structures which may play an important role in the flow dynamics. In recent years, these techniques have been applied for the investigation of low-frequency unsteadiness in SBLIs [28, 44–52].

Coherent flow structures can be defined in terms of fluctuation quantities, such that a Reynolds decomposition is employed to split the instantaneous flow field $\mathbf{Q}(\mathbf{x}, t)$ into an averaged time-independent component $\bar{\mathbf{Q}}(\mathbf{x})$ and its fluctuation field $\mathbf{Q}'(\mathbf{x}, t)$. Among the various modal decomposition techniques, the proper orthogonal decomposition is a data-driven method used to extract organized motion [53] based on data correlation by seeking the best L_2 -norm representation of the fluctuation flowfield. It requires the calculation of the covariance matrix \mathbf{C} , defined as

$$\mathbf{C} = \mathbf{Q}'^T \mathbf{W} \mathbf{Q}' , \quad (9)$$

where the matrix \mathbf{W} contains the integration weights based on the spatial discretization. The singular value decomposition (SVD) is used to decompose the matrix \mathbf{C} , which results in orthonormal empirical functions $\phi_i(\mathbf{x})$ and $\mathbf{a}_i(t)$, respectively the spatial and temporal POD modes, with an amplitude scaling factor given by the singular values σ_i . In this decomposition, the maximum number of modes M is equal to the rank of \mathbf{Q}' which, for

the present high-fidelity simulation, is given by the number of time samples (snapshots). A linear superposition of the modes can be performed without loss of information according to

$$\mathbf{Q}'(\mathbf{x}, t) = \sum_{i=1}^M \mathbf{a}_i(t) \boldsymbol{\sigma}_i \boldsymbol{\phi}_i(\mathbf{x}). \quad (10)$$

The POD modes are ranked solely based on their energetic content and a single mode may contain a broad range of frequencies. Since the dominant flow features in SBLIs have distinct tonal peaks [10, 25], the filtered/spectral POD technique [54, 55] is employed to remove broadband content while still retaining the spectral information around a central frequency. This method allows for a continuous shifting from the energetically optimal POD to the standard Fourier decomposition. This is achieved by a convolution of the covariance matrix C with a filter function g as

$$\tilde{\mathbf{C}}(t) = \mathbf{C}(t) * g(\tau), \quad (11)$$

and the SVD is applied to the filtered matrix $\tilde{\mathbf{C}}$.

This approach is beneficial since the energy-ranking property of the POD is still retained. Also, it benefits from a more organized temporal dynamics since the filtering operation ultimately works as a band-pass filter of the temporal modes. This is important since turbulent flows are composed of multiple frequencies and chaotic dynamics, which may impact the coherent structures and lead to intermittent events or flow modulation. With the filtered POD, it is possible to analyze specific frequency bands rather than a single frequency content, as is the case of the Fourier transform. One important remark of this methodology is that the temporal modes depend on the filter transfer function, including its width and shape such that the filter parameters are case-dependent [56].

III. FLOW AND MESH CONFIGURATIONS

This section presents details of the flow configuration investigated and describes the computational grids employed in the LES calculations. Figure 1 (a) shows the flow conditions and geometrical parameters. The inlet Mach number is $M_\infty = 2.0$ and the Reynolds number based on the inlet velocity and axial airfoil chord is $Re = 395,000$. The fluid is assumed to be a calorically perfect gas, where the ratio of specific heats is $\gamma = 1.31$, the Prandlt number is $Pr = 0.747$ and the ratio of the Sutherland constant over inlet temperature is 0.07182. The

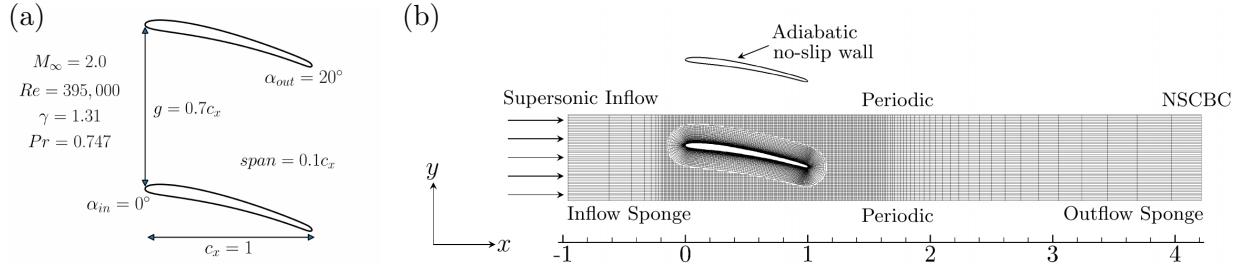


Figure 1. Schematics of (a) flow configuration and geometrical parameters, and (b) computational domain skipping every 5 grid points.

turbine geometry is designed to ensure the starting process of the passage at the specified inlet Mach Number and flow turning [1]. More details about the stator geometry and the inlet flow conditions can be found in [57]. This flow configuration was also studied in [58], where a comparison between the present LES and Reynolds-averaged Navier-Stokes (RANS) solutions presented good agreement in terms of the mean flow quantities, especially on the suction side.

Figure 1 (b) shows a schematic of the overset grid employed in the LES along with the employed boundary conditions. The body-fitted O-grid block has $1280 \times 300 \times 144$ points in the streamwise, wall-normal and spanwise directions, respectively. The O-grid is embedded in a background Cartesian grid block of size $960 \times 280 \times 72$. Overall, the computational grid is composed of approximately 75×10^6 points. No-slip adiabatic boundary conditions are applied along the vane surface. A supersonic inflow boundary condition is employed, while the Navier-Stokes characteristic boundary conditions (NSCBC) [59] are applied at the outflow. A damping sponge is also applied near the inflow and outflow boundaries to minimize reflection of numerical disturbances [35, 60]. Periodic boundary conditions are used in the y -direction of the background grid to simulate a linear cascade of vanes. Periodic boundary conditions are also applied in the spanwise direction to avoid the modeling complexities near the tip and end-wall in the present analysis.

The standard recommendations in terms of grid resolution [61] are followed in the present wall-resolved LES. The near-wall resolution is kept in the range given by $10 < \Delta s^+ < 40$, $0.2 < \Delta n^+ < 0.4$, and $5 < \Delta z^+ < 12$, where s , n and z represent the tangential, wall-normal and spanwise flow coordinates. These numbers are computed for regions where the boundary layers are fully developed and in equilibrium, away from the tripping and separation regions.

The spanwise extent of the computational domain is equivalent to 14 incoming boundary layer thickness δ_0 on the suction side. Therefore, the present grid resolution is similar or higher than those employed by other high-fidelity simulations of SBLIs [19, 28, 47, 62]. The same holds valid for the adequacy of the span length of the domain.

In the calculation, the variable time step is computed based on an inviscid CFL parameter of 1.2, giving a time step corresponding to $\approx 2.6 \times 10^{-5}$ based on the inlet velocity. After the initial transient period, the simulation is run for approximately 26 nondimensional time units and it covers around 12 cycles of the low-frequency motion ($St = 0.045$). The 3D flow data and the spanwise-averaged flowfields are recorded every 0.006 and 0.0012 time units, respectively, for the calculation of statistics.

IV. RESULTS

In this section, the physical mechanisms taking place on the suction and pressure sides of the airfoil are investigated using flow visualization and statistical analysis which allow for a comparison between the different features of the SBLIs.

A. Visualization of instantaneous and mean flows

A snapshot of the flow is shown in Figs. 2(a)–(d) displaying the iso-surfaces of Q -criterion colored by the u -velocity component together with a background view of magnitude of density gradient $|\nabla\rho|$. In Fig. 2(a), we can observe the oblique shock waves that are generated at the airfoils' leading edges, and their interaction with the turbulent boundary layers of the neighboring vanes. Oblique shocks are also displayed at the trailing edges. A detailed view of the flowfield is presented in Fig. 2(b), where one can observe the separation bubbles (blue color contours) induced by the SBLIs, as well as different shock structures formed on both sides of the airfoil.

On the suction side, an oblique shock impinges on the turbulent boundary layer and leads to the formation of compression waves near the reattachment location, which coalesce into an intermittent reattachment shock. On the other hand, on the pressure side a more pronounced reflected shock structure is generated due to a Mach reflection. This latter condition occurs when a regular reflected shock is unable to turn the flow to be tangent to the wall, i.e., the

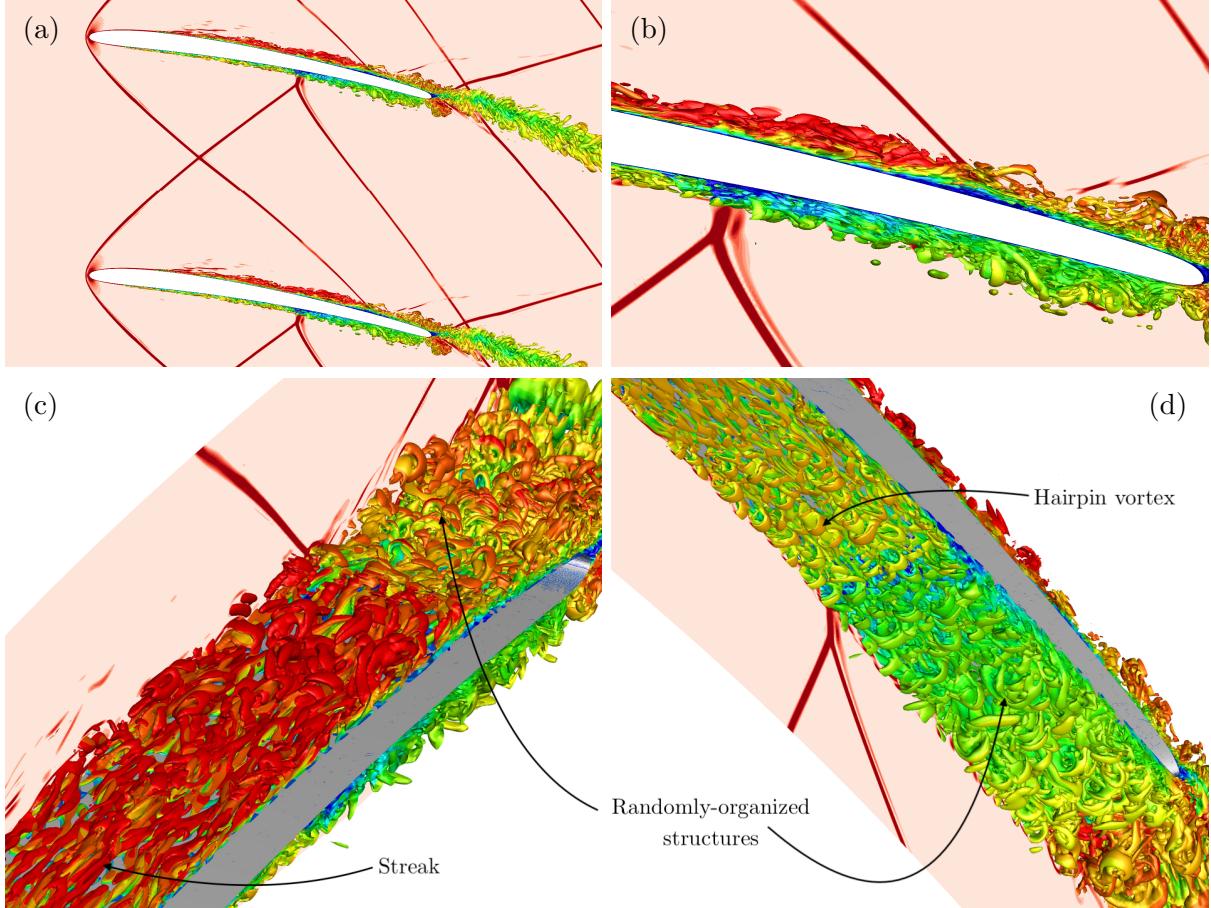


Figure 2. Iso-surfaces of Q -criterion colored by u -velocity component with red contours, in the background, revealing the shock wave structure by displaying the magnitude of density gradient $|\nabla \rho|$: (a) view of linear cascade, (b) detail view of the SBLIs, (c) view of suction side boundary layer, (d) view of pressure side boundary layer.

maximum flow turning angle at the given Mach number downstream of the incident shock is smaller than the wall angle. In this case, a normal shock is generated to ensure that the flow is tangent to the wall surface [63, 64]. In Figs. 2(c) and 2(d), one can see the vortical structures on the suction and pressure side boundary layers, respectively. Figure 2(c) reveals the presence of streaks in the region further upstream of the SBLI, while downstream of the shock, the formation of randomly-organized structures is observed similar to Ref. [65]. On the pressure side, Fig. 2(d) shows that the hairpin vortices appear along the boundary layer upstream of the SBLI, whereas downstream of the shock, the vortical structures are similar to those presented on the suction side. A movie displaying the time evolution of the flowfield, including the flow features described above, is provided as supplemental material

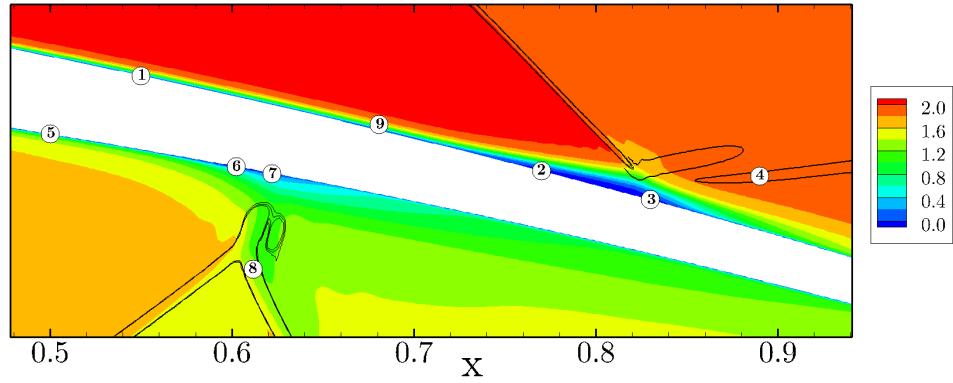


Figure 3. Spanwise averaged contour of time-averaged u -velocity. The black lines display the shock waves visualized by pressure gradient magnitude and white circles indicate the probe locations used for calculation of the flow statistics.

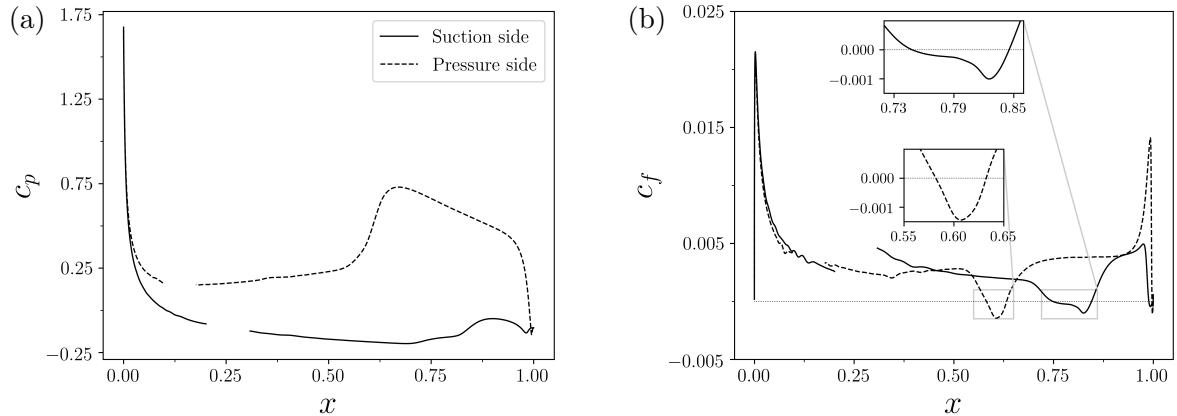


Figure 4. Spanwise and time averaged (a) pressure coefficient and (b) skin-friction coefficient distributions. The insets show the regions with separated boundary layers.

(movie 1).

The spanwise-averaged mean (time-averaged) u -velocity contour is presented in Fig. 3. In this plot, nine points are clearly labeled that serve as the probe locations for computations of flow statistics. The suction side separation bubble is observed between markers 2 and 3 while the pressure side bubble is smaller, and falls between markers 6 and 7. The shock waves are displayed in terms of pressure gradient and appear as black lines in the figure.

The distribution of the spanwise and time averaged pressure coefficient $c_p = \frac{p-p_\infty}{0.5\rho_\infty U_\infty^2}$ along the airfoil chord is shown in Fig. 4(a). The regions where the boundary layer tripping

is applied are removed from the plot. One can notice a smoother pressure rise on the suction side while a steeper rise, due to the normal shock, is observed on the pressure side. Figure 4(b) presents the spanwise and time averaged skin-friction coefficient distribution $c_f = \frac{\tau_w}{0.5\rho_\infty U_\infty^2}$, where τ_w represents the wall shear stress. Again, the regions where the boundary layer tripping is applied are removed from the figure and a horizontal dashed line delimits the $c_f = 0$ value. The friction coefficient distribution highlights the presence of separation bubbles on both sides of the airfoil, characterized by locations where $c_f < 0$. On the suction side, the mean separation bubble length $\langle L_{SB} \rangle \approx 0.10c_x$ is formed between $0.75 < x < 0.85$ while, for the pressure side, the mean bubble size is $\langle L_{SB} \rangle \approx 0.05c_x$, being formed between $0.58 < x < 0.63$.

B. Spatio-temporal analysis of the separation bubbles

Figure 5 shows the spatial variations of the suction side separation bubble for two time instants. The left-hand plots represent a moment when the overall bubble size is small, while the right-hand plots correspond to an instant when the separation bubble is large. Figures 5(a) and 5(b) display the iso-surfaces of instantaneous $u = 0$ velocity (blue color) which delimit the regions of flow recirculation. Isosurfaces of positive u velocity fluctuations are also shown (red color) to highlight the organized flow structures that interact with the bubble. We can observe the existence of elongated streamwise structures in the upstream boundary layer, some of which penetrate the bubble causing the flow to locally reattach at its leading edge, as highlighted in Fig. 5(a). Some structures, on the other hand, are advected over the bubble, bursting downstream and causing reattachment at its trailing edge. A movie showing the unsteady three-dimensional behavior of the suction side separation bubble is provided as supplemental material (movie 2).

To better visualize the spatial variations of the separation bubble, the instantaneous skin-friction coefficient is presented along the x - z plane in Figs. 5(c) and 5(d). In these figures, the white zones display the separated flow region. It can be observed that the bubble has undulations along the spanwise direction and may have internal spots with positive c_f , indicating that local reattachment occurs in these regions. The figures also indicate that some boundary layer streaks imprint a signature on the wall, upstream of the bubble. Downstream of the reattachment, the wall friction fluctuations are more pronounced due

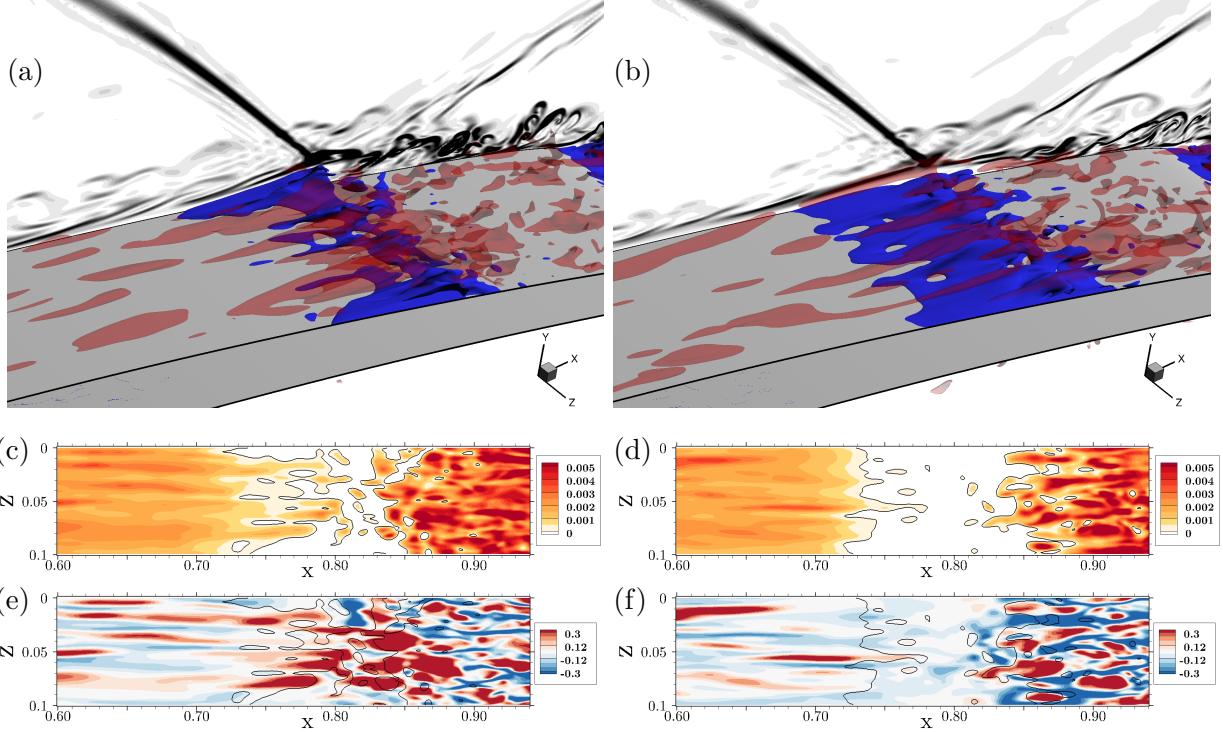


Figure 5. Spatial variation of the suction side separation bubble at different time instants with (a,b) iso-surfaces of instantaneous $u = 0$ velocity (blue color) with velocity fluctuations $u' = 0.3$ (red color). The shocks are displayed in the background by grayscale contours of $|\nabla \rho|$. Planes of (c,d) skin-friction coefficient and (e,f) tangential velocity fluctuations at $y^+ \approx 6$. The black lines display the $c_f = 0$ contour level.

to streak bursting which occurs in the SBLI. Figures 5(e) and 5(f) exhibit the tangential velocity fluctuations computed in the x - z plane near the wall, at $y^+ \approx 6$. This location in terms of wall units is computed based on mean flow properties from the attached boundary layer, upstream of the bubble. One can observe that the passage of high-speed (low-speed) streaks near the recirculation region leads to downstream (upstream) motion of the separation point. These findings are consistent with previous studies from Refs. [13, 30–32]. A movie displaying the temporal variation of the suction side separation bubble in terms of instantaneous friction coefficient, as well as the response of the bubble to the passage of low and high-speed streaks near the wall is provided as supplemental material (movie 3).

Figure 6 presents the spatial distribution of the pressure side separation bubble at two time instants. The left-hand figures correspond to the instant when the bubble is large, while the right-hand plots are associated with an instance with a small separation bubble. Similar

to the observations made for the suction side, the streamwise structures in the incoming boundary layer may penetrate the bubble, locally reattaching the flow, as seen in Figs. 6(a) and 6(b). A movie showing the unsteady three-dimensional behavior of the pressure side bubble is provided as supplemental material (movie 4). The skin-friction coefficient computed on the x - z plane is displayed in Figs. 6(c-d) and, once again, these plots show the modulated spanwise variation of the separation bubble with internal spots of positive c_f . On the pressure side, the streak signatures of the positive c_f values have similar levels upstream and downstream of the bubble, contrary to the observations made on the suction side. In this case, the bubble is thinner and the streaks transported over its surface do not interact with the normal shock. Figures 6(e) and 6(f) display the tangential velocity fluctuations near the wall at $y^+ \approx 5$. It can be seen that the separation region conforms to the presence of negative velocity fluctuations, while reattached regions have positive velocity fluctuations. A movie showing the temporal variation of the pressure side separation bubble in terms of instantaneous friction coefficient and near-wall velocity fluctuations is provided as supplemental material (movie 5).

Although the present results indicate a three-dimensional behavior of the separation bubbles, other studies [20, 51] show that their low-frequency dynamics are essentially two-dimensional, justifying the investigation of spanwise averaged results. In this context, Fig. 7 presents a comparison between the wall pressure power spectral density (PSD) obtained using two different approaches: in the first, the PSD is computed using spanwise averaged pressure fluctuations, as if the simulations were effectively 2D. In the second, the PSD is computed in a 3D fashion separately for all the points in the spanwise direction and then averaging the results over all these points. In both cases, the PSDs are calculated using Welch's method, where the signal is divided into 3 bins with 66% overlap using a Hanning window function. In Figs. 7(a) and 7(b), the results are presented for probe 3 and 6 from Fig. 3, which are located at the suction and pressure side separation bubbles, respectively. As it can be seen from the plots, the peaks associated with the low-frequency unsteadiness, ranging from $St = 0.04$ to 0.12 , are captured by both 2D and 3D approaches. This result confirms that the low-frequency dynamics is essentially two-dimensional in the present flow configuration. Therefore, in the following analyses, the spanwise averaged data will be used to investigate the low-frequency events taking place in the SBLIs.

Further analysis of the suction side separation bubble is presented in Figure 8 by in-

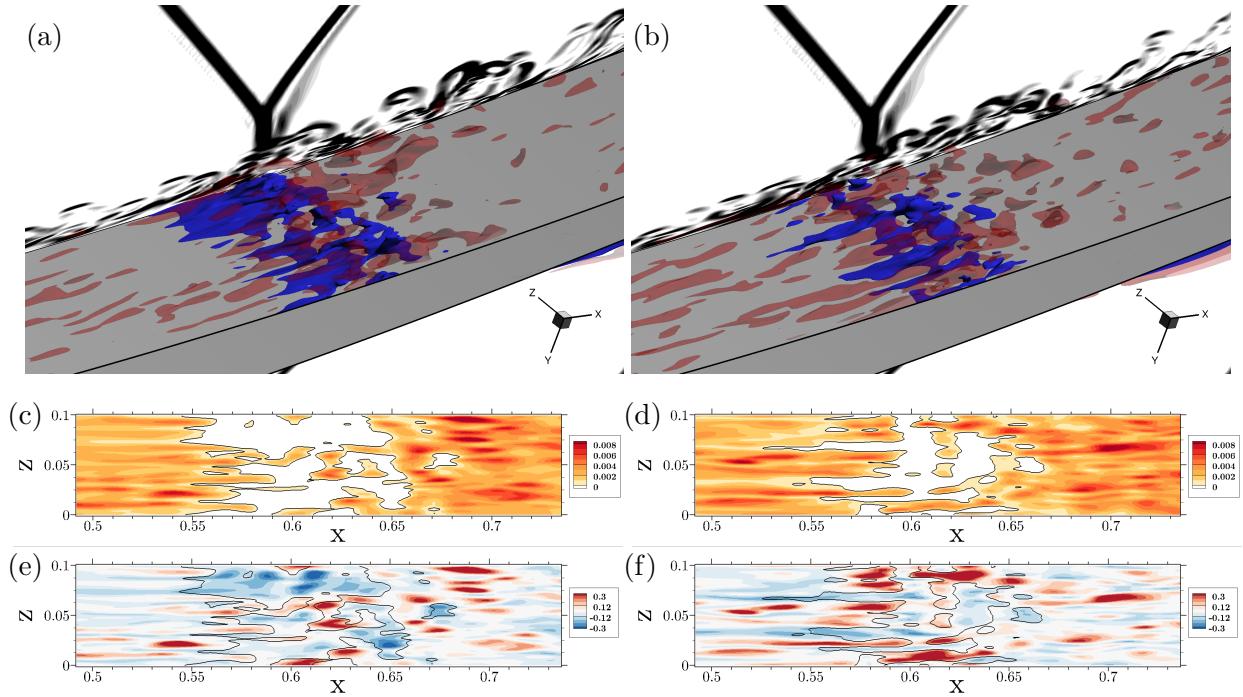


Figure 6. Spatial variation of the pressure side separation bubble at different time instants with (a,b) iso-surfaces of instantaneous $u = 0$ velocity (blue color) with velocity fluctuations $u' = 0.3$ (red color). The shocks are displayed in the background by grayscale contours of $|\nabla\rho|$. Planes of (c,d) skin-friction coefficient and (e,f) tangential velocity fluctuations at $y^+ \approx 5$. The black lines display the $c_f = 0$ contour level.

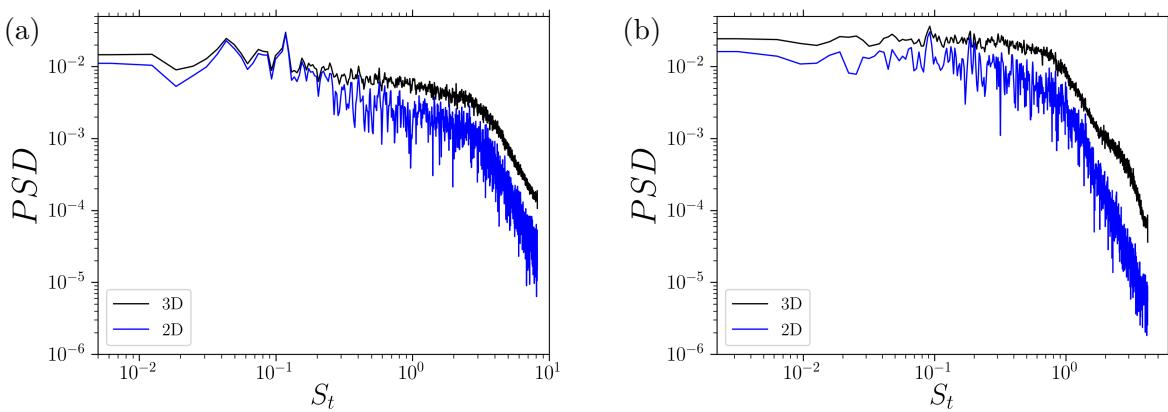


Figure 7. Comparison between the PSD of spanwise averaged wall pressure (2D) and the spanwise averaged PSD of wall pressure (3D) at (a) suction side (probe 3) and (b) pressure side (probe 6).

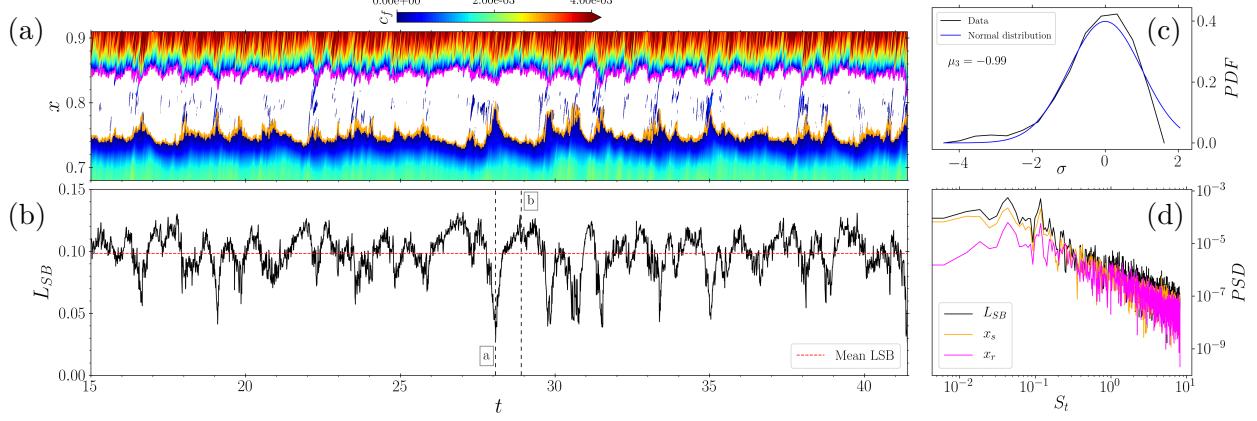


Figure 8. Skin friction analysis of the suction side separation bubble with (a) space-time c_f variation, (b) temporal variation of separation bubble length L_{SB} , (c) PDF of L_{SB} as a function of its standard deviation σ , and (d) PSD of L_{SB} .

specting the skin friction distribution. The space-time variation of skin friction coefficient is presented in Fig. 8(a), where the white area displays the separation region (i.e., the regions with negative c_f). The orange and magenta lines depict the locations of the separation and reattachment points, $x_s(t)$ and $x_r(t)$, respectively. One can observe that these points are most of the time out of phase, i.e., when x_s moves upstream (downstream), x_r moves downstream (upstream). One can also note that, for some instants, the separation point tends to move further downstream, while the instantaneous reattachment point keeps oscillating around its mean value.

To better characterize the separation bubble dynamics, the temporal evolution of the bubble length L_{SB} and its probability density function (PDF) are shown in Figs. 8(b) and 8(c), respectively. The instantaneous length of the separation bubble is defined as $L_{SB}(t) = x_r(t) - x_s(t)$. The low-frequency unsteadiness is apparent in the L_{SB} signal, meaning that the separation bubble undergoes a low-frequency contraction/expansion motion. One can also observe that, in some instants, the separation bubble has very small sizes which coincide with the moments when the separation point moves further downstream. This effect leads to a negative skewness in the PDF shown in Fig. 8(c). The PSDs of L_{SB} , x_s and x_r are presented in Fig. 8(d). For all spectra, two energetic low-frequency peaks are captured at $St \approx 0.045$ and $St \approx 0.12$. According to previous studies [12, 19, 25], the first peak may be associated with the bubble breathing and shock oscillations, while the second peak should

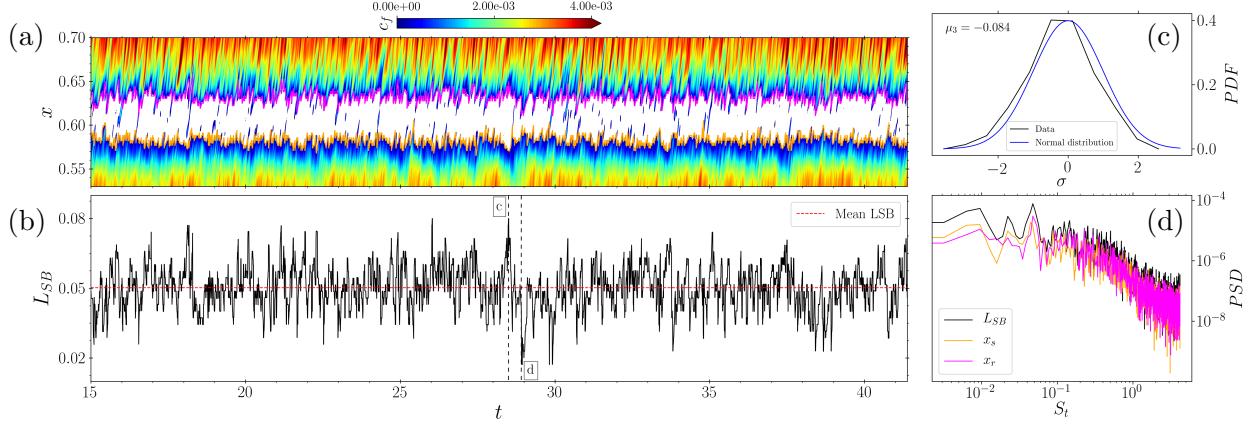


Figure 9. Skin friction analysis of the pressure side separation bubble with (a) space-time c_f variation, (b) temporal variation of separation bubble length L_{SB} , (c) PDF of L_{SB} as a function of standard deviation σ , and (d) PSD of L_{SB} .

corresponds to flapping of the shear layer.

Figure 9 presents a similar analysis of the skin friction coefficient for the pressure side separation bubble. In Fig. 9(a), one can see that the separation and reattachment points tend to oscillate around their mean values, without large excursions. This trend is confirmed by Figs. 9(b) and 9(c), which show the separation bubble length L_{SB} and the PDF of this signal. Differently from the suction side, the PDF computed for the pressure side is symmetric about the mean, resembling a Gaussian distribution. The spectral analyses of the separation and reattachment points, as well as of the bubble length, are shown in Fig. 9(d) as the PSD of the x_s , x_r and L_{SB} signals. All spectra show a dominant peak at $St \approx 0.045$, which is most likely associated with the breathing motion of the separation bubble and the reflected shock oscillation, as previously discussed. However, the pressure side spectra also contains even lower frequency tones. It is important to remind that the Strouhal numbers for the pressure and suction sides are computed by the respective mean bubble lengths $\langle L_{SB} \rangle$.

In order to illustrate the 2D structure of the separation bubble and shear layer at different instants, snapshots of z -vorticity are shown on the suction and pressure sides in Fig. 10. These snapshots correspond to the instants (a) and (b) indicated by vertical dashed lines in Fig. 8(b), and instants (c) and (d) marked in Fig. 9(b). In Fig. 10, the region enclosed by the green line shows the recirculation bubble and the black lines display the incident shocks. In addition, the mean separation and reattachment locations are denoted by the

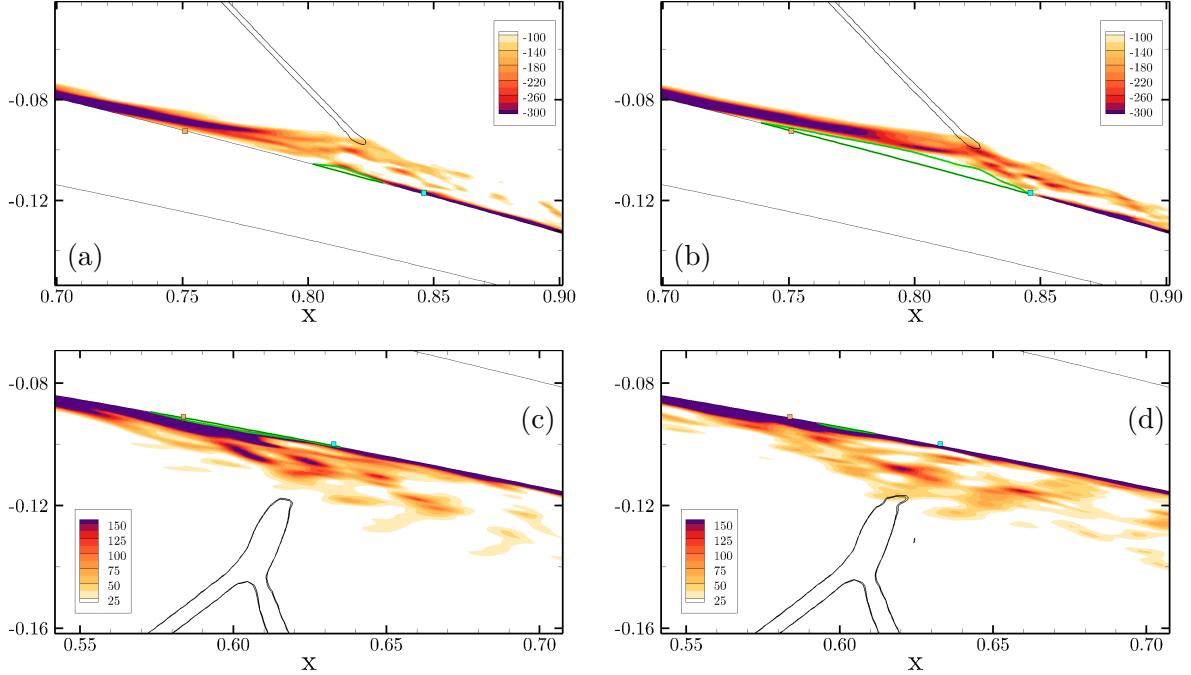


Figure 10. Spanwise and time averaged z -vorticity contours at different time instants on the (a,b) suction side and (c,d) pressure side. The green lines depict the separation bubble and the black lines show the incident shock visualized by the pressure gradient magnitude. The colored squares represent the mean separation and reattachment positions.

orange and cyan squares, respectively. In Fig. 10(a), the bubble suffers a contraction and the instantaneous separation point moves considerably downstream with respect to its mean value, while the reattachment point moves slightly upstream from the mean. The figure also shows that the shear layer around the bubble and downstream of it is more diffused when the bubble is small.

The snapshot displayed in Fig. 10(b) shows an instant when the recirculation bubble is expanded. In this case, one can observe the upstream movement of the instantaneous separation point, whereas the reattachment point is near its mean position. At this time instant, the shear layer around the bubble is elongated and has higher vorticity levels compared to the smaller bubble. In both cases, a region of strong vorticity develops downstream, very close to the wall. A movie displaying the time evolution of the 2D structure of the separation bubble and shear layer on the suction side is provided as supplemental material (movie 6).

Figures 10(c) and 10(d) present the snapshots of the pressure side separation bubble at

time instants when the bubble is small and large, respectively. For the former case, one can observe a small downstream displacement of the instantaneous separation point with respect to the mean. On the other hand, the reattachment point moves upstream from its reference location. When the separation bubble is larger, the instantaneous separation point has moved slightly upstream with respect to the mean, while the reattachment position is near its mean location. These trends are similar to those observed for the suction side bubble, although the incident shock structures are different. For the pressure side, the shear layers are more diffused near the incident shock and a strong vorticity layer is maintained everywhere near the wall. A movie showing the time evolution of the 2D structure of the separation bubble and shear layer on the pressure side is provided as supplemental material (movie 7).

C. Dynamics of shock-boundary layer interactions

The unsteadiness of the separation bubble and reattachment shock is investigated by analyzing of the pressure signals and their corresponding PSDs. First, the temporal evolution of pressure signals at probes 1-4 on the suction side are shown in Fig. 11(a), where the probe locations are indicated in Fig. 3. The incoming boundary layer (probe 1) shows smaller pressure fluctuations compared to the other locations. For probes 2 and 3, positioned inside the separation bubble, one can observe an increase in the mean pressure as well as an amplification of the pressure fluctuations. These effects are more pronounced for probe 3 due to the incident shock. Moreover, the signals from probes 2 and 3 appear to be anti-correlated while those from probes 3 and 4 are highly correlated. In this previous case, the strong pressure variations extracted at probe 4 exhibit a phase shift, being preceded by those from probe 3. One can also notice that the high pressure fluctuations coincide with those instants when the separation bubble is contracted, as can be seen in Fig. 8(b).

In order to further characterize the SBLI dynamics, the PSDs of the pressure signals at probes 1-4 are presented in Fig. 11(b). The spectral analysis yields results similar to those from Fig. 8(d). The same low-frequency peaks previously observed in the motion of the separation bubble are captured by probes 2 to 4. Two dominant peaks appear at $St \approx 0.045$ and $St \approx 0.12$. On the other hand, the pressure spectrum computed for the upstream turbulent boundary layer (probe 1) does not present the tones and is more

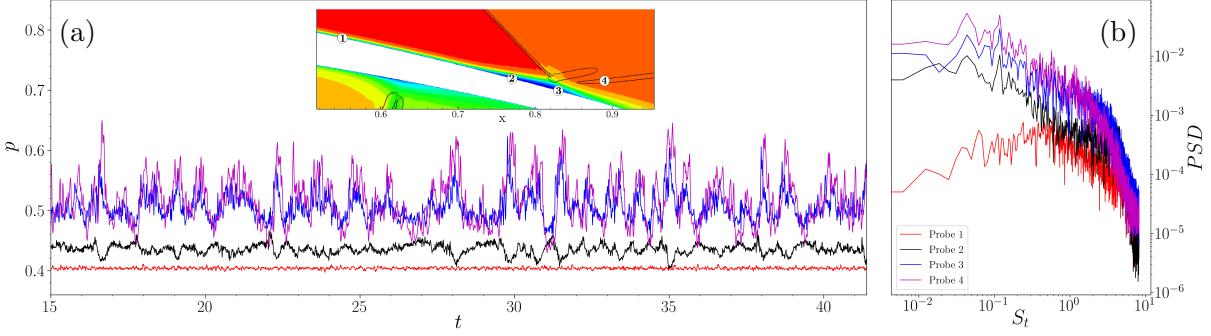


Figure 11. Spectral analysis of the spanwise averaged wall pressure at different locations on the suction side with (a) pressure fluctuations and (b) the corresponding PSDs.

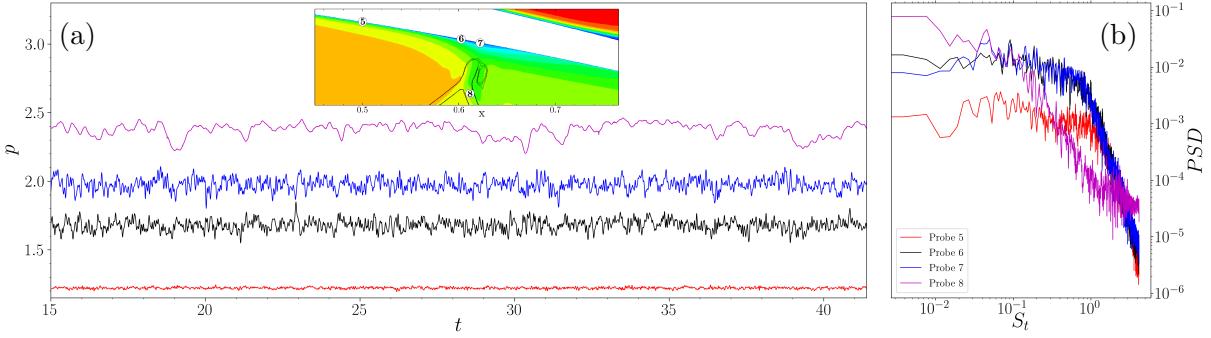


Figure 12. Spectral analysis of the spanwise averaged wall pressure at different locations on the pressure side with (a) pressure fluctuations and (b) the corresponding PSDs.

broadband. Furthermore, the energetic content of this spectrum is contained at higher Strouhal numbers, while the opposite is true for the probes at the recirculation and shock regions.

The pressure signals and their PSDs at probes 5-8 (pressure side) are shown in Figs. 12(a) and 12(b), respectively, where the probe locations are presented in Fig. 3. Similarly to the suction side, the upstream boundary layer signal from probe 5 exhibits smaller pressure fluctuations compared to the other signals. For this probe, the signal energy is spread across a broad range of frequencies ($St \approx 0.01 - 1.0$). Differently from the suction side, the pressure fluctuations have similar amplitudes along the bubble at probes 6 and 7. From a visual inspection, the correlation from these two probes do not seem correlated. Probe 8 exhibits lower frequency pressure fluctuations. Since this probe is located on the reflected shock, which is further away from the turbulent boundary layer, its spectrum shows a fast decay at the higher Strouhal numbers. The PSDs computed for the probes inside the bubble

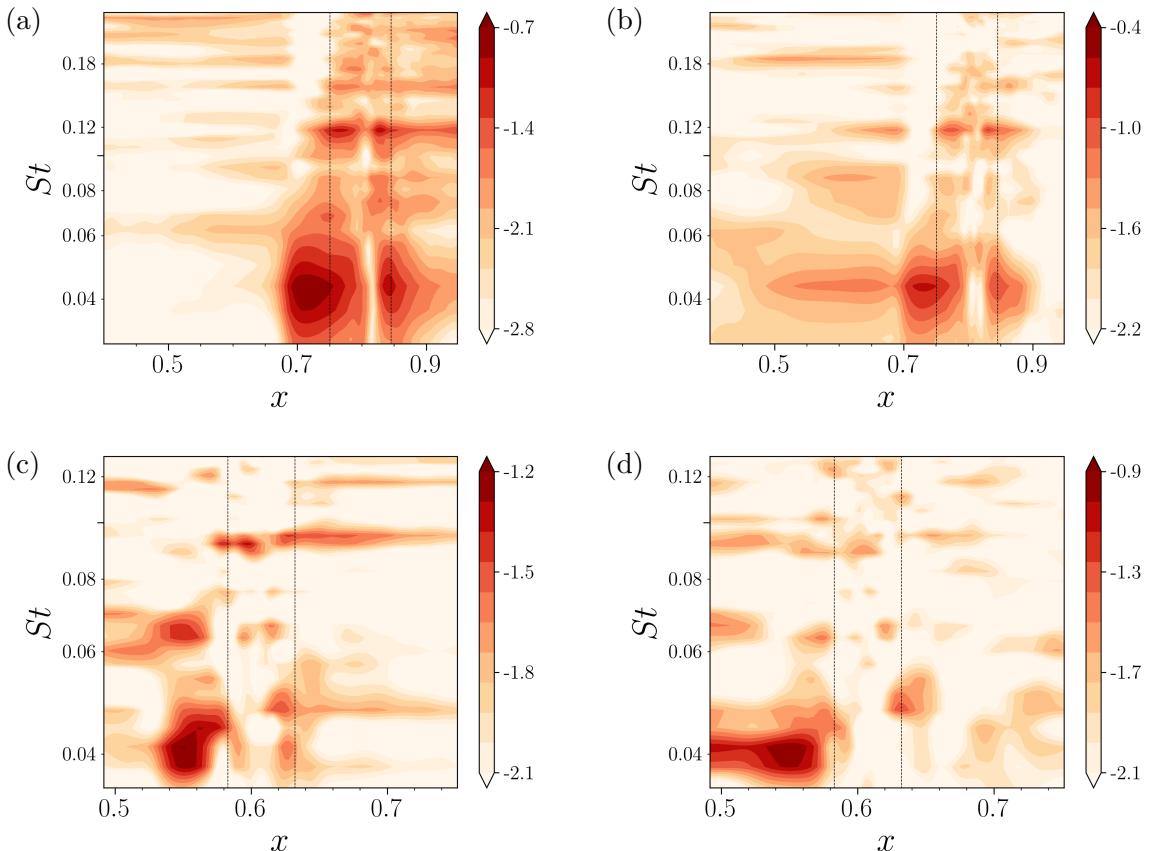


Figure 13. Power spectral density maps on the suction (top row) and pressure (bottom row) sides. Results are presented for (a,c) wall pressure and (b,d) tangential velocity at $y^+ \approx 6$. Black dashed lines indicate the mean separation and reattachment locations.

and at the shock display a tonal peak at $St \approx 0.045$ and its harmonic $St \approx 0.09$.

Figure 13 shows the contours of PSD in terms of wall pressure (left column) and tangential velocity at $y^+ \approx 6$ (right column) as a function of the frequency (St) and the airfoil chord location (x). The top and bottom rows present results for the suction and pressure sides, respectively. The PSD at each streamwise position is normalized by its integrated value for all frequencies and color levels are plotted in log-scale. The black vertical dashed lines indicate the mean separation and reattachment positions. In Fig. 13(a), one can observe two pronounced peaks at $St \approx 0.045$ and $St \approx 0.12$. For the lower frequency, the peaks appear just upstream the mean separation point and at the mean reattachment position. On the other hand, the higher frequency peaks are excited inside the bubble, slightly downstream the separation point and upstream of the reattachment location.

The PSD map of the tangential velocity near the wall is presented in Fig. 13(b) and allows one to infer about the upstream boundary layer influence on the low-frequency unsteadiness. Results are obtained for the same y -position as in Figs. 5(e) and 5(f), which show streaks impinging on the separation bubble. The PSD maps of the streamwise velocity show that the incoming boundary layer excites several frequencies in the lower band of the spectrum. However, the separation region responds selectively to an excitation at $St \approx 0.045$. This result suggests that near-wall streaks in the upstream boundary layer drive the separation bubble motion, which is in close agreement with the observations in Fig. 5 and conforms with the findings of previous studies from Refs. [13, 31].

Results for the pressure side are plotted in Figs. 13(c) and 13(d). The wall pressure PSD displays two regions with high spectral energy at $St \approx 0.045$, as can be seen in Fig. 13(c). The first one appears upstream of the separation region and the second spot is observed near the reattachment location. A higher frequency at $St \approx 0.09$ is excited along the recirculation bubble and downstream of the SBLI. The PSD map of the tangential velocity near the wall is shown in 13(d) and results are obtained for the same wall-normal position as in Figs. 6(e) and 6(f). This map illustrates that the upstream boundary layer carries some content in the lower band of the spectrum, where a region of high spectral energy is observed at $St \approx 0.04$. Differently from the suction side, the recirculation bubble is not excited by velocity fluctuations at low-frequencies. That occurs because most streaks are transported above the pressure side bubble, which is thinner than the bubble formed on the suction side.

In order to further investigate the influence of upstream or downstream disturbances in the SBLI, an analysis of space-time correlations is presented in Fig. 14 for the suction side. A similar analysis was also conducted for the pressure side SBLI, but lower correlations were observed. In the figure, the vertical dotted lines delimit the region of separated flow. Figure 14(a) presents the cross-correlation of the tangential velocity computed at probe 9 from Fig. 3 with the skin-friction coefficient along the suction side. The probe is placed upstream of the separation bubble, at $y^+ \approx 6$. In this figure, a region of high correlation is observed upstream of the separation region, near the reference location, indicating the presence of near-wall flow structures in the incoming boundary layer. The mean convective velocity U_c of such structures is estimated from the plot as $U_c/U_\infty \approx 0.67$. A high correlation is also computed at the mean separation and reattachment points, and they occur at positive

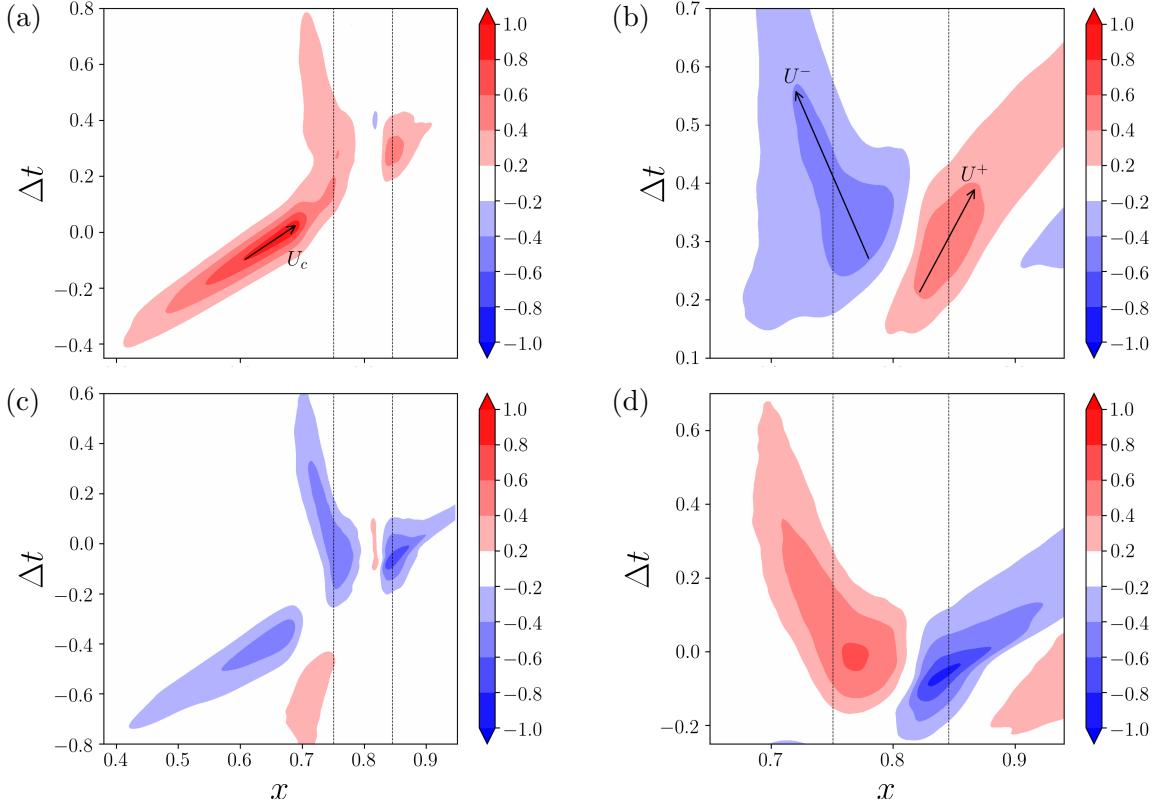


Figure 14. Suction side space-time correlations computed for (a) tangential velocity at upstream location (probe 9) with skin-friction coefficient, (b) tangential velocity at probe 9 with wall pressure, (c) tangential velocity at the reattachment shock (probe 4) with skin-friction coefficient, and (d) tangential velocity at probe 4 with wall pressure.

values of time delay Δt , based on the inlet velocity. This suggests that the large-scale structures in the incoming boundary layer drive the separation bubble motion. As it can be seen from the plot, the tangential velocity fluctuations in the upstream boundary layer are positively correlated with the skin-friction coefficient. Therefore, the positive (negative) near-wall velocity fluctuations lead to an increase (decrease) in the skin-friction coefficient. This result confirms the previous observation from Fig. 8, i.e., the fast (slow) boundary layer streaks cause a contraction (expansion) of the separation bubble.

The space-time correlation computed for the tangential velocity at probe 9 and the wall pressure along the suction side is shown in Fig. 14(b). The first observation from this plot is that the tangential velocity fluctuations in the upstream boundary layer are negatively correlated with the wall pressure at the bubble leading edge. On the other hand, the correlation is positive at the bubble trailing edge, indicating a phase jump of π in the pressure

fluctuations along the bubble. This finding has also been reported in previous studies [12, 19, 20, 66, 67]. The time delay is positive, indicating that the pressure disturbances arise after the advection of the boundary layer streaks. A second observation from this figure concerns the propagation mechanisms of pressure disturbances. A closer look at the cross-correlation reveals that the bubble leading edge responds to its trailing edge due to the positive time delay. After the jump, a downstream propagating pressure disturbance is seen, while before the jump, we observe an upstream propagating pressure disturbance. The propagation speeds of such disturbances can be estimated from the plot as $U_-/U_\infty \approx -0.21$ and $U_+/U_\infty \approx 0.25$, where U_+ and U_- represent the speed of propagation of upstream and downstream pressure disturbances, respectively.

The correlation of the tangential velocity at the reattachment shock (probe 4) with the skin-friction coefficient is shown in Fig. 14(c). It can be seen that the tangential velocity fluctuations at the reattachment shock are negatively correlated with the skin-friction coefficient. Similar to Fig. 14(a), three regions of high correlation are observed, indicating that the motion of the reattachment shock is associated with the skin-friction and, hence, with the streaks in the incoming boundary layer as well as the separation bubble. Results suggest that negative (positive) tangential velocity fluctuations in the incoming near-wall flow lead to an expansion (contraction) of the bubble, which in turn result in the downstream (upstream) motion of the reattachment shock. When the bubble expands (contracts), the skin-friction is reduced (increased) and the shock moves downstream (upstream) leading to positive (negative) velocity fluctuations.

Finally, Fig. 14(d) presents the space-time correlation of tangential velocity at probe 4 from Fig. 3 and wall pressure. As can be seen from the figure, the tangential velocity fluctuations at the reattachment shock are positively correlated with the wall pressure on the bubble leading edge. The opposite is true for the bubble trailing edge due to the phase jump previously observed. From this figure, higher correlation values occur at “negative time delays” near the mean reattachment point, indicating that the reattachment shock is preceded by the pressure disturbances at the wall. This observation suggests that the bubble drives the shock motion.

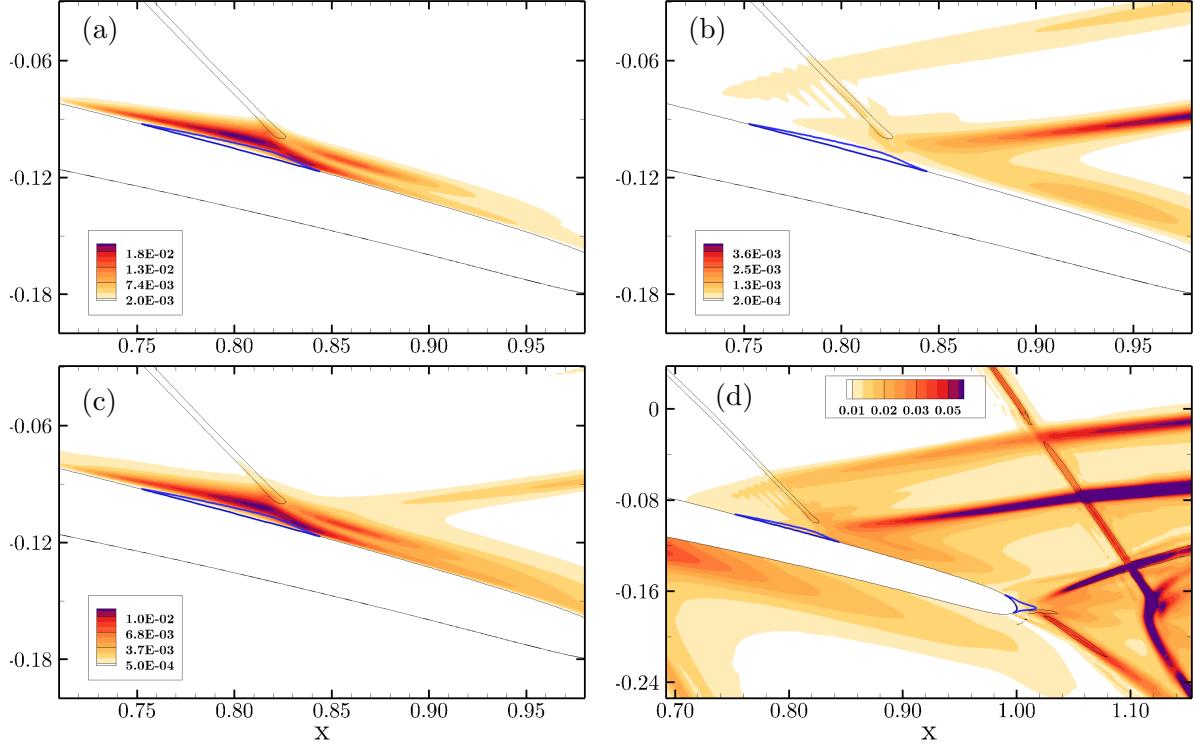


Figure 15. Spanwise and time averaged turbulence quantities on the suction side with (a) $\langle u_t u_t \rangle$, (b) $\langle u_n u_n \rangle$, (c) turbulent kinetic energy, and (d) pressure RMS.

D. Analysis of coherent structures

In previous sections, it was observed that the large-scale boundary layer structures impinge on the separation bubble, playing an important role on the bubble and shock motions. In order to better understand the bubble-shock interactions on both sides of the airfoil, including their excitation frequencies, an analysis is presented in this section via the filtered POD method. The sum of all the POD modes should provide a reconstruction of the flow fluctuation field. Hence, before the POD analysis is performed, a series of some turbulent quantities are presented in Fig. 15 for the suction side, namely, the tangential and wall-normal Reynolds stresses, $\langle u_t u_t \rangle$ and $\langle u_n u_n \rangle$, respectively, the turbulent kinetic energy (TKE) and the pressure RMS. These quantities allow an assessment of the flow regions where the fluctuations are more pronounced.

Intense values of the tangential Reynolds stress component $\langle u_t u_t \rangle$ are found along the shear layer, over the separation bubble, as can be seen in Fig. 15(a). Downstream the incident shock, the maximum values of $\langle u_t u_t \rangle$ present a bifurcation with one branch along

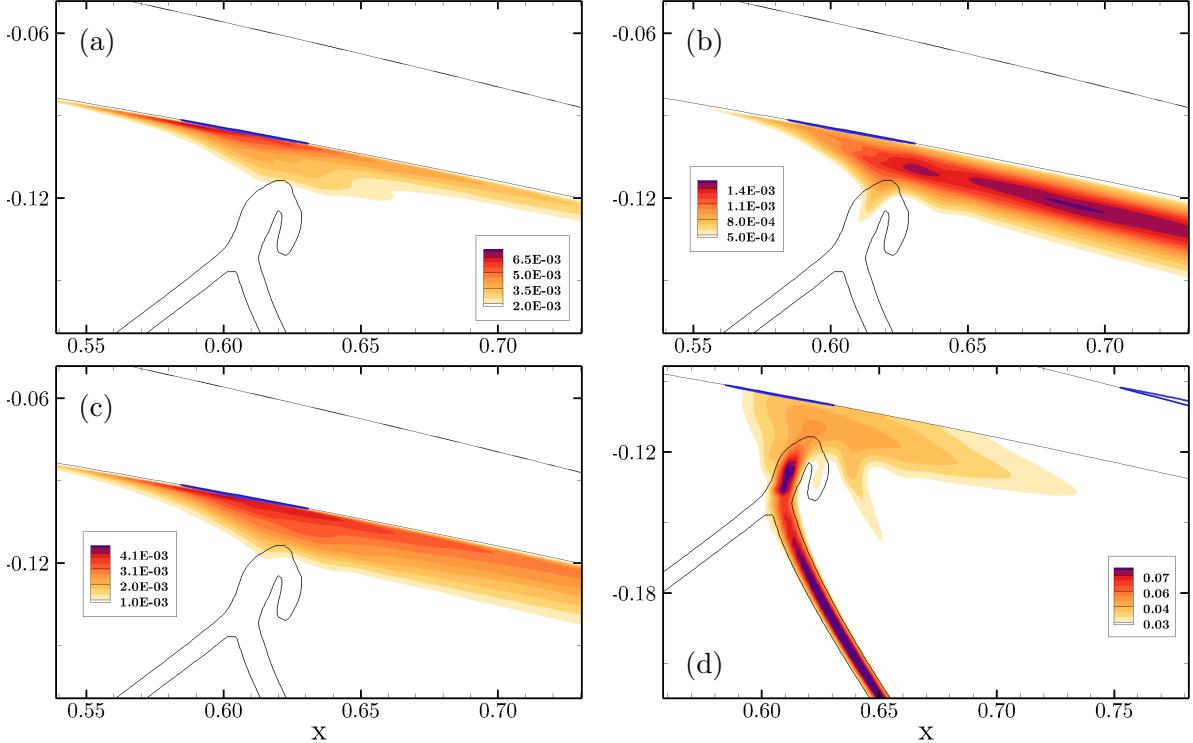


Figure 16. Spanwise and time averaged turbulence quantities on the pressure side with (a) $\langle u_t u_t \rangle$, (b) $\langle u_n u_n \rangle$, (c) turbulent kinetic energy, and (d) pressure RMS.

the free shear layer and another one along the wall. In Fig. 15(b), high values of $\langle u_n u_n \rangle$ are observed upstream of the bubble. The highest fluctuations of the wall-normal stress component are observed at the reattachment shock characterizing its unsteady motion. In addition, a region with high levels of $\langle u_n u_n \rangle$ is also found along the free shear layer downstream the bubble. As expected, the distribution of turbulent kinetic energy captures the fluctuations of $\langle u_t u_t \rangle$ and $\langle u_n u_n \rangle$ combined, as can be seen in Fig. 15(c). The pressure RMS contours plotted in Fig. 15(d) show the unsteadiness of the upstream compression waves at the bubble leading edge and the reattachment shock, as well as the trailing edge shocks. According to Delery [4], the wall curvature leads to a weakening of the separation shock by producing expansion waves of opposite magnitude. Thus, the upstream compression waves may not coalesce into a separation shock.

Figure 16 exhibits the Reynolds stress components, the TKE and the pressure RMS contours on the pressure side. Similarly to the suction side, Fig. 16(a) shows that high intensity levels of $\langle u_t u_t \rangle$ are present along the shear layer over the bubble and slightly upstream, possibly being connected to a local flow deceleration as suggested by Fang *et al.*

[65]. A region of high $\langle u_t u_t \rangle$ values is also found downstream of the bubble, near the wall. However, contrary to the suction side, no sign of the bifurcation is evident in the $\langle u_t u_t \rangle$ distribution after the bubble. In Fig. 16(b), one can observe intense values of $\langle u_n u_n \rangle$ along the free shear layer downstream the shock, indicating the presence of strong wall-normal velocity fluctuations on that region. The turbulent kinetic energy combines the trends observed from the $\langle u_t u_t \rangle$ and $\langle u_n u_n \rangle$ components, as can be visualized in Fig. 16(c). Finally, the pressure RMS plot shows strong fluctuations along the reflected shock, revealing its unsteadiness.

The filtered (spectral) proper orthogonal decomposition is applied to identify organized motions in the flow and their corresponding characteristic frequencies. This technique will enable associating the low-frequency unsteady motions observed in the SBLIs to particular flow features. The current modal analysis is conducted using 5610 snapshots with a time interval of 0.0048. A Gaussian filter is applied to 50 % of the POD correlation matrix. If a lower filter size is employed, noise can still be present in the low-frequency dynamics of the POD temporal modes. The first 100 POD modes are analyzed and we select specific POD modes based on the characteristic frequencies identified by the spectral analysis presented throughout this paper. The cumulative energy of the first 100 modes, for each independent quantity, is shown in Figs. 17(a) and (b) for the suction and pressure sides, respectively. Figures 18 and 19 show the POD modes computed for a region covering the SBLIs on the suction and pressure sides of the airfoil, respectively. The first, second and third columns represent the spatial modes of tangential velocity u_t , normal velocity u_n , and pressure, respectively, and the last column depicts the PSD of the POD temporal modes.

On the suction side, the POD spatial modes associated with $St \approx 0.045$ are shown in Figs. 18(a) - (c). The POD modes of u_t and u_n , from Figs. 18(a) and 18(b), highlight the tangential velocity fluctuations along the shear layer over the separation bubble and the wall-normal velocity fluctuations of the upstream compression waves and reattachment shock. These plots confirm that the bubble and shock motions are interrelated. Pressure fluctuations are observed over the recirculation region in Fig. 18(c), indicating the bubble breathing. The POD pressure mode displays two major regions of fluctuations: a blue one related with the bubble leading edge, and a red one connected to its trailing edge. This result shows that these regions tend to fluctuate out of phase, confirming the findings from Fig. 14(b). Moreover, these regions of intense pressure fluctuations can be associated with

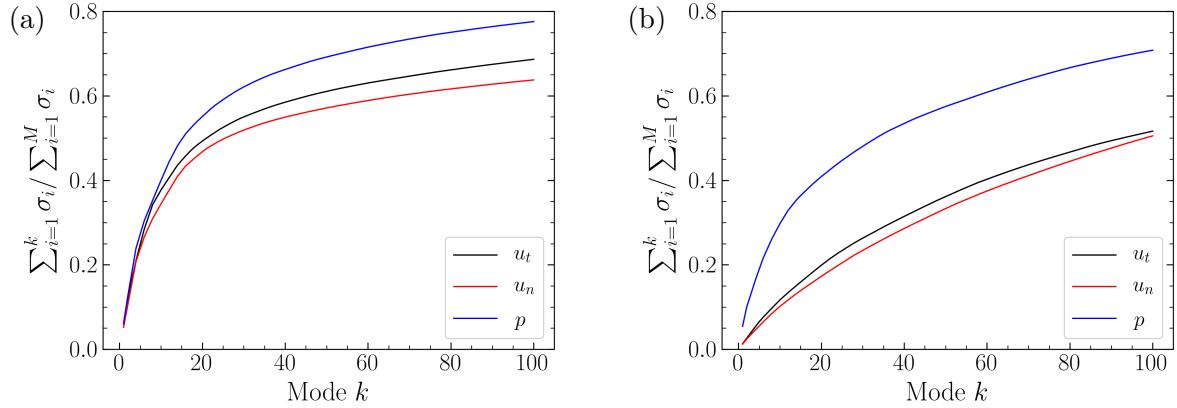


Figure 17. Cumulative modal energy of the k -th mode cumulative sum for (a) suction side and (b) pressure side.

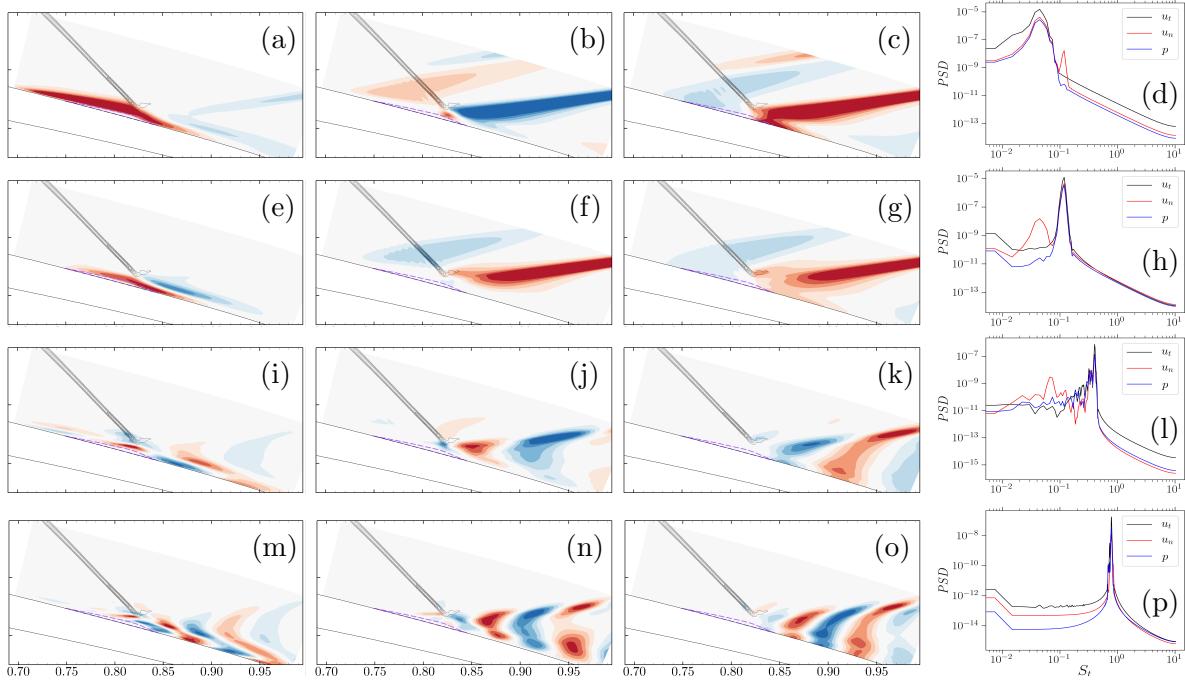


Figure 18. Filtered POD modes selected based on the frequency content along the suction side. The first, second and third columns show the spatial modes of u_t , u_n , and p , respectively. The fourth column presents the PSD of the temporal modes.

those of high spectral energy at $St \approx 0.045$, displayed in Fig. 13(a). Furthermore, the pressure fluctuations have a similar spatial support compared to the wall-normal velocity fluctuations on the upstream compression waves and the reattachment shock.

Figures 18(e) - (g) show the POD spatial modes associated with $St \approx 0.12$. The spatial distribution of these POD modes is similar to that from the previous ones. The characteristic frequency at $St \approx 0.12$ is most likely to be related to a low/mid frequency motion of the separation bubble, and the subsequent shock oscillations and shear layer flapping. The present frequency is also observed in the wall pressure PSDs of previous studies [12, 19, 20], and Adler and Gaitonde [25] reports that this frequency should correspond to bubble oscillations. Their results indicated the presence of high spectral energy associated to this frequency near the separation and reattachment points, as well as downstream of the SBLI. The pressure fluctuations at this frequency are also observed in the regions of high spectral energy displayed in Fig. 13(a).

The POD modes associated with $St \approx 0.4$ are presented in Figs. 18(i) - (k). This frequency was not clearly identified by the previous spectral analysis due to the broadband content present at that particular range. With the filtered POD approach, we can investigate these mid-frequencies since the filtering operation works as a band-pass filter of the POD temporal modes. In the figures, the POD spatial modes illustrate the vortical structures of a K-H instability produced on the shear layer downstream the incident shock. Velocity and pressure fluctuations are also propagated along the reattachment shock which transports tangential disturbances. Similar results have been reported in Refs. [28, 47, 50]. The POD spatial modes for the first harmonic of the K-H instability at $St \approx 0.8$ are shown in Figs. 18(m) to 18(o). These modes are similar to the previous ones and display the shedding of smaller vortices, as well as the propagation of waves along the reattachment shock.

On the pressure side, the POD spatial modes associated with $St \approx 0.045$ are shown in Figs. 19(a) - (c). Similarly to the suction side, high fluctuations are found along the flow recirculation and shear layer regions, indicating the bubble motion. The pressure mode displays two regions of high fluctuations, where the red one is related with the bubble leading edge and upstream compression waves, while the blue region is connected to the bubble trailing edge and the reflected shock. The flow locations where these pressure fluctuations appear are associated with those of high spectral energy at $St \approx 0.045$ displayed in Fig. 13(c). The POD spatial mode of tangential velocity shows strong fluctuations along the shear layer, indicating its flapping. Moreover, high fluctuations of tangential and normal velocities, and pressure, are also observed downstream of the shock, suggesting the presence of large-scale structures on that region. This suggests that the frequency of $St \approx 0.045$ is

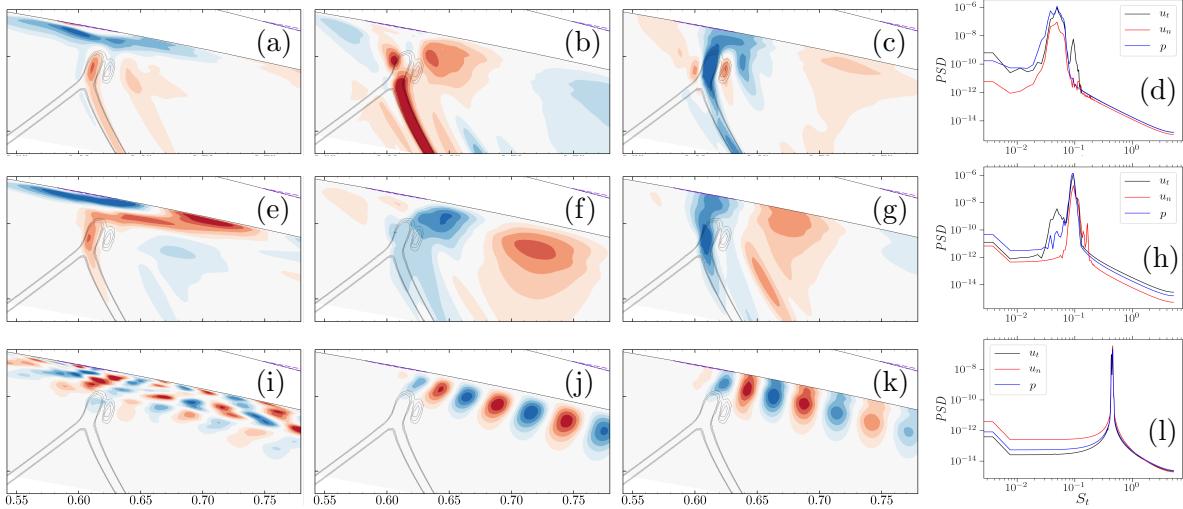


Figure 19. Filtered POD modes selected based on frequency content along the pressure side. The first, second and third columns show the spatial modes of u_t , u_n , and p , respectively. The fourth column presents the PSD of the temporal modes.

associated with the separation bubble motion, the subsequent reflected shock oscillation, shear layer flapping, and the convection of large-scale structures.

Figures 19(e) - (g) display the POD spatial modes associated with $St \approx 0.09$, which is the first harmonic of $St \approx 0.045$. One can observe that the POD spatial modes are similar to those previously analyzed, and this frequency is also associated with a low/mid frequency motion of the separation bubble and the reflected shock. The transport of large-scale structures is also observed in the spatial modes for this frequency. High spectral energy associated to this frequency is present near the flow separation and reattachment points as can be seen in Fig. 13(c). The POD spatial modes at $St \approx 0.45$ are presented in Figs. 19(i) - (k). These modes display the shedding of K-H vortices along the shear layer, downstream of the shock. Differently from the suction side, high fluctuations are not transported along the reflected shock since these structures appear closer to the wall, while the oblique shock from the Mach reflection is displaced with respect to the wall due to the normal shock.

V. CONCLUSIONS

In the present work, an investigation of SBLIs is presented for supersonic turbine cascades using a wall-resolved large eddy simulation. Different shock structures are formed on both

sides of the airfoil. On the suction side, an oblique shock impinges on the boundary layer and that leads to an intermittent reattachment shock downstream of the recirculation bubble. Compression waves are also observed near the separation region, but they do not coalesce to form a separation shock. On the pressure side, the incident shock interacts with the boundary layer and generates a Mach reflection. The mean flow visualization shows that the separation bubbles have different topologies, with the suction side bubble being longer and thicker, and the pressure side one being shorter and thinner.

The low-frequency unsteadiness of the SBLIs is characterized by means of flow visualization, spectral analysis, space-time cross correlations and flow modal decomposition. Instantaneous flow visualizations illustrate the unsteady dynamics of the SBLIs, which involve breathing of the separation bubbles, flapping of the shear layers and shock motions. The presence of elongated streamwise structures is noticed in the incoming boundary layers on both sides of the airfoil and the passage of high-speed (low-speed) streaks through the bubbles leads to downstream (upstream) motions of the separation points. These motions are highlighted by the skin-friction distributions along the vane surface, which show wavy spanwise variations of the bubbles. Tangential velocity fluctuations computed along a plane near the wall reveal that the separation region conforms to the presence of negative incoming velocity fluctuations, while the reattached regions are associated with positive fluctuations. These findings are consistent with previous studies.

A spatio-temporal analysis of the suction side separation bubble indicates that the separation and reattachment points are mostly out of phase. When the bubble undergoes a contraction, the instantaneous separation point moves considerably downstream with respect to its mean position, while the reattachment point moves slightly upstream. The opposite is true for the bubble expansion. Similar analyses are performed for the pressure side bubble but, contrary to the suction side, the separation and reattachment points tend to oscillate around their mean values, without large excursions. The spectral analyses of the suction side separation and reattachment points, as well as of the bubble length, show the presence of two energetic low-frequency peaks at $St \approx 0.045$ and $St \approx 0.12$. For the pressure side, the power spectra indicate one dominant peak at $St \approx 0.045$.

The influence of the incoming boundary layer on the bubble low-frequency unsteadiness is investigated by means of pressure and velocity power spectral density maps. Results of the latter show that velocity fluctuations in the incoming boundary layer at the specific

low-frequency of $St \approx 0.045$ excite both the bubble separation and reattachment locations. On the pressure side, the PSD map of wall pressure shows two dominant peaks at $St \approx 0.045$ and 0.09. For the first peak, high spectral energy is observed upstream of the recirculation bubble and near the reattachment position, while the second peak displays regions of high spectral energy along the entire separation bubble and downstream of the SBLI. Differently from the suction side, the separation bubble is not excited by tangential velocity fluctuations at low-frequencies.

The driving mechanism of the low-frequency unsteadiness is investigated analyzing the space-time correlations on the suction side. Results reveal the advection of near-wall velocity structures in the incoming boundary layer. These structures drive the motion of the separation bubble which in turn causes the reattachment shock motion. The correlations also show the existence of a π phase jump in terms of pressure fluctuations along the separation bubble, a finding which is also reported in previous studies. After the jump, a downstream propagating pressure disturbance is observed, while before the jump, an upstream propagating pressure disturbance is seen.

The filtered (spectral) POD is employed to identify organized motions in the SBLIs and their corresponding characteristic frequencies. On the suction side, the separation bubble and shock motions, and the shear layer flapping, are associated with the frequencies of $St \approx 0.045$ and 0.12. The POD analysis also shows that the shedding of K-H vortices occur at the frequency of $St \approx 0.4$. At this frequency, velocity and pressure fluctuations are also observed propagating along the reattachment shock. On the pressure side, the POD modes associated with $St \approx 0.045$ are related to the separation bubble motion, the subsequent reflected shock oscillation, shear layer flapping, and the convection of large-scale structures. The frequency of $St \approx 0.09$, which is the first harmonic of $St \approx 0.045$, is also related to the aforementioned flow features. Similarly to the suction side, the shedding of K-H structures is associated with a frequency of $St \approx 0.45$, but in this case, flow fluctuations are not transported along the reflected shock which is located away from the wall due to the Mach reflection.

ACKNOWLEDGMENTS

The authors acknowledge the financial support received from Fundação de Amparo à Pesquisa do Estado de São Paulo, FAPESP, under grants No. 2013/08293-7, 2019/26196-5 and 2021/06448-0. Numerical simulations were performed in the SDumont supercomputer at the National Laboratory for Scientific Computing (LNCC/MCTI, Brazil) through project SimTurb, and also on the Stampede 2 cluster at the Texas Advanced Computing Center (TACC), via allocation TG-CTS200027. For the latter, this work used the Extreme Science and Engineering Discovery Environment (XSEDE) [68], which is supported by the National Science Foundation grant number ACI-1548562.

- [1] G. Paniagua, M. Iorio, N. Vinha, and J. Sousa, Design and analysis of pioneering high supersonic axial turbines, *International Journal of Mechanical Sciences* **89**, 65 (2014).
- [2] J. Sousa, G. Paniagua, and E. C. Morata, Thermodynamic analysis of a gas turbine engine with a rotating detonation combustor, *Applied Energy* **195**, 247 (2017).
- [3] D. Rubini, L. Xu, B. Rosic, and H. Johannesdahl, A new turbomachine for clean and sustainable hydrocarbon cracking, *Journal of Engineering for Gas Turbines and Power* **144**, 10.1115/1.4052784 (2021).
- [4] J. M. Delery, Shock wave/turbulent boundary layer interaction and its control, *Progress in Aerospace Sciences* **22**, 209 (1985).
- [5] H. Babinsky and J. Harvey, *Shock Wave-Boundary-Layer Interactions*, Cambridge Aerospace Series (Cambridge University Press, 2011).
- [6] D. V. Gaitonde, Progress in shock wave/boundary layer interactions, *Progress in Aerospace Sciences* **72**, 80 (2015).
- [7] J. Klinner, A. Herdt, S. Grund, and C. E. Willert, Experimental investigation of shock-induced separation and flow control in a transonic compressor cascade, *Experiments in Fluids* **60**, 1 (2019).
- [8] S. M. Spottswood, T. J. Beberniss, T. G. Eason, R. A. Perez, J. M. Donbar, D. A. Ehrhardt, and Z. B. Riley, Exploring the response of a thin, flexible panel to shock-turbulent boundary-layer interactions, *Journal of Sound and Vibration* **443**, 74 (2019).

- [9] R. D. Sandberg and V. Michelassi, Fluid dynamics of axial turbomachinery: Blade- and stage-level simulations and models, *Annual Review of Fluid Mechanics* **54**, 255 (2022).
- [10] N. T. Clemens and V. Narayanaswamy, Low-frequency unsteadiness of shock wave/turbulent boundary layer interactions, *Annual Review of Fluid Mechanics* **46**, 469 (2014).
- [11] J.-P. Dussauge, P. Dupont, and J.-F. Debièvre, Unsteadiness in shock wave boundary layer interactions with separation, *Aerospace Science and Technology* **10**, 85 (2006).
- [12] P. Dupont, C. Haddad, and J. F. Debièvre, Space and time organization in a shock-induced separated boundary layer, *Journal of Fluid Mechanics* **559**, 255–277 (2006).
- [13] B. Ganapathisubramani, N. T. Clemens, and D. S. Dolling, Low-frequency dynamics of shock-induced separation in a compression ramp interaction, *Journal of Fluid Mechanics* **636**, 397–425 (2009).
- [14] S. Piponnaiu, J. P. Dussauge, J. F. Debièvre, and P. Dupont, A simple model for low-frequency unsteadiness in shock-induced separation, *Journal of Fluid Mechanics* **629**, 87–108 (2009).
- [15] C. S. Combs, E. L. Lash, P. A. Kreth, and J. D. Schmisser, Investigating unsteady dynamics of cylinder-induced shock-wave/transitional boundary-layer interactions, *AIAA Journal* **56**, 1588 (2018).
- [16] Z. R. Murphree, C. S. Combs, W. M. Yu, D. S. Dolling, and N. T. Clemens, Physics of unsteady cylinder-induced shock-wave/transitional boundary-layer interactions, *Journal of Fluid Mechanics* **918**, A39 (2021).
- [17] S. Pirozzoli and F. Grasso, Direct numerical simulation of impinging shock wave/turbulent boundary layer interaction at $M=2.25$, *Physics of Fluids* **18**, 065113 (2006).
- [18] M. Wu and M. P. Martín, Analysis of shock motion in shockwave and turbulent boundary layer interaction using direct numerical simulation data, *Journal of Fluid Mechanics* **594**, 71–83 (2008).
- [19] E. Touber and N. D. Sandham, Large-eddy simulation of low-frequency unsteadiness in a turbulent shock-induced separation bubble, *Theoretical and Computational Fluid Dynamics* **23**, 79 (2009).
- [20] S. Priebe and M. P. Martín, Low-frequency unsteadiness in shock wave–turbulent boundary layer interaction, *Journal of Fluid Mechanics* **699**, 1–49 (2012).
- [21] B. Morgan, K. Duraisamy, N. Nguyen, S. Kawai, and S. K. Lele, Flow physics and RANS modelling of oblique shock/turbulent boundary layer interaction, *Journal of Fluid Mechanics*

- 729**, 231–284 (2013).
- [22] G. Aubard, X. Gloerfelt, and J.-C. Robinet, Large-eddy simulation of broadband unsteadiness in a shock/boundary-layer interaction, *AIAA Journal* **51**, 2395 (2013).
- [23] I. Bermejo-Moreno, L. Campo, J. Larsson, J. Bodart, D. Helmer, and J. Eaton, Confinement effects in shock wave/turbulent boundary layer interactions through wall-modelled large-eddy simulations, *Journal of Fluid Mechanics* **758**, 5–62 (2014).
- [24] L. Agostini, L. Larchevêque, and P. Dupont, Mechanism of shock unsteadiness in separated shock/boundary-layer interactions, *Physics of Fluids* **27**, 126103 (2015).
- [25] M. C. Adler and D. V. Gaitonde, Dynamic linear response of a shock/turbulent-boundary-layer interaction using constrained perturbations, *Journal of Fluid Mechanics* **840**, 291–341 (2018).
- [26] M. A. Vyas, D. A. Yoder, and D. V. Gaitonde, Reynolds-stress budgets in an impinging shock-wave/boundary-layer interaction, *AIAA Journal* **57**, 4698 (2019).
- [27] M. C. Adler and D. V. Gaitonde, Dynamics of strong swept-shock/turbulent-boundary-layer interactions, *Journal of Fluid Mechanics* **896**, A29 (2020).
- [28] W. Hu, S. Hickel, and B. W. van Oudheusden, Low-frequency unsteadiness mechanisms in shock wave/turbulent boundary layer interactions over a backward-facing step, *Journal of Fluid Mechanics* **915**, A107 (2021).
- [29] A. S. Deshpande and J. Poggie, Large-scale unsteadiness in a compression ramp flow confined by sidewalls, *Phys. Rev. Fluids* **6**, 024610 (2021).
- [30] S. J. Beresh, N. T. Clemens, and D. S. Dolling, Relationship between upstream turbulent boundary-layer velocity fluctuations and separation shock unsteadiness, *AIAA Journal* **40**, 2412 (2002).
- [31] K. M. Porter and J. Poggie, Selective upstream influence on the unsteadiness of a separated turbulent compression ramp flow, *Physics of Fluids* **31**, 016104 (2019).
- [32] R. Baidya, S. Scharnowski, M. Bross, and C. J. Kähler, Interactions between a shock and turbulent features in a Mach 2 compressible boundary layer, *Journal of Fluid Mechanics* **893**, A15 (2020).
- [33] R. Aris, *Vectors, Tensors, and the Basic Equations of Fluid Mechanics* (Dover Publications, 1989).
- [34] R. Bhaskaran and S. K. Lele, Large eddy simulation of free-stream turbulence effects on heat

- transfer to a high-pressure turbine cascade, *Journal of Turbulence* **11**, N6 (2010).
- [35] S. Nagarajan, S. K. Lele, and J. H. Ferziger, A robust high-order compact method for large eddy simulation, *Journal of Computational Physics* **191**, 392 (2003).
- [36] S. K. Lele, Compact finite difference schemes with spectral-like resolution, *Journal of Computational Physics* **103**, 16 (1992).
- [37] J. Matheu, R. Lechner, H. Foysi, J. Sesterhenn, and R. Friedrich, An explicit filtering method for large eddy simulation of compressible flows, *Physics of Fluids* **15**, 2279 (2003).
- [38] R. M. Beam and R. F. Warming, An implicit factored scheme for the compressible navier-stokes equations, *AIAA Journal* **16**, 393 (1978).
- [39] J. Delfs, An overlapped grid technique for high resolution CAA schemes for complex geometries, in *7th AIAA/CEAS Aeroacoustics Conference and Exhibit* (2001).
- [40] A. W. Cook, Artificial fluid properties for large-eddy simulation of compressible turbulent mixing, *Physics of Fluids* **19**, 055103 (2007).
- [41] S. Kawai, S. K. Shankar, and S. K. Lele, Assessment of localized artificial diffusivity scheme for large-eddy simulation of compressible turbulent flows, *Journal of Computational Physics* **229**, 1739 (2010).
- [42] A. Sansica, *Stability and unsteadiness of transitional shock-wave/boundary-layer interactions in supersonic flows*, Ph.D. thesis, University of Southampton (2015).
- [43] K. Taira, S. L. Brunton, S. T. M. Dawson, C. W. Rowley, T. Colonius, B. J. McKeon, O. T. Schmidt, S. Gordeyev, V. Theofilis, and L. S. Ukeiley, Modal analysis of fluid flows: An overview, *AIAA Journal* **55**, 4013 (2017).
- [44] R. A. Humble, G. E. Elsinga, F. Scarano, and B. W. van Oudheusden, Three-dimensional instantaneous structure of a shock wave/turbulent boundary layer interaction, *Journal of Fluid Mechanics* **622**, 33–62 (2009).
- [45] M. Grilli, P. J. Schmid, S. Hickel, and N. A. Adams, Analysis of unsteady behaviour in shock-wave turbulent boundary layer interaction, *Journal of Fluid Mechanics* **700**, 16–28 (2012).
- [46] S. Priebe, J. H. Tu, C. W. Rowley, and M. P. Martín, Low-frequency dynamics in a shock-induced separated flow, *Journal of Fluid Mechanics* **807**, 441–477 (2016).
- [47] V. Pasquariello, S. Hickel, and N. A. Adams, Unsteady effects of strong shock-wave/boundary-layer interaction at high Reynolds number, *Journal of Fluid Mechanics* **823**, 617–657 (2017).
- [48] J. W. Nichols, J. Larsson, M. Bernardini, and S. Pirozzoli, Stability and modal analysis of

- shock/boundary layer interactions, *Theoretical and Computational Fluid Dynamics* **31**, 33 (2017).
- [49] L. Vanstone and N. T. Clemens, Proper orthogonal decomposition analysis of swept-ramp shock-wave/boundary-layer unsteadiness at Mach 2, *AIAA Journal* **57**, 3395 (2019).
- [50] W. Hu, S. Hickel, and B. van Oudheusden, Dynamics of a supersonic transitional flow over a backward-facing step, *Phys. Rev. Fluids* **4**, 103904 (2019).
- [51] K. Sasaki, D. C. Barros, A. V. G. Cavalieri, and L. Larchevêque, Causality in the shock wave/turbulent boundary layer interaction, *Phys. Rev. Fluids* **6**, 064609 (2021).
- [52] E. N. A. Hoffman, J. M. Rodriguez, S. M. Cottier, C. S. Combs, B. F. Bathel, J. M. Weisberger, S. B. Jones, J. D. Schmisser, and P. A. Kreth, Modal analysis of cylinder-induced transitional shock-wave/boundary-layer interaction unsteadiness, *AIAA Journal accepted for publication*, 1 (2022).
- [53] L. Sirovich, Turbulence and the dynamics of coherent structures. part I: Coherent structures, *Quarterly of Applied Mathematics* **45**, 561 (1986).
- [54] M. Sieber, C. O. Paschereit, and K. Oberleithner, Spectral proper orthogonal decomposition, *Journal of Fluid Mechanics* **792**, 798–828 (2016).
- [55] M. Sieber, C. O. Paschereit, and K. Oberleithner, On the nature of spectral proper orthogonal decomposition and related modal decompositions (2017), arXiv:1712.08054 [physics.flu-dyn].
- [56] J. H. M. Ribeiro and W. R. Wolf, Identification of coherent structures in the flow past a NACA0012 airfoil via proper orthogonal decomposition, *Physics of Fluids* **29**, 085104 (2017).
- [57] Z. Liu, J. Braun, and G. Paniagua, Characterization of a Supersonic Turbine Downstream of a Rotating Detonation Combustor, *Journal of Engineering for Gas Turbines and Power* **141**, 10.1115/1.4040815 (2018).
- [58] H. Lui, W. Wolf, J. Braun, I. Rahbari, and G. Paniagua, Numerical simulations of supersonic stator cascades: Assessment of LES and RANS calculations, in *AIAA Aviation 2021 Forum*.
- [59] T. Poinsot and S. Lele, Boundary conditions for direct simulations of compressible viscous flows, *Journal of Computational Physics* **101**, 104 (1992).
- [60] M. Israeli and S. A. Orszag, Approximation of radiation boundary conditions, *Journal of Computational Physics* **41**, 115 (1981).
- [61] N. J. Georgiadis, D. P. Rizzetta, and C. Fureby, Large-eddy simulation: Current capabilities, recommended practices, and future research, *AIAA Journal* **48**, 1772 (2010).

- [62] M. S. Loginov, N. A. Adams, and A. A. Zheltovodov, Large-eddy simulation of shock-wave/turbulent-boundary-layer interaction, *Journal of Fluid Mechanics* **565**, 135–169 (2006).
- [63] J. Anderson, *Modern Compressible Flow: With Historical Perspective*, Aeronautical and Aerospace Engineering Series (McGraw-Hill Education, 2003).
- [64] J. Mattheis and S. Hickel, On the transition between regular and irregular shock patterns of shock-wave/boundary-layer interactions, *Journal of Fluid Mechanics* **776**, 200–234 (2015).
- [65] J. Fang, A. A. Zheltovodov, Y. Yao, C. Moulinec, and D. R. Emerson, On the turbulence amplification in shock-wave/turbulent boundary layer interaction, *Journal of Fluid Mechanics* **897**, A32 (2020).
- [66] A. Hartmann, A. Feldhusen, and W. Schröder, On the interaction of shock waves and sound waves in transonic buffet flow, *Physics of Fluids* **25**, 026101 (2013).
- [67] J. Klinner, A. Herdt, S. Grund, and C. Willert, High-speed PIV of shock boundary layer interactions in the transonic buffet flow of a compressor cascade, *Experiments in Fluids* **62** (2021).
- [68] J. Towns, T. Cockerill, M. Dahan, I. Foster, K. Gaither, A. Grimshaw, V. Hazlewood, S. Lathrop, D. Lifka, G. D. Peterson, R. Roskies, J. R. Scott, and N. Wilkins-Diehr, XSEDE: Accelerating scientific discovery, *Computing in Science & Engineering* **16**, 62 (2014).