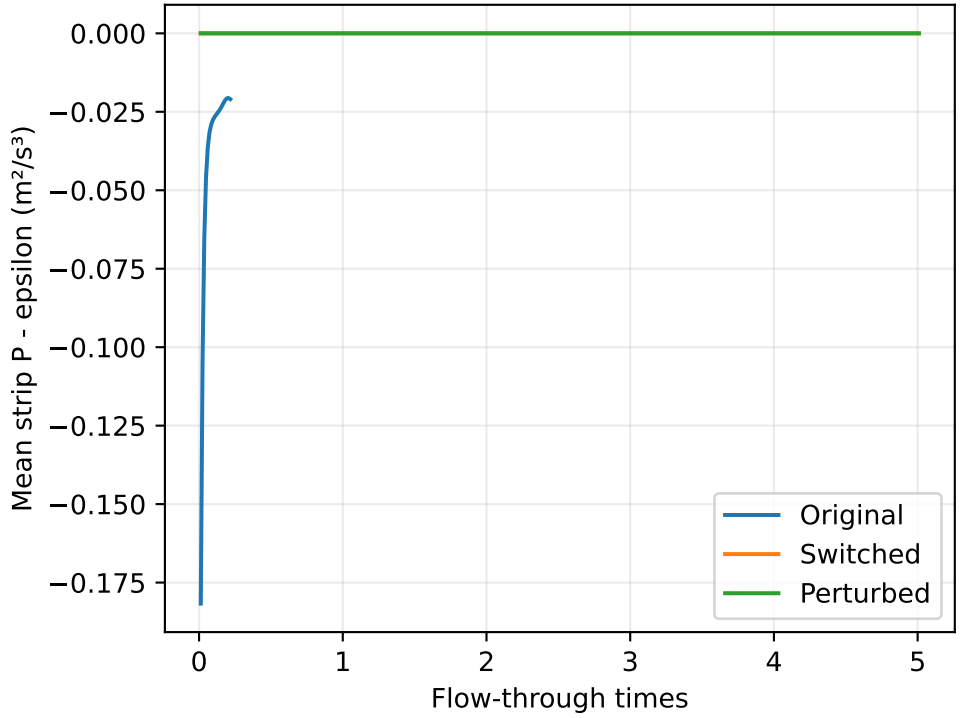
0.000
−0.025
−0.050
−0.075
−0.100
−0.125
−0.150
−0.175
Mean strip P - epsilon (m²/s³)
0
1
2
3
4
5
Flow-through times
Original
Switched
Perturbed

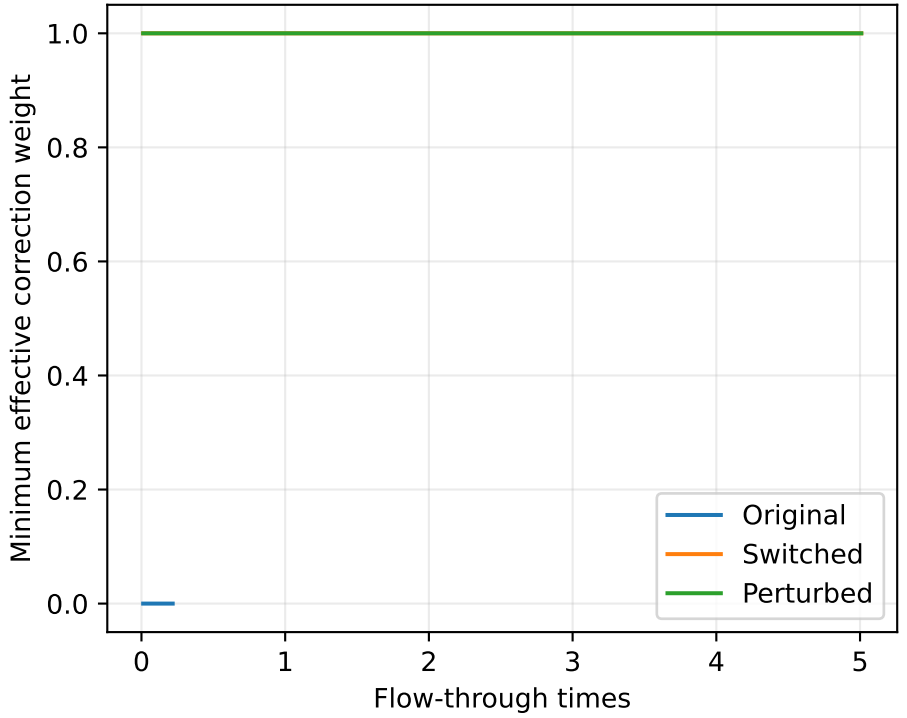
1.0
0.8
0.6
0.4
0.2
0.0
Minimum effective correction weight
0
1
2
3
4
5
Flow-through times
Original
Switched
Perturbed