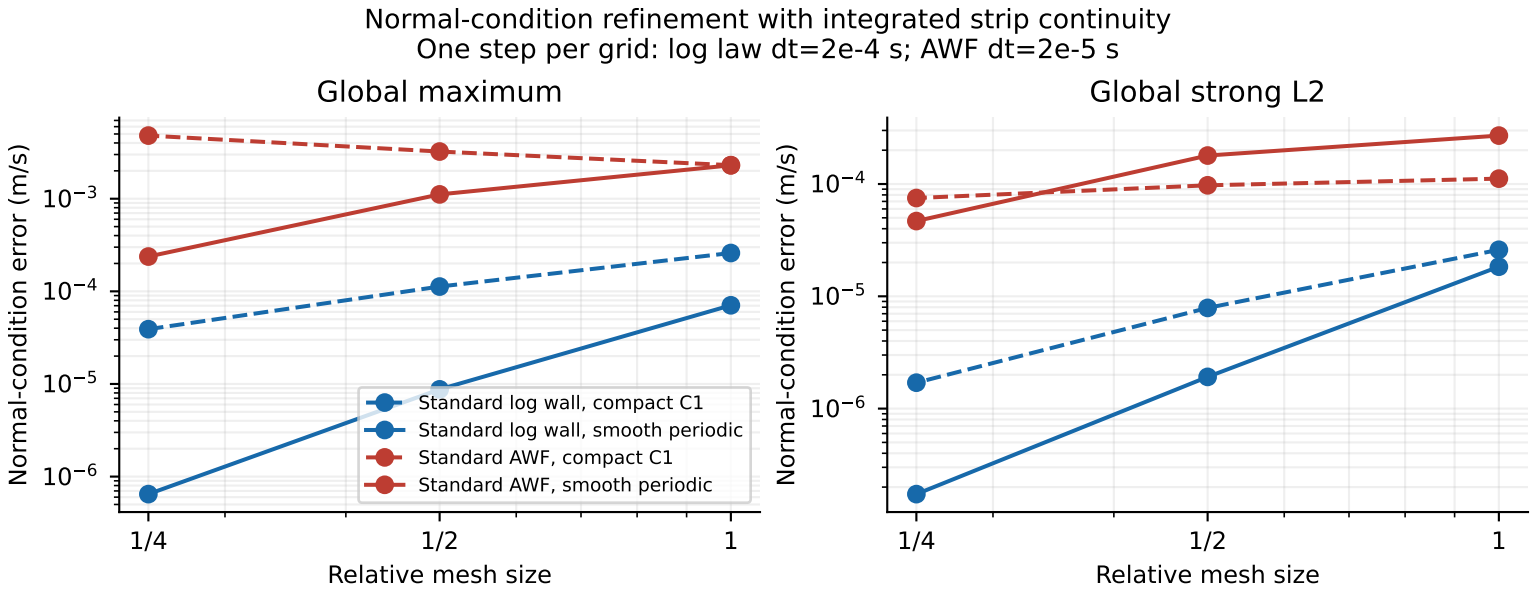
Normal-condition refinement with integrated strip continuity
One step per grid: log law dt=2e-4 s; AWF dt=2e-5 s
Global maximum
Global strong L2
Normal-condition error (m/s)
10^{-3}
10^{-4}
10^{-5}
10^{-6}
Standard log wall, compact C1
Standard log wall, smooth periodic
Standard AWF, compact C1
Standard AWF, smooth periodic
1/4
1/2
1
Relative mesh size