


In v0033 revision, every time we update non-connected adv packet, we will do three times logic. But not every time we update data, it will send. When we check power value and get TH value it will update non_connected adv packet. However, the time get TH value and check power value is not at the same time. So in v0033, it may occur that we update several times non-connect adv packet, but only send once.

TH: Temperature and humidity

V0033

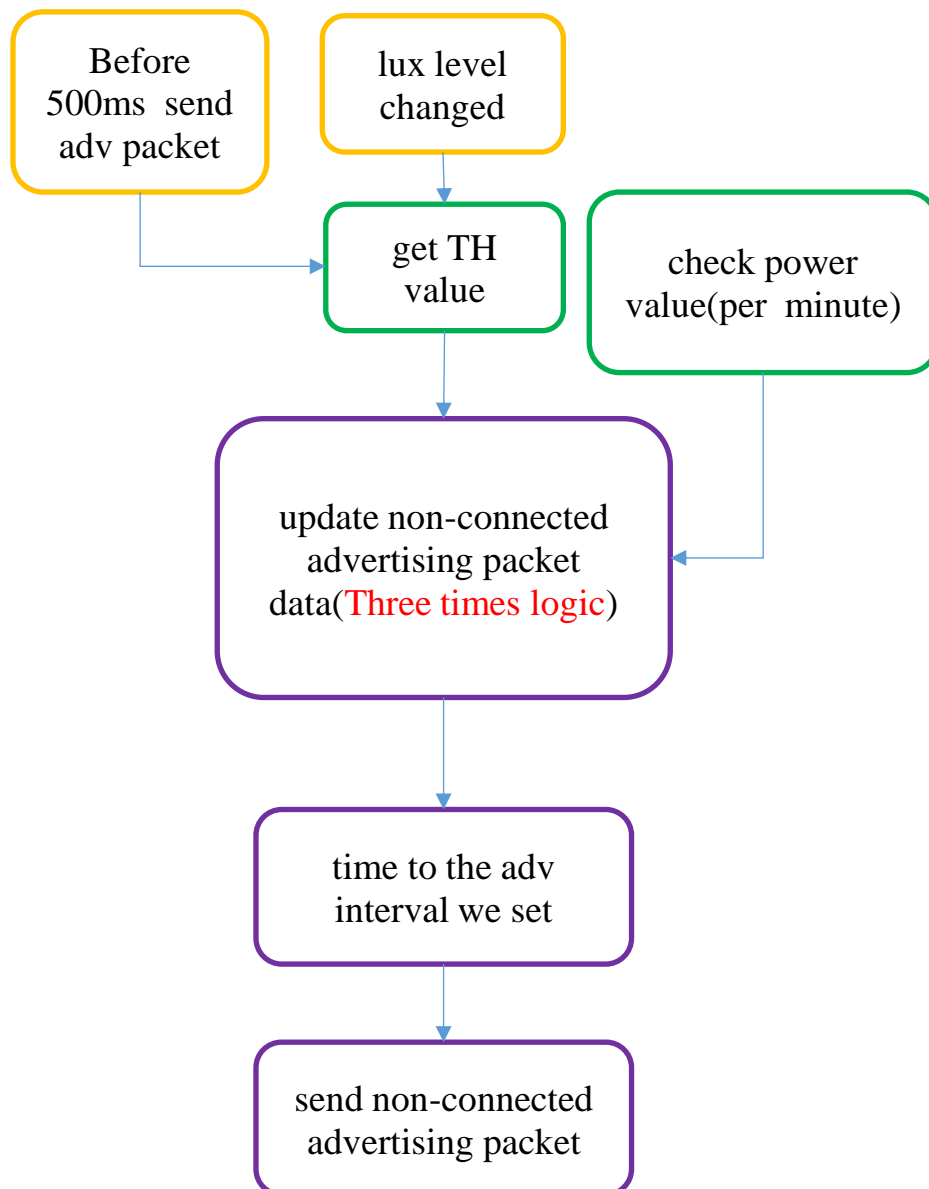

Because of the reason as shown earlier, we decided to take the three times logic in get TH value function. Only every time we get TH value, we do the three times logic. There are two places to get TH value. Before 500ms when send non-connected adv packet and when lux level change, it will change the adv interval, and get TH value right away.

Next revision

