

1. Description

1.1. Project

| Project Name | F439_CPP_SNTP_Example_01 |
|-----------------|--------------------------|
| Board Name | NUCLEO-F439ZI |
| Generated with: | STM32CubeMX 6.11.1 |
| Date | 03/16/2025 |


1.2. MCU

| MCU Series | STM32F4 |
|----------------|---------------|
| MCU Line | STM32F429/439 |
| MCU name | STM32F439ZITx |
| MCU Package | LQFP144 |
| MCU Pin number | 144 |

1.3. Core(s) information

| Core(s) | Arm Cortex-M4 |
|---------|---------------|

2. Pinout Configuration

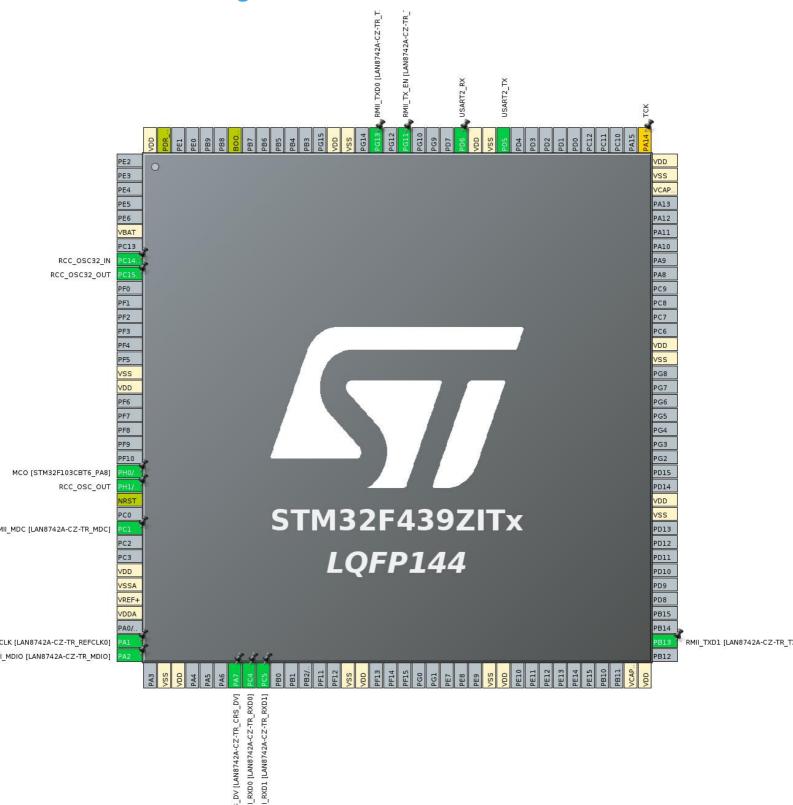


3. Pins Configuration

| Pin Number LQFP144 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|--|
| 6 | VBAT | Power | | |
| 8 | PC14/OSC32_IN | I/O | RCC_OSC32_IN | |
| 9 | PC15/OSC32_OUT | I/O | RCC_OSC32_OUT | |
| 16 | VSS | Power | | |
| 17 | VDD | Power | | |
| 23 | PH0/OSC_IN | I/O | RCC_OSC_IN | MCO [STM32F103CBT6_PA8] |
| 24 | PH1/OSC_OUT | I/O | RCC_OSC_OUT | |
| 25 | NRST | Reset | | |
| 27 | PC1 | I/O | ETH_MDC | RMII_MDC [LAN8742A-CZ- TR_MDC] |
| 30 | VDD | Power | | |
| 31 | VSSA | Power | | |
| 32 | VREF+ | Power | | |
| 33 | VDDA | Power | | |
| 35 | PA1 | I/O | ETH_REF_CLK | RMII_REF_CLK [LAN8742A-CZ- TR_REFCLK0] |
| 36 | PA2 | I/O | ETH_MDIO | RMII_MDIO [LAN8742A-CZ- TR_MDIO] |
| 38 | VSS | Power | | |
| 39 | VDD | Power | | |
| 43 | PA7 | I/O | ETH_CRS_DV | RMII_CRS_DV [LAN8742A- CZ-TR_CRS_DV] |
| 44 | PC4 | I/O | ETH_RXD0 | RMII_RXD0 [LAN8742A-CZ- TR_RXD0] |
| 45 | PC5 | I/O | ETH_RXD1 | RMII_RXD1 [LAN8742A-CZ- TR_RXD1] |
| 51 | VSS | Power | | |
| 52 | VDD | Power | | |
| 61 | VSS | Power | | |
| 62 | VDD | Power | | |
| 71 | VCAP_1 | Power | | |
| 72 | VDD | Power | | |
| 74 | PB13 | I/O | ETH_TXD1 | RMII_TXD1 [LAN8742A-CZ- TR_TXD1] |
| 83 | VSS | Power | | |
| | | | | |

| Pin Number LQFP144 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|--------------------------------------|
| 84 | VDD | Power | | |
| 94 | VSS | Power | | |
| 95 | VDD | Power | | |
| 106 | VCAP_2 | Power | | |
| 107 | VSS | Power | | |
| 108 | VDD | Power | | |
| 109 | PA14 * | I/O | SYS_JTCK-SWCLK | TCK |
| 119 | PD5 | I/O | USART2_TX | |
| 120 | VSS | Power | | |
| 121 | VDD | Power | | |
| 122 | PD6 | I/O | USART2_RX | |
| 126 | PG11 | I/O | ETH_TX_EN | RMII_TX_EN [LAN8742A- CZ-TR_TXEN] |
| 128 | PG13 | I/O | ETH_TXD0 | RMII_TXD0 [LAN8742A-CZ- TR_TXD0] |
| 130 | VSS | Power | | |
| 131 | VDD | Power | | |
| 138 | воото | Boot | | |
| 143 | PDR_ON | Reset | | |
| 144 | VDD | Power | | |

^{*} The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

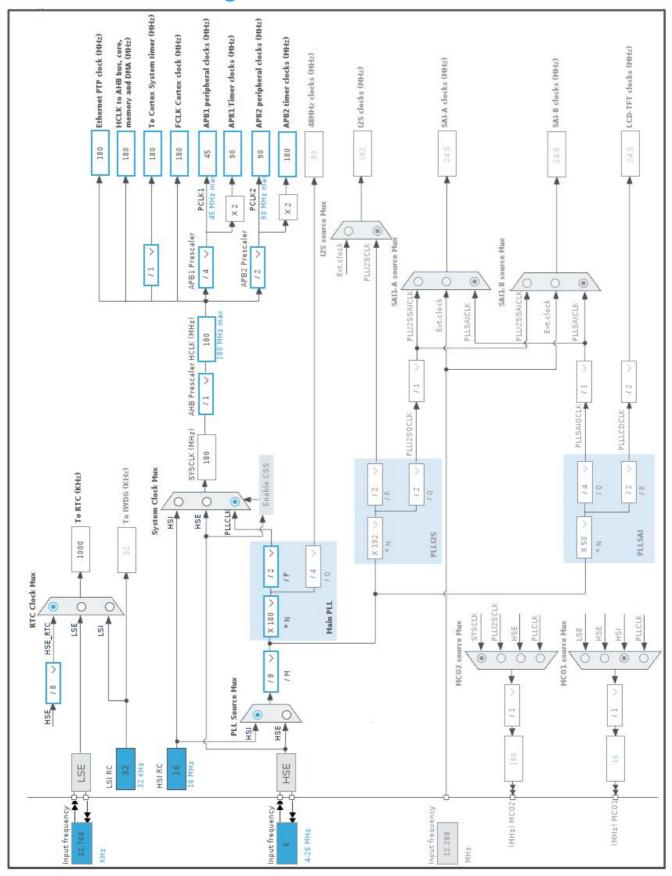

5. Software Project

5.1. Project Settings

| Name | Value |
|-----------------------------------|--|
| Project Name | F439_CPP_SNTP_Example_01 |
| Project Folder | /home/johng/STM32CubeIDE/workspace_1.15.5/F439_CPP_SNTP_Example_01 |
| Toolchain / IDE | STM32CubelDE |
| Firmware Package Name and Version | STM32Cube FW_F4 V1.28.1 |
| Application Structure | Advanced |
| Generate Under Root | Yes |
| Do not generate the main() | No |
| Minimum Heap Size | 0x200 |
| Minimum Stack Size | 0x400 |

5.2. Code Generation Settings

| Name | Value |
|---|---------------------------------------|
| STM32Cube MCU packages and embedded software | Copy only the necessary library files |
| Generate peripheral initialization as a pair of '.c/.h' files | No |
| Backup previously generated files when re-generating | No |
| Keep User Code when re-generating | Yes |
| Delete previously generated files when not re-generated | Yes |
| Set all free pins as analog (to optimize the power | No |
| consumption) | |
| Enable Full Assert | Yes |

5.3. Advanced Settings - Generated Function Calls

| Rank | Function Name | Peripheral Instance Name |
|------|---------------------|--------------------------|
| 1 | SystemClock_Config | RCC |
| 2 | MX_GPIO_Init | GPIO |
| 3 | MX_USART2_UART_Init | USART2 |
| 4 | MX_LWIP_Init | LWIP |
| 5 | MX_RTC_Init | RTC |

1. Power Consumption Calculator report

1.1. Microcontroller Selection

| Series | STM32F4 |
|-----------|---------------|
| Line | STM32F429/439 |
| MCU | STM32F439ZITx |
| Datasheet | DS9484_Rev10 |

1.2. Parameter Selection

| Temperature | 25 |
|-------------|-----|
| Vdd | 3.3 |

1.3. Battery Selection

| Battery | Li-SOCL2(A3400) |
|-------------------|-----------------|
| Capacity | 3400.0 mAh |
| Self Discharge | 0.08 %/month |
| Nominal Voltage | 3.6 V |
| Max Cont Current | 100.0 mA |
| Max Pulse Current | 200.0 mA |
| Cells in series | 1 |
| Cells in parallel | 1 |


1.4. Sequence

| C4am | Ct 4 | Ct O |
|------------------------|-------------|---------------------------|
| Step | Step1 | Step2 |
| Mode | RUN | STOP UDM (Under Drive) |
| Vdd | 3.3 | 3.3 |
| Voltage Source | Battery | Battery |
| Range | Scale1-High | No Scale |
| Fetch Type | FLASH | n/a |
| CPU Frequency | 180 MHz | 0 Hz |
| Clock Configuration | HSE PLL | Regulator LP Flash-PwrDwn |
| Clock Source Frequency | 4 MHz | 0 Hz |
| Peripherals | | |
| Additional Cons. | 0 mA | 0 mA |
| Average Current | 57 mA | 100 μΑ |
| Duration | 0.1 ms | 0.9 ms |
| DMIPS | 225.0 | 0.0 |
| Ta Max | 97.48 | 104.99 |
| Category | In DS Table | In DS Table |

1.5. Results

| Sequence Time | 1 ms | Average Current | 5.79 mA |
|---------------|-------------------|-----------------|-------------|
| Battery Life | 24 days, 10 hours | Average DMIPS | 225.0 DMIPS |

1.6. Chart

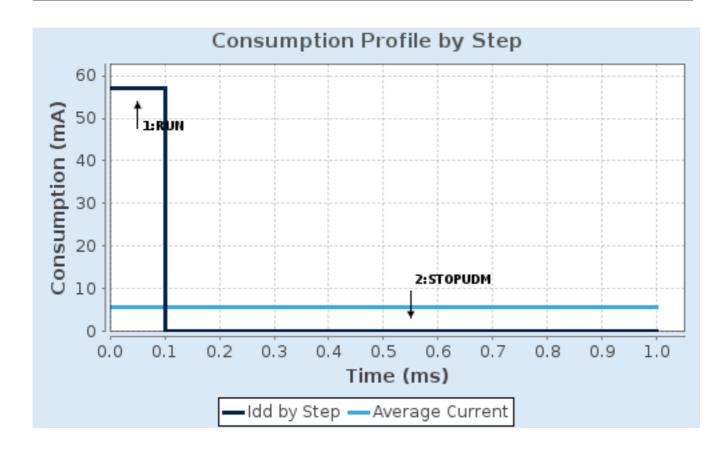

2. Peripherals and Middlewares Configuration

2.1. ETH

Mode: RMII

2.1.1. Parameter Settings:

General: Ethernet Configuration:

Note PHY Driver must be configured from the LwIP 'Platform Settings' top right tab

Ethernet MAC Address **00:80:E1:00:00:20** *

Rx Buffers Length 1536

Ethernet Basic Configuration:

Rx Mode Interrupt Mode

2.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator Low Speed Clock (LSE): Crystal/Ceramic Resonator

2.2.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3
Instruction Cache Enabled
Prefetch Buffer Enabled
Data Cache Enabled

Flash Latency(WS) 5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value 16
TIM Prescaler Selection Disabled
HSE Startup Timout Value (ms) 100
LSE Startup Timout Value (ms) 5000

Power Parameters:

Power Regulator Voltage Scale Power Regulator Voltage Scale 1

Power Over Drive Enabled

2.3. RTC

mode: Activate Clock Source mode: Activate Calendar

2.3.1. Parameter Settings:

General:

Hour Format Hourformat 24
Asynchronous Predivider value 125-1 *
Synchronous Predivider value 8000-1 *

Calendar Time:

Data Format Binary data format *

 Hours
 0

 Minutes
 0

 Seconds
 0

Day Light Saving: value of hour adjustment

Store Operation

Daylightsaving None

Storeoperation Reset

Calendar Date:

Week DayMondayMonthJanuaryDate1Year0

2.4. SYS

Timebase Source: TIM6

2.5. **USART2**

Mode: Asynchronous

2.5.1. Parameter Settings:

Basic Parameters:

Baud Rate 19200 *

Word Length 8 Bits (including Parity)

Parity None Stop Bits 1

Advanced Parameters:

Data Direction Receive and Transmit

Over Sampling 16 Samples

2.6. FREERTOS

Interface: CMSIS_V2

2.6.1. Config parameters:

API:

FreeRTOS API CMSIS v2

Versions:

FreeRTOS version 10.3.1 CMSIS-RTOS version 2.00

MPU/FPU:

ENABLE_MPU Disabled
ENABLE_FPU Enabled *

Kernel settings:

USE_PREEMPTION Enabled

CPU_CLOCK_HZ SystemCoreClock

TICK_RATE_HZ 1000

MAX_PRIORITIES 56

MINIMAL_STACK_SIZE 256 *

MAX_TASK_NAME_LEN 16

USE_16_BIT_TICKS Disabled

IDLE_SHOULD_YIELD Enabled

USE_MUTEXES Enabled

USE_RECURSIVE_MUTEXES Enabled

USE_COUNTING_SEMAPHORES Enabled

QUEUE_REGISTRY_SIZE 8

USE_APPLICATION_TASK_TAG Disabled
ENABLE_BACKWARD_COMPATIBILITY Enabled
USE_PORT_OPTIMISED_TASK_SELECTION Disabled
USE_TICKLESS_IDLE Disabled
USE_TASK_NOTIFICATIONS Enabled
RECORD_STACK_HIGH_ADDRESS Disabled

Memory management settings:

Memory Allocation Dynamic / Static

TOTAL_HEAP_SIZE 16384 *

Memory Management scheme heap_4

Hook function related definitions:

USE_IDLE_HOOK Disabled
USE_TICK_HOOK Disabled
USE_MALLOC_FAILED_HOOK Disabled
USE_DAEMON_TASK_STARTUP_HOOK Disabled

CHECK_FOR_STACK_OVERFLOW Option2 *

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS Disabled
USE_TRACE_FACILITY Enabled
USE_STATS_FORMATTING_FUNCTIONS Disabled

Co-routine related definitions:

USE_CO_ROUTINES Disabled MAX_CO_ROUTINE_PRIORITIES 2

Software timer definitions:

USE_TIMERS Enabled
TIMER_TASK_PRIORITY 2
TIMER_QUEUE_LENGTH 10
TIMER_TASK_STACK_DEPTH 512

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY 15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY 5

Added with 10.2.1 support:

MESSAGE_BUFFER_LENGTH_TYPE size_t
USE_POSIX_ERRNO Disabled

CMSIS-RTOS V2 flags:

USE_OS2_THREAD_SUSPEND_RESUME Enabled
USE_OS2_THREAD_ENUMERATE Enabled
USE_OS2_EVENTFLAGS_FROM_ISR Enabled
USE_OS2_THREAD_FLAGS Enabled
USE_OS2_TIMER Enabled
USE_OS2_MUTEX Enabled

2.6.2. Include parameters:

Include definitions:

Enabled vTaskPrioritySet Enabled uxTaskPriorityGet Enabled vTaskDelete vTaskCleanUpResources Disabled vTaskSuspend Enabled vTaskDelayUntil Enabled vTaskDelay Enabled xTaskGetSchedulerState Enabled Enabled xTaskResumeFromISR xQueueGetMutexHolder Enabled Disabled xSemaphoreGetMutexHolder

| pcTaskGetTaskName | Disabled |
|------------------------------|----------|
| uxTaskGetStackHighWaterMark | Enabled |
| xTaskGetCurrentTaskHandle | Enabled |
| eTaskGetState | Enabled |
| xEventGroupSetBitFromISR | Disabled |
| xTimerPendFunctionCall | Enabled |
| xTaskAbortDelay | Disabled |
| xTaskGetHandle | Disabled |
| uxTaskGetStackHighWaterMark2 | Disabled |

2.6.3. Advanced settings:

Newlib settings (see parameter description first):

USE_NEWLIB_REENTRANT Enabled *

Project settings (see parameter description first):

Use FW pack heap file Enabled

2.7. LWIP

mode: Enabled

Advanced parameters are not listed except if modified by user.

2.7.1. General Settings:

LwIP Version:

LwIP Version (Version of LwIP supported by CubeMX ** CubeMX specific **) 2.1.2

IPv4 - DHCP Options:

LWIP_DHCP (DHCP Module) Enabled

RTOS Dependency:

WITH_RTOS (Use FREERTOS ** CubeMX specific **)

CMSIS_VERSION (CMSIS API Version used)

RTOS_USE_NEWLIB_REENTRANT (RTOS used - 1)

Enabled

Platform Settings:

PHY Driver Choose/LAN8742/DP83848

Protocols Options:

 LWIP_ICMP (ICMP Module Activation)
 Enabled

 LWIP_IGMP (IGMP Module)
 Disabled

 LWIP_DNS (DNS Module)
 Enabled *

 LWIP_UDP (UDP Module)
 Enabled

 MEMP_NUM_UDP_PCB (Number of UDP Connections)
 4

| LWIP_TCP (TCP Module) | Enabled |
|---|-----------------|
| MEMP_NUM_TCP_PCB (Number of TCP Connections) | 5 |
| | |
| 2.7.2. Key Options: | |
| | |
| Infrastructure - OS Awarness Option: | |
| NO_SYS (OS Awarness) | OS Used |
| Infrastructure - Timers Options: | |
| LWIP_TIMERS (Use Support For sys_timeout) | Enabled |
| Infrastructure - Core Locking and MPU Options: | |
| SYS_LIGHTWEIGHT_PROT (Memory Functions Protection) | Enabled |
| Infrastructure - Heap and Memory Pools Options: | |
| MEM_SIZE (Heap Memory Size) | 10 * 1024 * |
| Infrastructure - Internal Memory Pool Sizes: | |
| MEMP_NUM_PBUF (Number of Memory Pool struct Pbufs) | 16 |
| MEMP_NUM_RAW_PCB (Number of Raw Protocol Control Blocks) | 4 |
| MEMP_NUM_TCP_PCB_LISTEN (Number of Listening TCP Connections) | 8 |
| MEMP_NUM_TCP_SEG (Number of TCP Segments simultaneously queued) | 16 |
| MEMP_NUM_LOCALHOSTLIST (Number of Host Entries in the Local Host List) | 1 |
| Pbuf Options: | |
| PBUF_POOL_SIZE (Number of Buffers in the Pbuf Pool) | 16 |
| PBUF_POOL_BUFSIZE (Size of each pbuf in the pbuf pool) | 592 |
| IPv4 - ARP Options: | |
| LWIP_ARP (ARP Functionality) | Enabled |
| Callback - TCP Options: | |
| TCP_TTL (Number of Time-To-Live Used by TCP Packets) | 255 |
| TCP_WND (TCP Receive Window Maximum Size) | 2144 |
| TCP_QUEUE_OOSEQ (Allow Out-Of-Order Incoming Packets) | Enabled |
| LWIP_TCP_SACK_OUT (Allow Sending Selective Acknowledgements) | Disabled |
| TCP_MSS (Maximum Segment Size) | 536 |
| TCP_SND_BUF (TCP Sender Buffer Space) | 1072 |
| TCP_SND_QUEUELEN (Number of Packet Buffers Allowed for TCP Sender) | 9 |
| Network Interfaces Options: | |
| LWIP_NETIF_HOSTNAME (NETIF Hostname) | Enabled * |
| LWIP_NETIF_HOSTNAME_NAME (LWIP_NETIF_HOSTNAME_NAME (LWIP NETIF Hostname)) | Nuclro-F439zi * |
| LWIP_NETIF_STATUS_CALLBACK (Callback Function on Interface Status Changes) | Disabled |
| LWIP_NETIF_EXT_STATUS_CALLBACK (Extended Callback Function for several netif) | Disabled |
| LWIP_NETIF_LINK_CALLBACK (Callback Function on Interface Link Changes) | Enabled |

NETIF - Loopback Interface Options:

| LWIP_NETIF_LOOPBACK (NETIF Loopback) | Disabled | | | | | |
|---|----------------|--|--|--|--|--|
| Infrastructure - Threading Options: | | | | | | |
| TCPIP_THREAD_NAME (TCPIP Thread Name) | "tcpip_thread" | | | | | |
| TCPIP_THREAD_STACKSIZE (TCPIP Thread Stack Size) | 1024 | | | | | |
| TCPIP_THREAD_PRIO (TCPIP Thread Priority Level) | 24 | | | | | |
| TCPIP_MBOX_SIZE (TCPIP Mailbox Size) | 6 | | | | | |
| DEFAULT_THREAD_NAME (Default LwIP Thread Name) | "IwIP" | | | | | |
| DEFAULT_THREAD_STACKSIZE (Default LwIP Thread Stack Size) | 1024 | | | | | |
| DEFAULT_THREAD_PRIO (Default LwIP Thread Priority Level) | 3 | | | | | |
| DEFAULT_RAW_RECVMBOX_SIZE (Default Mailbox Size on a NETCONN Raw) | 0 | | | | | |
| DEFAULT_TCP_RECVMBOX_SIZE (Default Mailbox Size on a NETCONN TCP) | 6 | | | | | |
| DEFAULT_ACCEPTMBOX_SIZE (Default Mailbox Size for Incoming Connections) | 6 | | | | | |
| Thread Safe APIs - Netconn Options: | | | | | | |
| LWIP_NETCONN (NETCONN API) | Enabled | | | | | |
| Thread Safe APIs - Socket Options: | | | | | | |
| LWIP_SOCKET (Socket API) | Enabled | | | | | |
| LWIP_COMPAT_SOCKETS (BSD-style Socket Functions Names) | 1 | | | | | |
| LWIP_SOCKET_OFFSET (Socket Offset Number) | 0 | | | | | |
| LWIP_SOCKET_SELECT (Select for Socket) | Enabled | | | | | |
| LWIP_SOCKET_POLL (Poll for Socket) | Enabled | | | | | |
| <u>2.7.3. PPP:</u> | | | | | | |
| PPP Options: | | | | | | |
| PPP_SUPPORT (PPP Module) | Disabled | | | | | |
| <u>2.7.4. IPv6:</u> | | | | | | |
| IPv6 Options: | | | | | | |
| LWIP_IPV6 (IPv6 Protocol) | Disabled | | | | | |
| 2.7.5. HTTPD: | | | | | | |
| 2.7.3.11111 D. | | | | | | |
| HTTPD Options: | | | | | | |
| LWIP_HTTPD (LwIP HTTPD Support ** CubeMX specific **) | Disabled | | | | | |
| 2.7.6. SNMP: | | | | | | |
| | | | | | | |

LWIP_SNMP (LwIP SNMP Agent)

Disabled

2.7.7. SNTP/SMTP:

SNTP Options:

LWIP_SNTP (LWIP SNTP Support ** CubeMX specific **)

SNTP_UPDATE_DELAY (SNTP Update Delay)

30000 *

SMTP Options:

LWIP_SMTP (LWIP SMTP Support ** CubeMX specific **)

Disabled

2.7.8. MDNS/TFTP:

MDNS Options:

LWIP_MDNS (Multicast DNS Support ** CubeMX specific **)

Disabled

TFTP Options:

LWIP_TFTP (TFTP Support ** CubeMX specific **)

Disabled

2.7.9. Perf/Checks:

Sanity Checks:

LWIP_DISABLE_TCP_SANITY_CHECKS (TCP Sanity Checks)

Disabled

LWIP_DISABLE_MEMP_SANITY_CHECKS (MEMP Sanity Checks)

Disabled

Performance Options:

LWIP_PERF (Performace Testing for LwIP)

Disabled

2.7.10. Statistics:

Debug - Statistics Options:

LWIP_STATS (Statictics Collection) Disabled

2.7.11. Checksum:

Infrastructure - Checksum Options:

CHECKSUM_BY_HARDWARE (Hardware Checksum ** CubeMX specific **)

LWIP_CHECKSUM_CTRL_PER_NETIF (Generate/Check Checksum per Netif)

CHECKSUM_GEN_IP (Generate Software Checksum for Outgoing IP Packets)

Disabled

CHECKSUM_GEN_UDP (Generate Software Checksum for Outgoing UDP Packets)

Disabled

CHECKSUM_GEN_TCP (Generate Software Checksum for Outgoing TCP Packets)

Disabled

| CHECKSUM_GEN_ICMP (Generate Software Checksum for Outgoing ICMP Packets) | Disabled |
|--|----------|
| CHECKSUM_GEN_ICMP6 (Generate Software Checksum for Outgoing ICMP6 Packets) | Disabled |
| CHECKSUM_CHECK_IP (Generate Software Checksum for Incoming IP Packets) | Disabled |
| CHECKSUM_CHECK_UDP (Generate Software Checksum for Incoming UDP Packets) | Disabled |
| CHECKSUM_CHECK_TCP (Generate Software Checksum for Incoming TCP Packets) | Disabled |
| CHECKSUM_CHECK_ICMP (Generate Software Checksum for Incoming ICMP Packets) | Disabled |
| CHECKSUM_CHECK_ICMP6 (Generate Software Checksum for Incoming ICMP6 Packets) | Disabled |

2.7.12. Debug:

LwIP Main Debugging Options:

LWIP_DBG_MIN_LEVEL (Minimum Level)

ΑII

2.7.13. Platform Settings:

Driver_PHY LAN8742

^{*} User modified value

3. System Configuration

3.1. GPIO configuration

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|-----------------------------|--------------------|--------------------|------------------------------|-----------------------------|--------------|--|
| ETH | PC1 | ETH_MDC | Alternate Function Push Pull | No pull-up and no pull-down | Very High | RMII_MDC [LAN8742A- CZ-TR_MDC] |
| | PA1 | ETH_REF_CLK | Alternate Function Push Pull | No pull-up and no pull-down | Very High | RMII_REF_CLK [LAN8742A-CZ- TR_REFCLK0] |
| | PA2 | ETH_MDIO | Alternate Function Push Pull | No pull-up and no pull-down | Very High | RMII_MDIO [LAN8742A- CZ-TR_MDIO] |
| | PA7 | ETH_CRS_DV | Alternate Function Push Pull | No pull-up and no pull-down | Very High | RMII_CRS_DV [LAN8742A-CZ- TR_CRS_DV] |
| | PC4 | ETH_RXD0 | Alternate Function Push Pull | No pull-up and no pull-down | Very High | RMII_RXD0 [LAN8742A- CZ-TR_RXD0] |
| | PC5 | ETH_RXD1 | Alternate Function Push Pull | No pull-up and no pull-down | Very High | RMII_RXD1 [LAN8742A- CZ-TR_RXD1] |
| | PB13 | ETH_TXD1 | Alternate Function Push Pull | No pull-up and no pull-down | Very High | RMII_TXD1 [LAN8742A- CZ-TR_TXD1] |
| | PG11 | ETH_TX_EN | Alternate Function Push Pull | No pull-up and no pull-down | Very High | RMII_TX_EN [LAN8742A- CZ-TR_TXEN] |
| | PG13 | ETH_TXD0 | Alternate Function Push Pull | No pull-up and no pull-down | Very High | RMII_TXD0 [LAN8742A- CZ-TR_TXD0] |
| RCC | PC14/OSC3 2_IN | RCC_OSC32_IN | n/a | n/a | n/a | |
| | PC15/OSC3 2_OUT | RCC_OSC32_O UT | n/a | n/a | n/a | |
| | PH0/OSC_I | RCC_OSC_IN | n/a | n/a | n/a | MCO [STM32F103CBT6_PA8] |
| | PH1/OSC_O UT | RCC_OSC_OUT | n/a | n/a | n/a | |
| USART2 | PD5 | USART2_TX | Alternate Function Push Pull | No pull-up and no pull-down | Very High | |
| | PD6 | USART2_RX | Alternate Function Push Pull | No pull-up and no pull-down | Very High | |
| Single Mapped Signals | PA14 | SYS_JTCK- SWCLK | n/a | n/a | n/a | TCK |

| oizi biii/ i ooiiiigai atioi | 3.2. | DMA | config | uration |
|------------------------------|------|------------|--------|---------|
|------------------------------|------|------------|--------|---------|

nothing configured in DMA service

3.3. NVIC configuration

3.3.1. NVIC

| Interrupt Table | Enable | Preenmption Priority | SubPriority | |
|--|--------|----------------------|-------------|--|
| Non maskable interrupt | true | 0 | 0 | |
| Hard fault interrupt | true | 0 | 0 | |
| Memory management fault | true | 0 | 0 | |
| Pre-fetch fault, memory access fault | true | 0 | 0 | |
| Undefined instruction or illegal state | true | 0 | 0 | |
| System service call via SWI instruction | true | 0 | 0 | |
| Debug monitor | true | 0 | 0 | |
| Pendable request for system service | true | 15 | 0 | |
| System tick timer | true | 15 | 0 | |
| TIM6 global interrupt, DAC1 and DAC2 underrun error interrupts | true | 15 | 0 | |
| Ethernet global interrupt | true 5 | | 0 | |
| PVD interrupt through EXTI line 16 | unused | | | |
| Flash global interrupt | unused | | | |
| RCC global interrupt | unused | | | |
| USART2 global interrupt | unused | | | |
| Ethernet wake-up interrupt through EXTI line 19 | unused | | | |
| FPU global interrupt | unused | | | |


3.3.2. NVIC Code generation

| Enabled interrupt Table | Select for init sequence ordering | Generate IRQ handler | Call HAL handler |
|--|-----------------------------------|-------------------------|------------------|
| Non maskable interrupt | false | true | false |
| Hard fault interrupt | false | true | false |
| Memory management fault | false | true | false |
| Pre-fetch fault, memory access fault | false | true | false |
| Undefined instruction or illegal state | false | true | false |
| System service call via SWI instruction | false | false | false |
| Debug monitor | false | true | false |
| Pendable request for system service | false | false | false |
| System tick timer | false | false | true |
| TIM6 global interrupt, DAC1 and DAC2 underrun error interrupts | false | true | true |
| Ethernet global interrupt | false | true | true |

* User modified value

4. System Views

- 4.1. Category view
- 4.1.1. Current

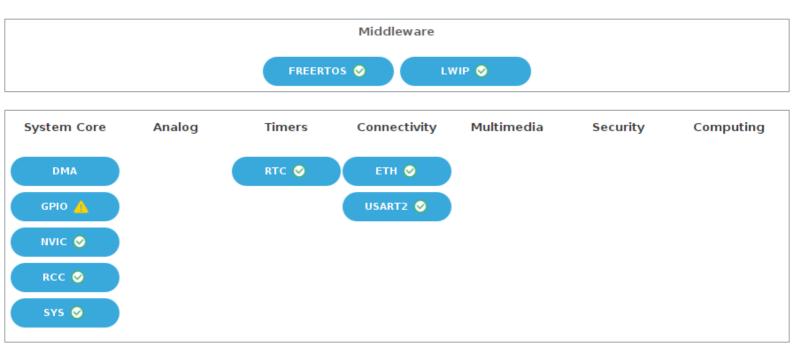

5. Docs & Resources

Type Link

BSDL files https://www.st.com/resource/en/bsdl_model/stm32f427-437_429-

439_bsdl.zip

IBIS models https://www.st.com/resource/en/ibis_model/stm32f427-437_429-

439_ibis.zip

System View https://www.st.com/resource/en/svd/stm32f4-svd.zip

Description

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_embedded_software_solutions.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_eval-

tools_portfolio.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_stm8_functi

onal-safety-packages.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_software_development_tools.pdf

Presentations https://www.st.com/resource/en/product_presentation/microcontrollers-

stm32-family-overview.pdf

Brochures https://www.st.com/resource/en/brochure/products-and-solutions-for-plcs-

and-smart-i-os.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32nucleo.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32trust.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32gui.pdf

Product https://www.st.com/resource/en/certification_document/stm32_authenticat

Certifications ion_can.pdf

Application Notes https://www.st.com/resource/en/application note/an1709-emc-design-

guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-stm32-

microcontroller-system-memory-boot-mode-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2945-stm8s-and-

stm32-mcus-a-consistent-832bit-product-line-for-painless-migration-

- stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3070-managing-the-driver-enable-signal-for-rs485-and-iolink-communications-with-the-stm32s-usart-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3154-can-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3997-audio-playback-and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3998-pdm-audio-software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4031-using-the-stm32f2-stm32f4-and-stm32f7-series-dma-controller-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4073-how-to-improve-adc-accuracy-when-using-stm32f2xx-and-stm32f4xx-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4488-getting-started-with-stm32f4xxxx-mcu-hardware-development-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4547-migrating-from-

- stm32f407xx417xx-to-stm32f427xx429xx437xx439xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4566-extending-the-dac-performance-of-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4640-peripherals-interconnections-on-stm32f4057xx-stm32f4157xx-stm32f42xxx-stm32f43xxx-stm32f446xx-and-stm32f469479xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4658-migration-of-applications-from-stm32f429439-lines-to-stm32f446-line-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4660-migration-of-microcontroller-applications-from-stm32f42xxxf43xxx-devices-to-stm32f7-series-devices-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4675-migration-of-microcontroller-applications-from-stm32f42xxxstm32f43xxx-to-stm32f469xxstm32f479xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-firmware-examples-for-stm32f4-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4850-stm32-mcusspreadspectrum-clock-generation-principles-properties-andimplementation-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4995-using-anelectromyogram-technique-to-detect-muscle-activitystmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5688-migrating-microcontroller-applications-from-stm32f427437-and-stm32f429439-to-stm32h573563-and-stm32h562-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adcoversampling-techniques-to-improve-signaltonoise-ratio-on-stm32-mcusstmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2867-guidelines-for-oscillator-design-on-stm8afals-and-stm32-mcusmpus-

- stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4861-introduction-to-lcdtft-display-controller-ltdc-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4908-getting-startedwith-usart-automatic-baud-rater-detection-for-stm32-mcusstmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2639-solderingrecommendations-and-package-information-for-leadfree-ecopack2-mcusand-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5020-introduction-to-digital-camera-interface-dcmi-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2656-stm32f10xxx-for related Tools | lcd-glass-driver-firmware-stmicroelectronics.pdf & Software
- Application Notes https://www.st.com/resource/en/application_note/an2790-tft-lcd-for related Tools interfacing-with-the-highdensity-stm32f10xxx-fsmc-stmicroelectronics.pdf & Software
- Application Notes https://www.st.com/resource/en/application_note/an3078-stm32-

for related Tools inapplication-programming-over-the-ic-bus-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3116-stm32s-adc-

for related Tools modes-and-their-applications-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3174-implementing-

for related Tools receivers-for-infrared-remote-control-protocols-using-stm32f10xxx-

& Software microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3241-qvga-tftlcd-

for related Tools direct-drive-using-the-stm32f10xx-fsmc-peripheral-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3307-guidelines-for-

for related Tools obtaining-iec-60335-class-b-certification-for-any-stm32-application-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3965-

for related Tools stm32f40xstm32f41x-inapplication-programming-using-the-usart-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3969-eeprom-

for related Tools emulation-in-stm32f40xstm32f41x-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3990-upgrading-

for related Tools stm32f4discovery-board-firmware-using-a-usb-key-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4044-floating-point-

for related Tools unit-demonstration-on-stm32-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4323-getting-started-

for related Tools with-stemwin-library-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4365-using-stm32f4-

for related Tools mcu-power-modes-with-best-dynamic-efficiency-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4435-guidelines-for-

for related Tools obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-

& Software application-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4457-implementing-for related Tools an-emulated-uart-on-stm32f4-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4499-stm32--

for related Tools nrf51822-bluetooth-low-energy-system-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4657-stm32-for related Tools inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4666-parallel-for related Tools synchronous-transmission-using-gpio-and-dma-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4678-full-duplex-spi-

for related Tools emulation-for-stm32f4-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4701-proprietary-for related Tools code-readout-protection-on-microcontrollers-of-the-stm32f4-series-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-

for related Tools firmware-examples-for-stm32f4-series-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4758-proprietary-for related Tools code-readout-protection-on-stm32l4-stm32l4-stm32g4-and-stm32wb-

& Software series-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4841-digital-signal-for related Tools processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4968-proprietary-for related Tools code-read-out-protection-pcrop-on-stm32f72xxx-and-stm32f73xxx-

& Software microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5056-integration-

for related Tools guide-for-the-xcubesbsfu-stm32cube-expansion-package-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5360-getting-started-

for related Tools with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5361-getting-started-

for related Tools with-projects-based-on-dualcore-stm32h7-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5394-getting-started-

for related Tools with-projects-based-on-the-stm32l5-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5418-how-to-build-a-for related Tools simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5426-migrating-

for related Tools graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-

& Software 550-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5464-position-control-

for related Tools of-a-threephase-permanent-magnet-motor-using-xcubemcsdk-or-

& Software xcubemcsdkful-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5564-getting-started-

for related Tools with-projects-based-on-dualcore-stm32wl-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5698-adapting-the-for related Tools xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-

& Software other-safety-standards-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5731-stm32cubemx-

for related Tools and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4502-stm32-

for related Tools smbuspmbus-expansion-package-for-stm32cube-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5952-how-to-use-

for related Tools cmake-in-stm32cubeide-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5054-how-to-perform-

for related Tools secure-programming-using-stm32cubeprogrammer-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an6179-how-to-

for related Tools integrate-the-stl-firmware-into-a-time-critical-user-application-

& Software stmicroelectronics.pdf

Errata Sheets https://www.st.com/resource/en/errata_sheet/es0206-stm32f427437-and-

stm32f429439-device-errata-stmicroelectronics.pdf

Datasheet https://www.st.com/resource/en/datasheet/dm00077036.pdf

Programming https://www.st.com/resource/en/programming_manual/pm0214-stm32-Manuals cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf

Reference https://www.st.com/resource/en/reference manual/rm0090-

Manuals stm32f405415-stm32f407417-stm32f427437-and-stm32f429439-

advanced-armbased-32bit-mcus-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn0516-overview-of-the-

& Articles stm32f0xf100xxf103xx-and-stm32f2xxf30xf4xx-mcus-pmsm-singledual-

foc-sdk-v40-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1163-description-of-

& Articles wlcsp-for-microcontrollers-and-recommendations-for-its-use-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-

& Articles shipping-media-for-stm32-microcontrollers-in-bga-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-

packages-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1433-reference-device-& Articles marking-schematics-for-stm32-microcontrollers-and-microprocessors-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-

& Articles tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-

stmicroelectronics.pdf