



AC/DC POWER SUPPLY

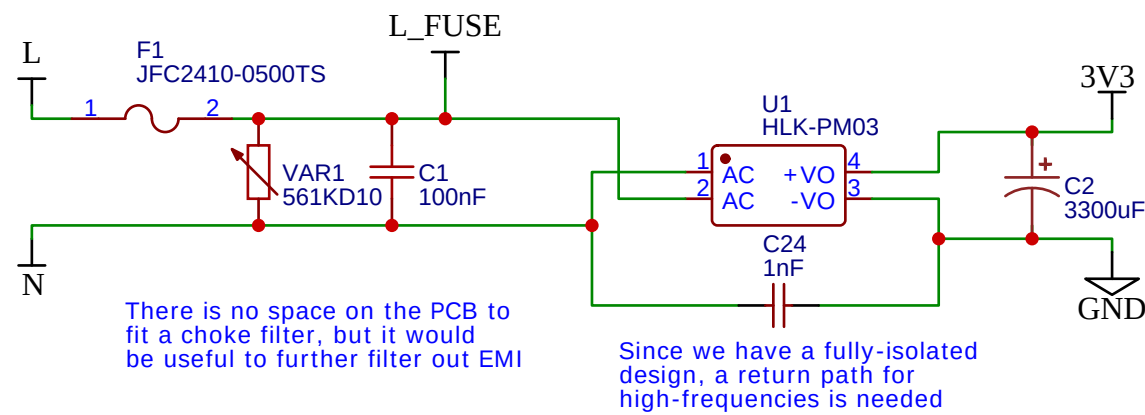


TITLE: Power supply		REV: 6.1
	Company: EnergyMe SRL	Sheet: 1/5
	Date: 2026-03-01 Drawn By: Jibril Sharafi	

MCU

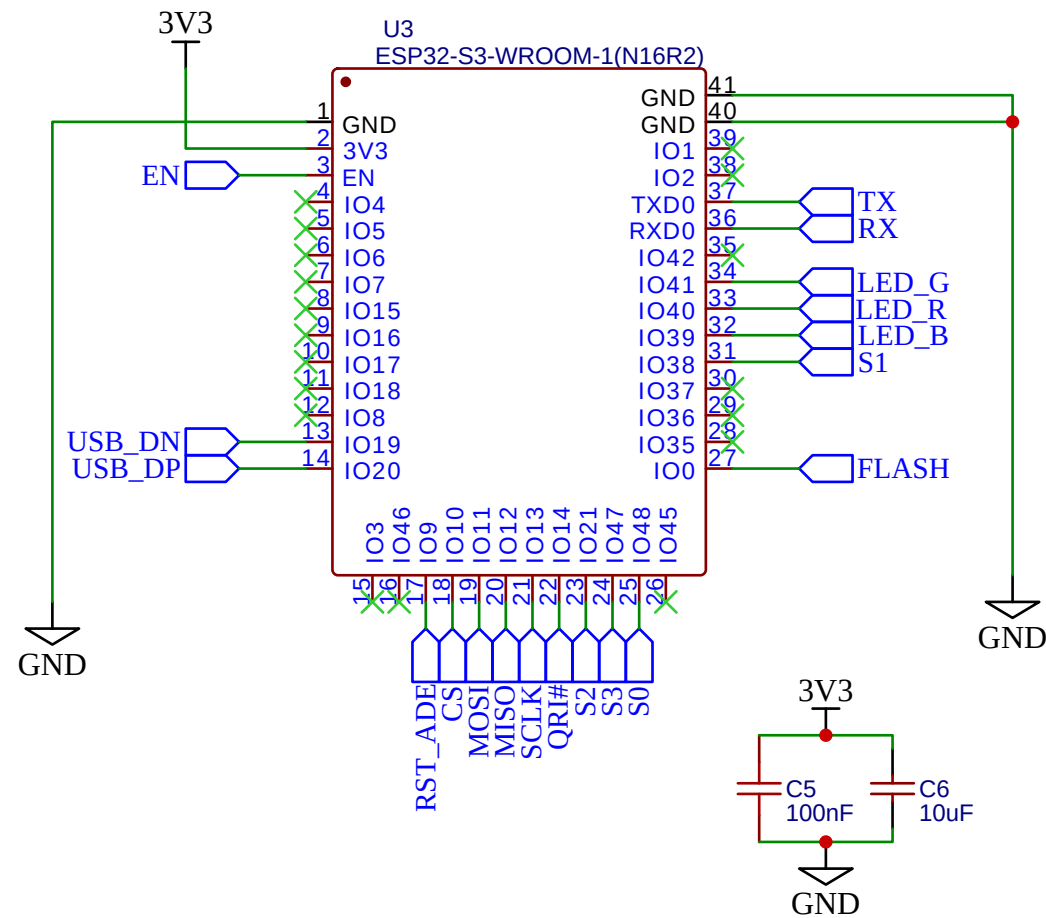


BUTTONS

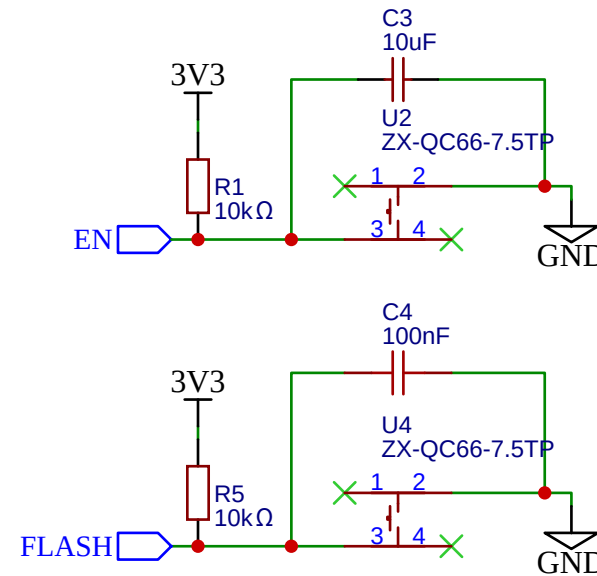


The capacitance of the FLASH pin should be lower than EN to allow the former to have a stable 3.3 V voltage before the latter. This ensures boots with no spurious download modes.

LED RGB

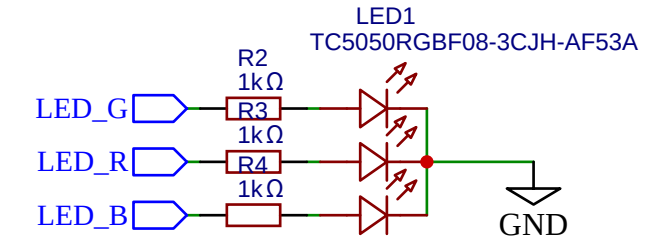


MULTIPLEXER

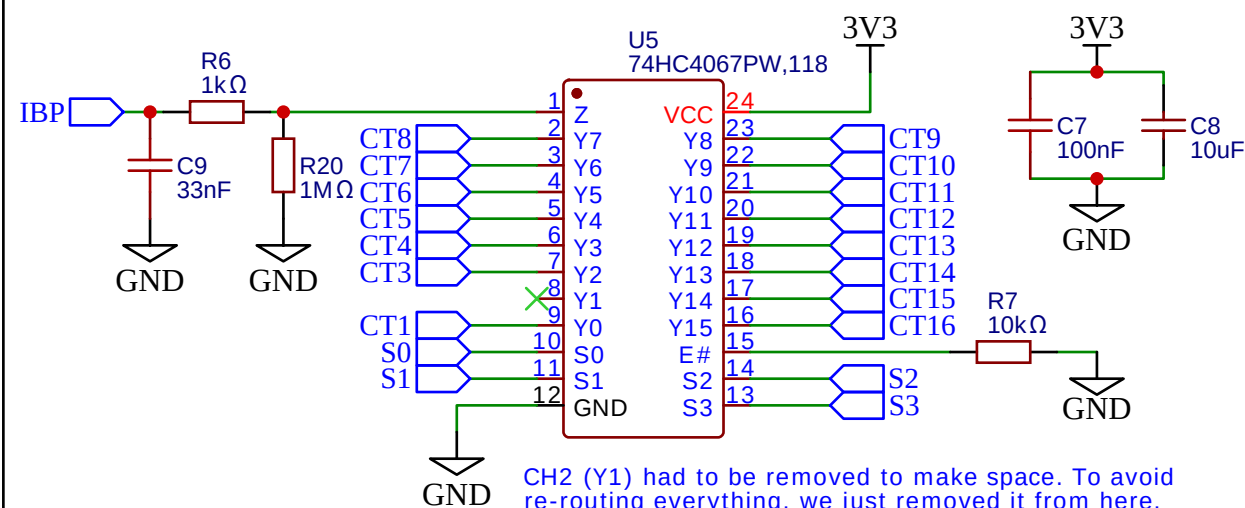


CH2 (Y1) had to be removed to make space. To avoid re-routing everything, we just removed it from here. The proper sequence/mapping will be handled in software.

TITLE: MCU/Multiplexer		REV: 6.1
Company: EnergyMe SRL		Sheet: 2/5
Date: 2026-03-01		Drawn By: Jibril Sharafi


TOP BOARD #1

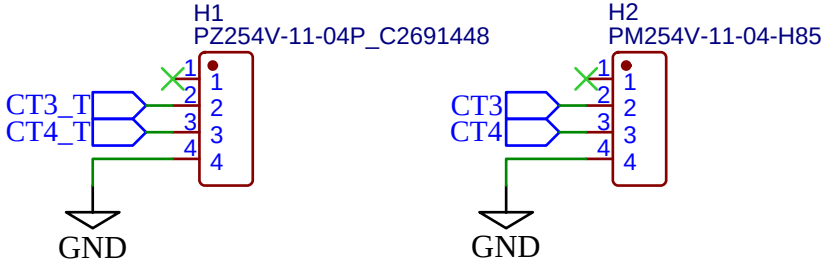


TOP BOARD #2

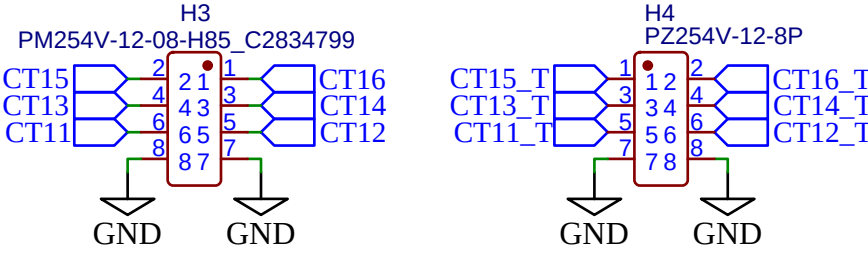

CT INPUT

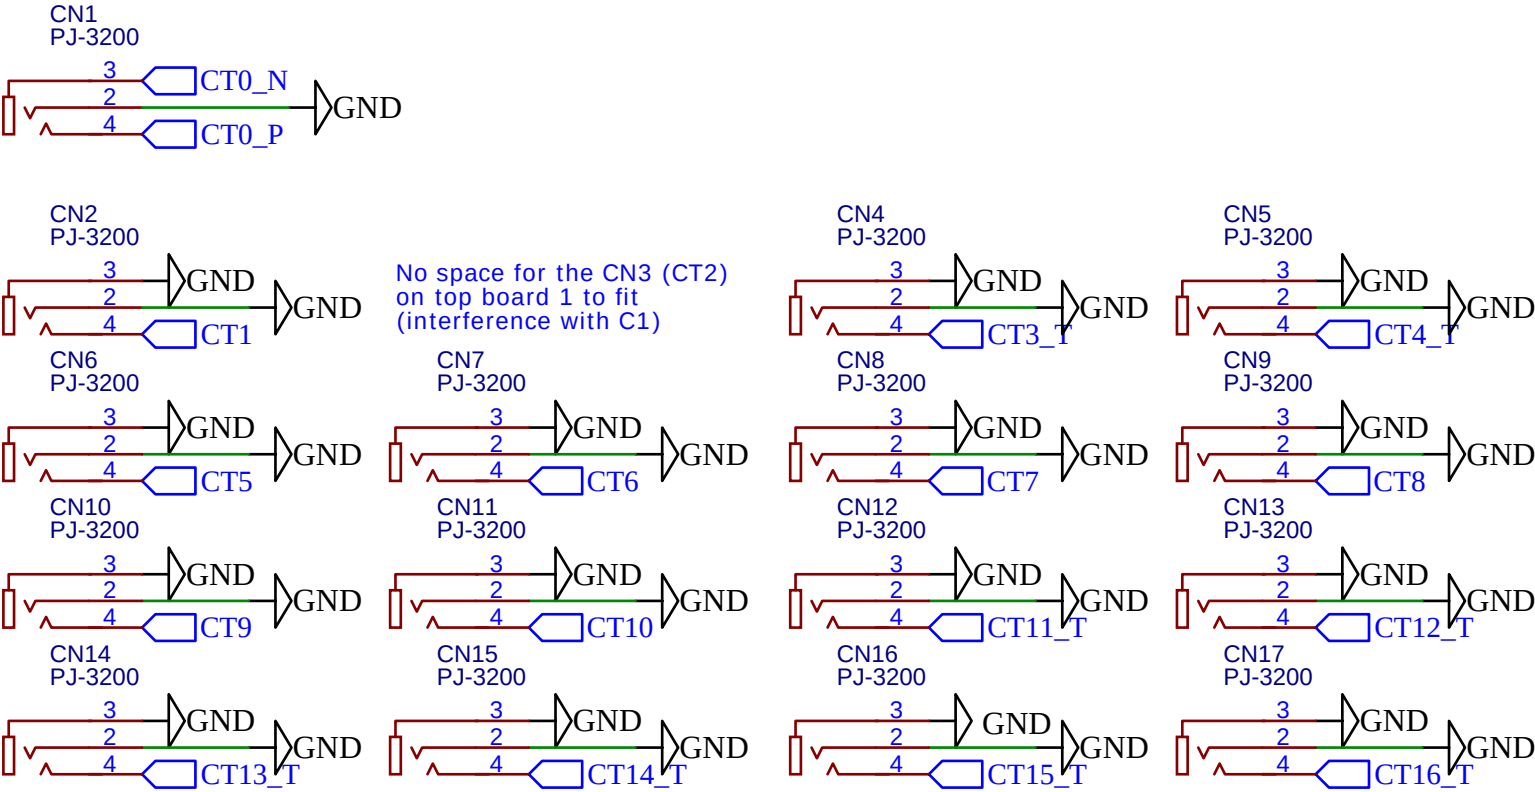

LINE VOLTAGE



PROGRAM

