Press Alignment Report

Fujifilm North America - Graphic Systems
Hanover Park

Epson 7900
G7Test NPD (Run-1)

Friday, August 04, 2017

This report shows G7 compliance but does not qualify the holder as a Master G7 print provider.
Version 2.0

© Fujifilm North America Corporation, Graphic Systems Division

Press Alignment Report

This report details a single measurement.

Project Description

Device	Epson 7900
Print Condition	G7Test NPD
Job:	aaaa1
Timestamp	6/8/2016
Location	Fujifilm North America - Graphic Systems - Hanover Park
Technician	

Print Condition

Print Target	Gracol 2006 320 gcrV4Z2VV
Substrate	dsg
Colorant	fdsg
RIP Settings	fdg
Metric Preset	G7 Grayscale

Measurement Setup

Measurement Device	i1-Sis
Serial Number	3141
∆E Type	ΔE
UV Mode	M0
Base Chart	P2P 300 iSis
Optimization Chart	P2P 300 iSis

Offset Printing Data


Ink Order	KCMY
Fountain Solution	
Blanket	
Blanket Age	
Screening	
Coating	

Notes

© Fujifilm North America Corporation, Graphic Systems Division


G7 Grayscale Metrics

Metric	Tol.	Actual
G7 Gray ΔCh Avg	1.50	4.58
G7 Gray ΔCh Max	3.00	6.28
Black ΔL Avg	1.50	1.72
Black ΔL Max	3.00	3.46
G7 Gray ΔL Avg	1.50	2.43
G7 Gray ΔL Max	3.00	4.69




G7 gray balance is a standardized scale of CMY percentages that should appear neutral to the eye relative to the paper, and can be calculated and measured in a* and b* values for each scale step. Red lines indicate tolerances.


Gray ΔCh

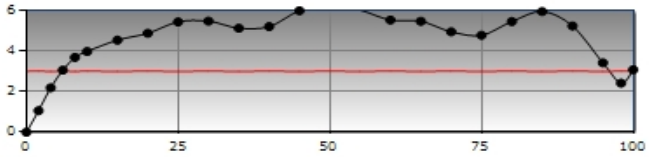

Black ΔL

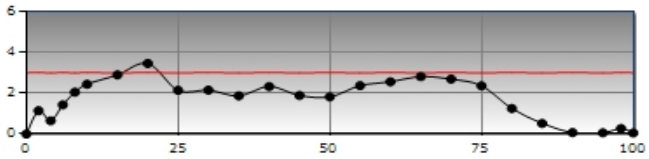


Gray ΔL

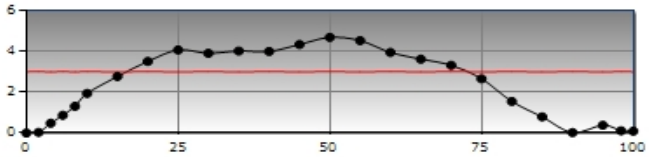

These three plots show weighted (blue) and non-weighted (black) values. The weighted values are required for Master G7 submissions, but non-weighted data can be more valuable for evaluating press alignment.


Density

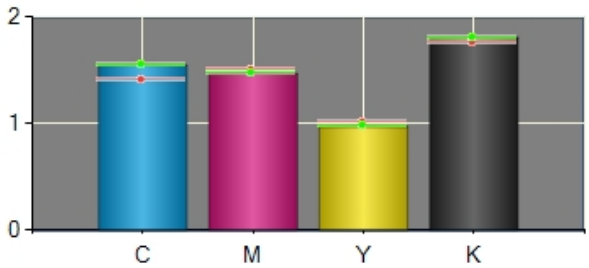


	Cyan	Magenta	Yellow	Black
Target	1.40	1.50	1.00	1.75
Actual	1.55	1.47	0.97	1.81
Previous	1.55	1.47	0.97	1.80

The red lines indicate the targeted density. The green lines indicate the previous run.

Black NPD

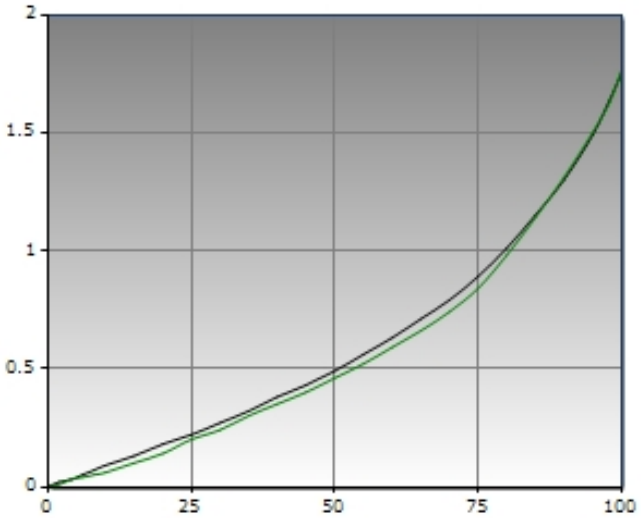

Gray NPD

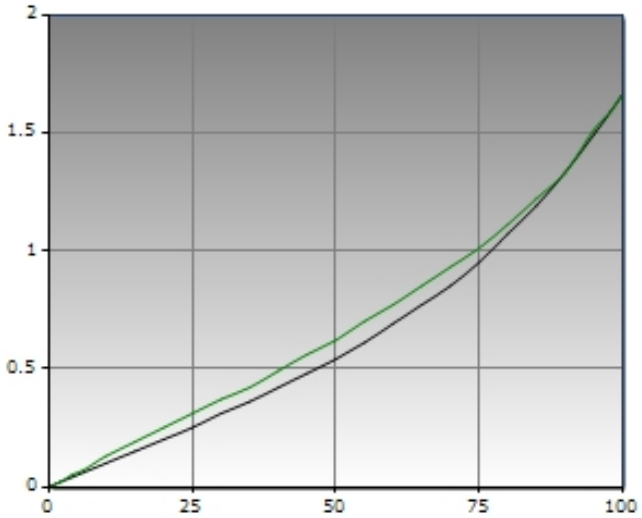

© Fujifilm North America Corporation, Graphic Systems Division

FUJIFILM
Value from Innovation


Press Alignment Report

ColorPath SYNC™

Colorimetric Aims


	Target			Actual			ΔE00 Tol.	ΔE00 Act.
	L*	a*	b*	L*	a*	b*		
C	55.00	-37.00	-50.00	53.19	-33.83	-53.57	N/A	5.11
M	48.00	74.00	-3.00	46.48	74.80	-3.86	N/A	1.92
Y	89.00	-5.00	93.00	89.40	-5.83	91.87	N/A	1.46
K	15.00	0.19	-0.13	12.59	2.21	4.16	N/A	5.32
R	47.50	68.00	49.00	45.66	70.09	50.45	N/A	3.14
G	50.00	-68.00	25.00	47.04	-72.30	25.30	N/A	5.23
B	24.00	17.00	-46.00	17.87	24.52	-49.16	N/A	10.20
Substrate	95.00	0.00	-2.00	93.79	-0.13	0.53	N/A	2.81
CMY	23.09	0.17	-0.24	14.73	0.94	-2.89	N/A	8.81

ΔE Primary Aims

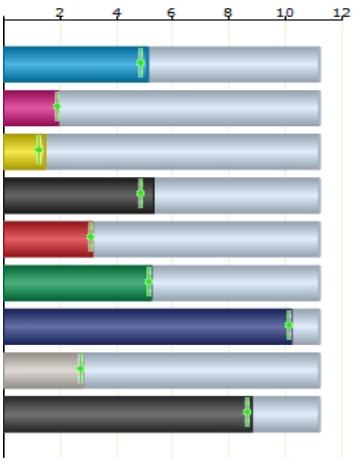


Colorimetric aims are obtained from the characterized reference print condition chosen as the color target. Red lines indicate tolerances and green lines indicate the previous run.


a* b* Aims: Spider Plot

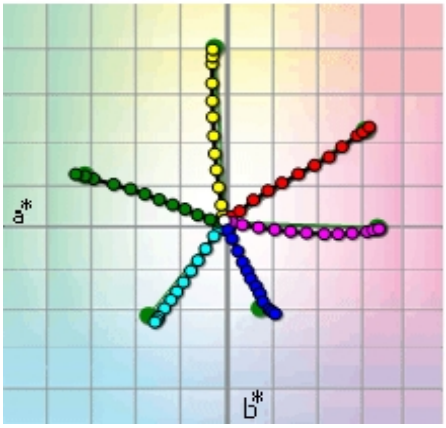


a* b* Aims: Actual vs Target

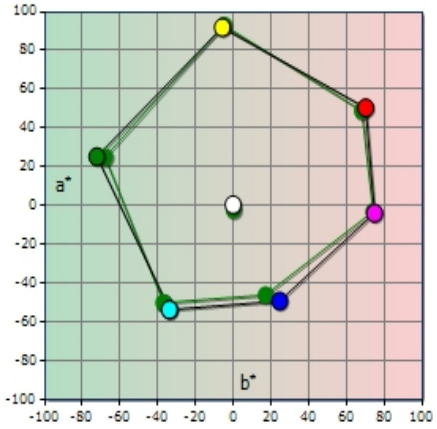

L* Aims: Actual vs Target



Gray Balance L*a*b*

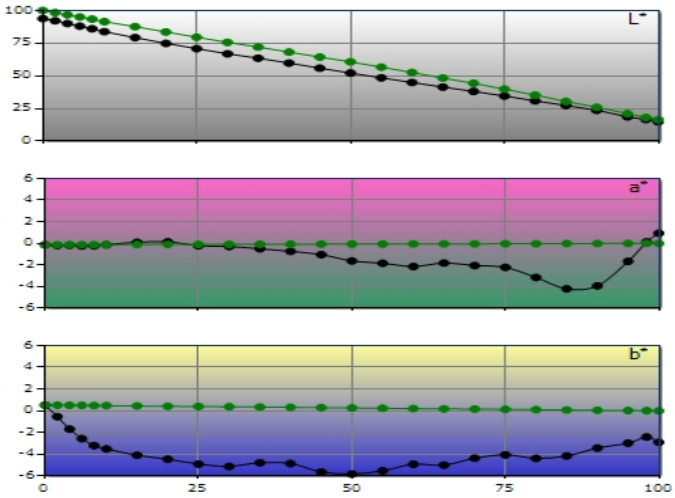


These three plots show the lightness variation (L*) and any color casts in gray (a* and b*).
L* shows lightness — the lower the value the darker the color.

a* shows the red-to-green hue axis. A positive value is red; a negative value is green.

b* shows the yellow-to-blue hue axis. A positive value is yellow; a negative value is blue.

TVI

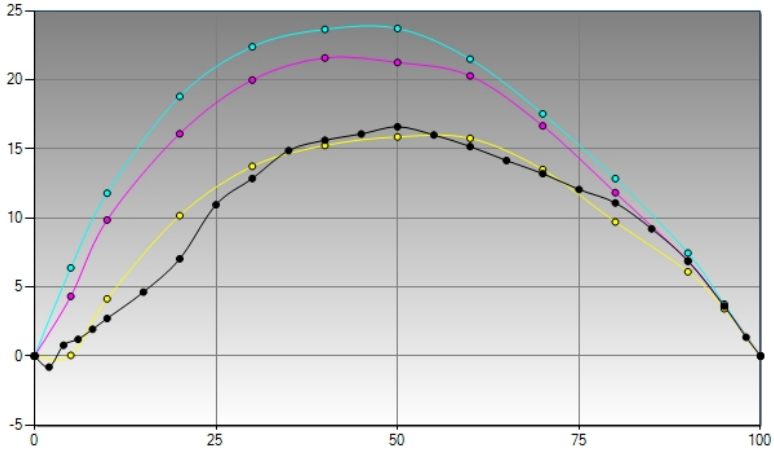

Tone Value Increase is a useful process control measurement that can indicate potential problems with the press or platemaking. For example, a large fluctuation of dot gain of the same density on the same paper shows us to look to a particular unit as it relates to press cylinder or plate.

IDEAlliance®, G7®, GRACoL® and SWOP® are registered trademarks of IDEAlliance.

© Fujifilm North America Corporation, Graphic Systems Division